





SUNTAS SOLAR ENGINEERS

ADD : 91, Wellington Road, Clayton, VIC 3168 Australia.
TEL : +61452614936 EMAIL : info@suntassolar.com



M72PCS-205W,200W,195W,190W Product Specification

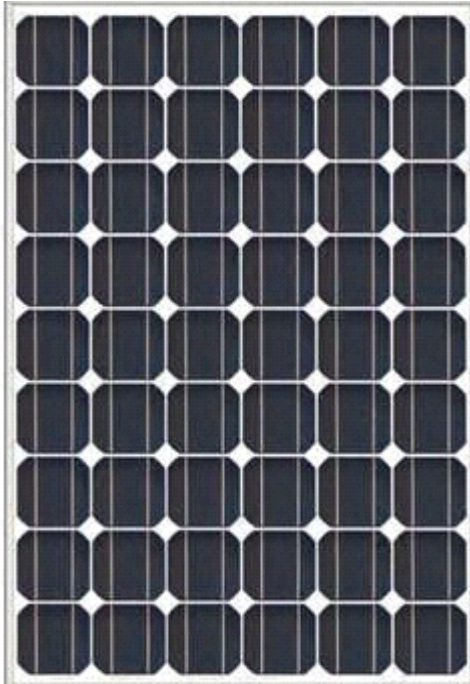


- Industry leading module power output warranty
- International quality, safety and performance certifications
- Manufacturing facility certified to ISO9001 Quality Management System standards
- Beautiful appearance, good durability & easy installation
- Special design in accordance with requirements of customers

CERTIFICATES




WARRANTIES

- 10 years for product defects in materials&workmanship
- 10 years for 90% of warranted minimum power output
- 25 years for 80% of warranted minimum power output

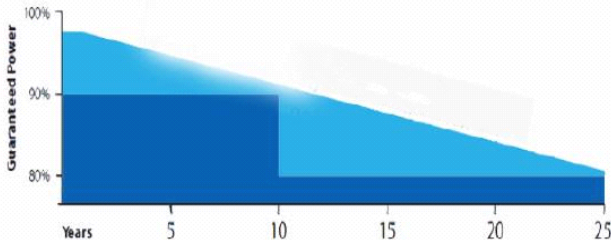


25 years linear warranty

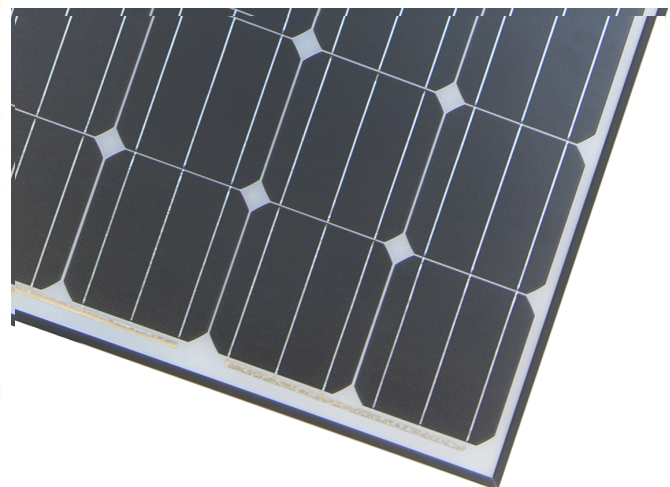

Electrical parameters at Standard Test Conditions
(STC:AM=1.5, 1000W/m², cells Temperature 25 °C)

I-V CURVE

Typical Type	205W	200W	195W	190W
Max-Power (Pmax) w	205W	200W	195W	190W
Max-Power Voltage (Vmp)	37.8	37.77	37.62	37.44
Max-Power Current (Imp)	5.42	5.29	5.18	5.08
Open-Circuit Voltage(Voc)	45.36	45.25	45.07	44.86
Short-Circuit Current (Isc)	6.12	5.92	5.8	5.68
Max-System Voltage	DC1000V			
Cell efficiency (%)	18.75	18.3	17.8	17.3

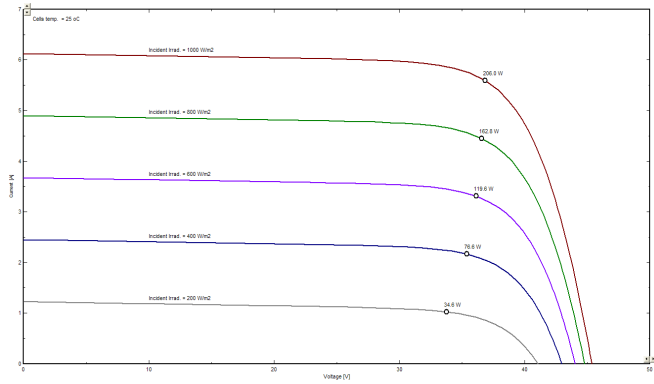

MECHANICAL DATA

Dimensions	1580*808*35mm
Weight	15kgs
Front Glass	3.2 mm tempered glass
	TUV (2Pfg1169:2007)
Output Cables:	4mm ² (0.006 inches ²), symmetrical lengths 900 mm
Connectors:	MC4 compatible IP67
cell type:	Mono Crystalline silicon, 125MM*125MM
Number of cells:	72 cells in series


TEMPERATURE CHARACTERISTICS

Temp.Coeff.of Isc(TK Isc)	0.037% / °C
Temp.Coeff.of Voc(TK Voc)	(-0.34%) / °C
Temp.Coeff of Pmax(TK Pmax)	(-0.48%) / °C
Operating Temperature	(-40~+85)°C
Nominal Operating Cell Temperature	45 ±2 °C

PACKING CONFIGURATION

Container	20'GP	40'GP	40'HQ
Pieces per Pallet	66-52	66	74
Pallets per Container	6+1	14	14
Pieces per Container	448	924	1036

DIMENSIONS AND STRUCTURE

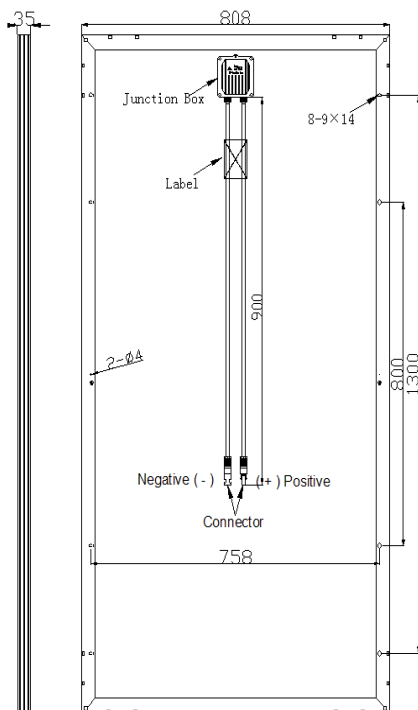

TESTS, CERTIFICATIONS AND WARRANTIES

Standard tests	IEC 61215, IEC 61730
System certs	ISO 9001, ISO 14001
Certifications	TUV, CE, MCS, PV CYCLE, CEC, CHUBB
Extreme wind and snow loads testing	withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal)
Positive tolerance	0~+3%
Junction Box	≥IP65 Rated
Warranties	10-year material and workmanship and 25-year output at least 80%.