


# PhotoMark® Reflections 360-3™ Datasheet

## OVERVIEW

What's better than a durable backsheet with no PET or Fluoropolymers? How about a durable backsheet with no interlayer adhesives?

That's right – Tomark-Worthen has created a revolutionary new backsheet based on a proprietary polyamide alloy that is weatherable, dimensionally stable and cost effective - and it does not contain any Fluoropolymer or PET layers and does not use any adhesives! Our backsheet is not susceptible to hydrolysis or UV degradation.

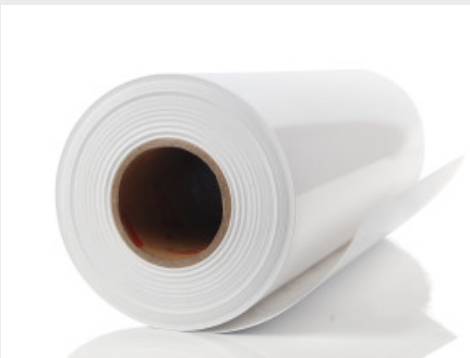

## MATERIAL COMPOSITION

Test	Results
Voltage Rating	≤ 1,500 V
Weight	404 g/m <sup>2</sup>
Thickness	360 µm
Colors (front/back)	Wht/Wht, Blk/Blk, Blk/Wht
Roll Sizes (width)	50cm-140cm

## TECHNICAL CHARACTERISTICS

Test	Method	Reflections™ 360
EVA Peel Strength	IEC 62788-2	> 80 N/cm
Shrinkage after 30 min at 150°C	TUV-SUD Method	0.75% / 0.51% (MD/TD)
Dielectric Breakdown	UL 746A	31.2 KVDC
Comparative Testing Index (CTI)	IEC 60112	600 V
Relative Thermal Index (RTI)	UL 746B	125 °C
MVTR	ISO 15106-2	1.5 g/m <sup>2</sup> /day
Damp Heat Testing	TUV-SUD Method	≥ 2000 hours
UV Stability/Color	TUV-SUD Method	> 5000 hours
Reflectance	R500 (%)	81 %
Distance Through Insulation (DTI)		Pass
Tensile Strength (MD / TD)	ASTMD882	55 mPa / 57 mPa
Elongation (MD / TD)	ASTMD882	370% / 350%

\*Theoretical nominal

This product is covered by one or more U.S. patents and pending U.S. and other patent applications.  
Typical Data - Not Specification



TUV / VDE  
PD Cert.

Tomark-Worthen  
64 Watkin Ave  
Chadds Ford, PA 19317  
USA

Phone: 1-610-978-1889  
Email: [info@tomark-worthen.com](mailto:info@tomark-worthen.com)  
[www.tomark-worthen.com](http://www.tomark-worthen.com)

**TOMARK**  **WORTHEN**