

S5515 TL

S35.132.350

S11015 TL

S31.042.350



MAXIMUM EFFICIENCY

98.9 %

OUTPUT VOLTAGE

400 V_{AC} ± 10%

MPPT VOLTAGE RANGE

675 - 1.250V_{DC}

Advantage




- > High efficiency, up to 99%.
- > Modular inverter (MPS system).
- > Elimination of machine down-times.
- > Easy maintenance.
- > Large lifetime.

- > Elevato rendimento fino al 99%.
- > Inverter modulari (sistema MPS).
- > Eliminazione dei fermi macchina.
- > Facilità nelle operatività di manutenzione.
- > Lunga durata dei componenti.

Features

- > Use of a single magnetic component each module.
- > Advance modularity (according to IPCCM algorithm).
- > Continual monitoring of the system and integrated datalogger.
- > Outbound communication.


- > Impiego di un singolo componente magnetico per ciascun modulo.
- > Modularità all'avanguardia (secondo l'algoritmo IPCCM).
- > Supervisione continua del sistema e datalogger integrato.
- > Comunicazione verso il mondo esterno.

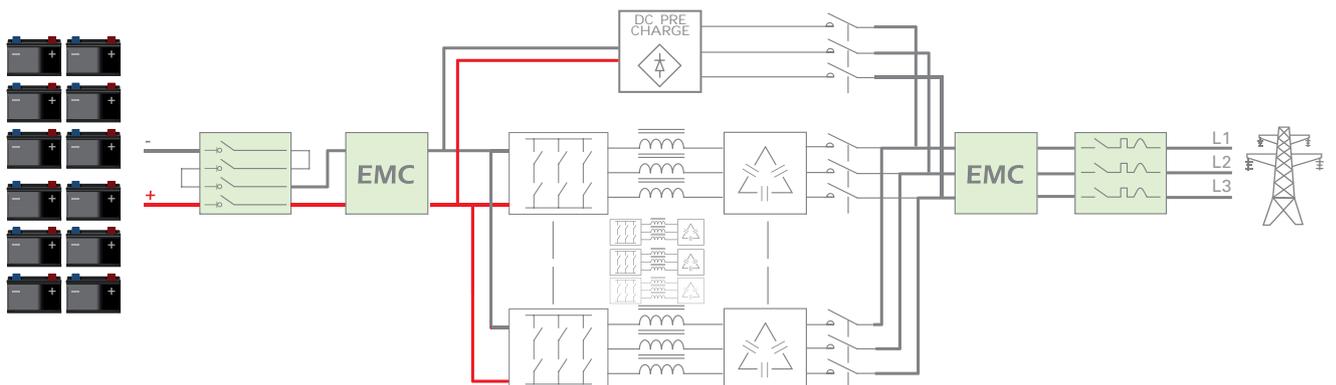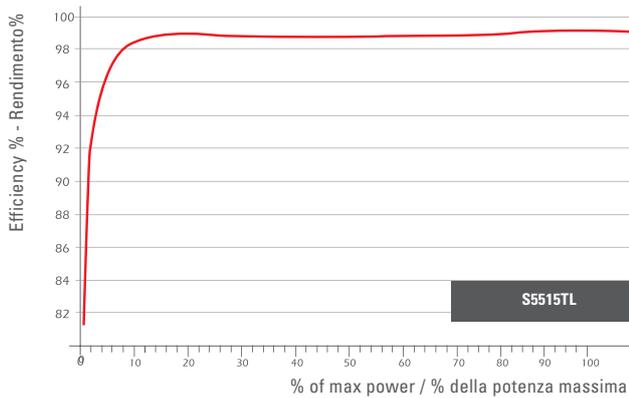

Note: Block diagram refers to the converter S5515TL
Lo schema a blocchi si riferisce al convertitore S5515TL

S5515 TL

S11015 TL

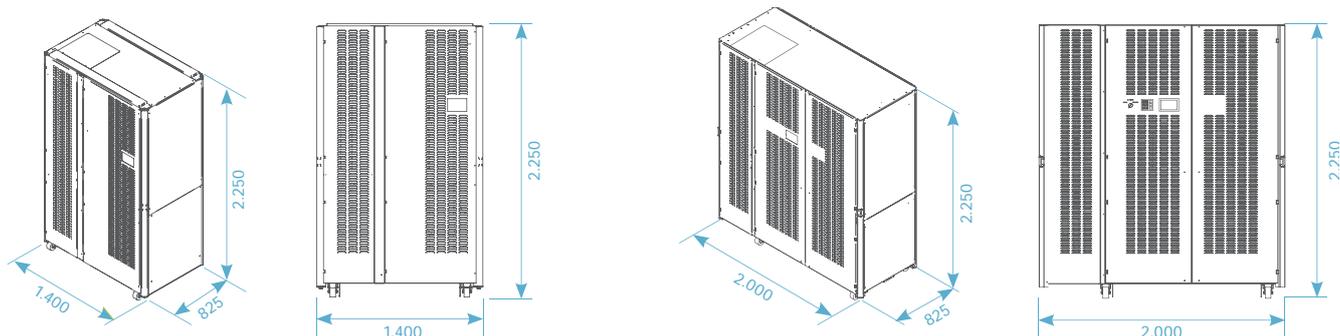

DC Input - PV Module

| Model | S5515 TL | S11015 TL |
|---------------------------------------|--|--|
| Battery voltage Range (V_{DC}) | 675 – 1.250 | 675 – 1250 |
| Battery type | Li-ion, Lead, Ni-Cd, NaNiCl ₂ | Li-ion, Lead, Ni-Cd, NaNiCl ₂ |
| Absolute Maximum Voltage (V_{DC}) | 1.500 V | 1.500 V |
| Maximum input current (A_{DC}) | 1.250 A | 1.600 A |
| Voltage Ripple | <2% | <2% |
| Number of input max in parallel | 4 | 4 |
| Overvoltage Protection | SPD varistor device Class II (optional Class I+II) | SPD varistor device Class II (optional Class I+II) |
| DC input connection | DC Switch under load | DC Switch under load |
| Reverse Polarity Protection | Yes | Yes |

AC Output grid

| | | |
|--|--|--|
| Max Power (kW) (Note1) | 512 kW | 1.025 kW |
| Max Apparent Power (kVA) | 512 kVA | 1.025 kVA |
| Max Current (A_{AC}) | 740 A | 1.480 A |
| Max unbalance Current | < 2% | < 2% |
| Nominal Voltage (V_{AC}) | 400_{RMS} ±10% | 400_{RMS} ±10% |
| Frequency (Hz) | 50 / 60 | 50 / 60 |
| Nr Phase | 3 (L1 – L2 – L3 – PE) | 3 (L1 – L2 – L3 – PE) |
| Aux Supply (Normal Line) ($V_{AC} - I_{AC}$) | 230Vac – 16A – 50/60Hz (L-N) | 230Vac – 16A – 50/60Hz (L-N) |
| Aux Supply (Preferential Line) ($V_{AC} - I_{AC}$) | 230Vac – 10A – 50/60Hz (L-N) | 230Vac – 10A – 50/60Hz (L-N) |
| Distortion factor (THD) (Note 2) | <3% | <3% |
| Power Factor (Note 3) | From 0 to 1 inductive or capacitive | From 0 to 1 inductive or capacitive |
| Galvanic insulation | No (Transformerless) | No (Transformerless) |
| AC input connection | Magneto-thermic Circuit Breaker (MCCB) | Magneto-thermic Circuit Breaker (MCCB) |

General Data

| | | |
|--|---|---|
| Max Efficiency | 98,9% | 98,9% |
| European Efficiency | 98,6% | 98,6% |
| Night consumption (W) | <60 | <60 |
| Weight (kg) | 1.100 | 1.600 |
| Protection degree | IP20 (Opt. IP31) | IP20 (Opt. IP31) |
| Cooling | Air forced cooling fan speed controlled | Air forced cooling fan speed controlled |
| Air Flow | 2400 m ³ /h | 4.800 m ³ /h |
| Maximum power dissipated in overload condition | 12,5 kW - 10.705 Kcal/h | 24,9 kW - 21.410 Kcal/h |
| Noise level (dBA) | 70 dBA | 70 dBA |
| Dimensions (H x L x P) | 2.250 x 1.400 x 825 | 2.250 x 2.000 x 825 |
| Operating temperature (°C) | - 10 ÷ +53 | - 10 ÷ +53 |
| Storage temperature (°C) | - 20 ÷ +60 | - 20 ÷ +60 |
| Humidity (Not condensing) (%) | 0 ÷ 95 | 0 ÷ 95 |
| Height above the sea without derating (Note 4) | 1.500 m | 1.500 m |
| Overvoltage Category | II | II |
| Color | RAL 9006 | RAL 9006 |

Note 1: Valid at PF=1 and Vac nominal

Note 2: THDi is lower than 3% for inverter power greater than 25%.

Note 3: P-Q capability is circular.

Note 4: Above 1500 m derate the Maximum Operating Temperature of 0.4 °C per 100 m up to 3000 m a.s.l.

Note: Each inverter must be connected separately to its own LV/MV transformer or it has to be connected to a separate LV secondary input of the LV/MV transformer. Two or more inverters cannot be connected in parallel to the same LV secondary input of the LV/MV transformer.