

TECHNICAL SPECIFICATION

BIC1230100i Bi-Directional (230V Series) 3000W Inverter + 100A Charger




Product features

- Combines a 3000W DC-AC Inverter plus transfer switch with a 100A multi-stage battery charger.
- True sinewave output identical to or better than power provided by the local utility company.
- Multi-stage battery charging ensures batteries are charged to battery manufacturer's recommendations.
- Variable settings offered for Gel, Flooded, AGM, Lithium, Programmable, and Power Supply batteries.
- High start-up surge rated 2X continuous power rating.


Product dimensions

Length: 19.7", Width: 12.1", Height: 4.2" (500mm x 307mm x 106mm)

System diagram

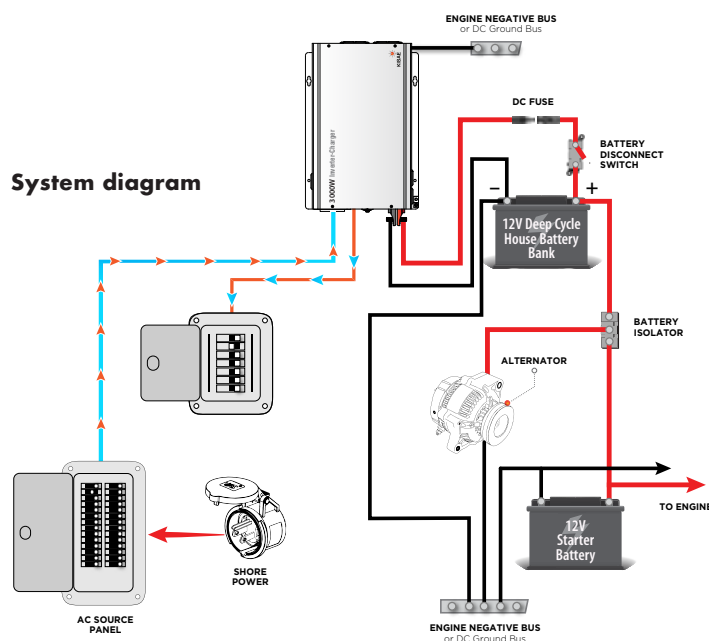

Available output sockets

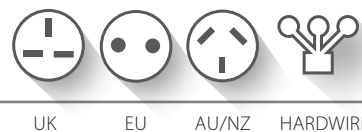

Specifications subject to change without notice.

BIC1230100i Bi-Directional (230V Series) 3000W Inverter + 100A Charger

Inverter

AC Output Power (Continuous)	3000W
AC Output Power (Peak - 1 second)	6000W
AC Output Voltage/Frequency	230 VAC / 50 Hz
AC Output Current	13A
AC Output Current (Peak)	26A max (with max power limitation)
AC Output Waveform	True Sinewave (<5% THD)
Peak Efficiency	90%
Input Voltage (nominal)	12.5Vdc
Input Voltage Operation Range	10.5 - 16.5Vdc
Inverter Standby Current	<3.5A
Input Standby Current (PowerSave)	< 0.6A

Battery Charger

Charger Voltage Range	13.8 - 14.8 V (Selectable)
Float Voltage Range	13.0 - 14.0 V (Selectable)
Charger Current	25 - 100A
Charger Battery Type	Gel, Flooded, AGM, Lithium, Programmable, Power Supply
Charging Stages	Check, Bulk, Absorption, Float, Recharge
Recharge Voltage Range	12.8 - 14.0 V (Selectable)
Recharge Timer	7 days (automatic)
Power Sharing	Reduce Charger Current when heavy AC Load is connected

AC Transfer Switch

AC Input Voltage/Frequency	230 VAC (Accept MSW AC Input)
AC Input Voltage Acceptance Range:	192 - 265 VAC
Transfer Time	< 30ms
Transfer Relay Rating	16A
AC Input Port	Hardwire 16A Heavy Duty Connector
AC Output Port	Hardwire 16A Heavy Duty Connector
AC Input Socket	EU, UK, AU/NZ

Protection

Battery Input Undervoltage Shutdown:	10.5 - 12.0Vdc (with dynamic control)
Battery Input Undervoltage Warning:	11.0 - 12.5Vdc
Battery Input Undervoltage Recovery:	N/A
Battery Input Overvoltage Shutdown:	16.5Vdc
Inverter Overload Warning/Shutdown:	2800W / 3300W
Unit Over-temp Warning/Shutdown:	Yes

Display (Main Unit)

Power On/Off Switch	Yes (Push Button)
Indicator	3 LEDs (Power, AC Output, Unit Status)

Display (continued)

Remote Display Port	For Remote Display Panel use
Battery Temperature Sensor Port:	For use with Battery Temperature Sensor (BTT)
Ignition Start Port	For use with Vehicle 'ACC' signal

Remote Display Panel (External)

Indicator (LED)	Power, AC Output, Unit and Battery Status
Display Type	LCD with backlighting
Numerical Display Function	Battery Voltage, AC Power, DC Current
Graphics Display Function	AC Bypass, Battery Power, AC Input, Battery Status Warning/Fault Code
Communication	CAN BUS, Bluetooth (optional)
USB Port	Unit software upgrade


Regulatory Compliance

Markings	CE
Conformance	LVD, EMC
EMI/EMC	CE EMC / Tested E9-09

Size

Dimensions (L x W x H)	19.7" x 12.1" x 4.2" (500mm x 307mm x 106mm)
Net Weight	22.9 lbs. / 10.4 Kg

Schematic Drawings

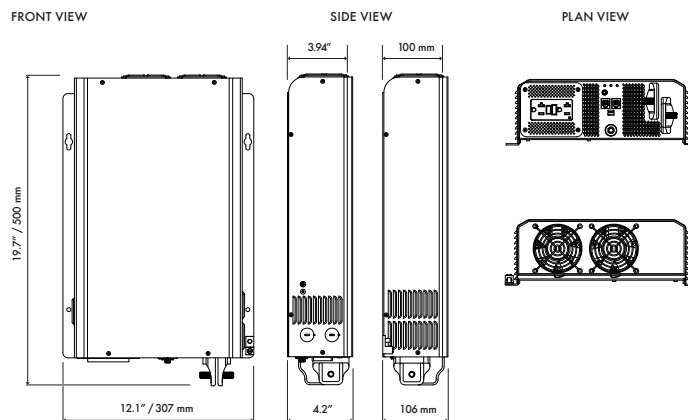

Standard warranty

1 year warranty



All specifications subject to change without notice.
Copyright © 2020 Kisae Technology Inc. All Rights Reserved under UCC I-207 without prejudice.

To learn more about this and other fine Kisae products please contact:
info@kisaetechnology.com

kisaepower.com

Distributor: