





Monocrystalline cells

单晶硅电池片156.75×156.75(Φ 210)

Monocrystalline cells

技术参数 Technical parameters

输出功率 Output power: 4.84 ~ 4.98W
 平均转换效率 Average conversion efficiency: ≥20.2%
 开路电压 Open-circuit voltage: 0.64 ± 0.02V
 串联电阻 Serial resistance: 4mΩ ± 2mΩ
 并联电阻 Parallel resistance: 100Ω (平均值 Avg)
 厚度 Thickness: 210 ± 20μ m

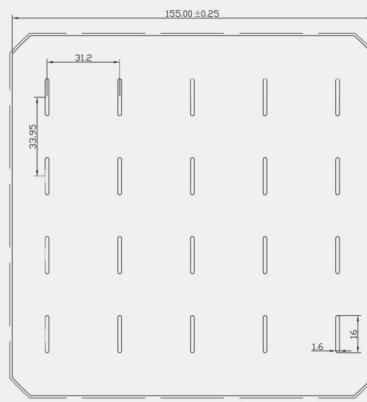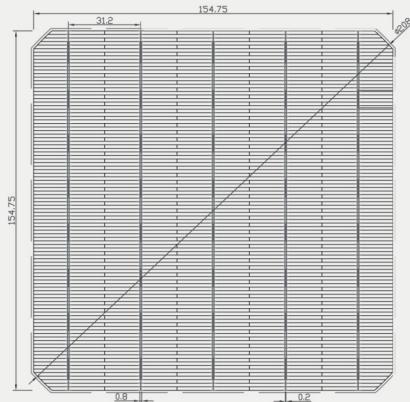

单晶电池电参数 Electric parameters of monocrystalline cells

Model	Effciency(%)	Pmpp(W)	Uoc(V)	Isc(A)	FF(%)
1	20.4%~20.5%	4.98	0.645	9.56	80.8
2	20.3%~20.4%	4.96	0.644	9.55	80.7
3	20.2%~20.3%	4.94	0.643	9.54	80.6
4	20.1%~20.2%	4.91	0.642	9.53	80.3
5	20.0%~20.1%	4.89	0.642	9.51	80.2
6	19.9%~20.0%	4.86	0.641	9.48	80.1
7	19.8%~19.9%	4.84	0.641	9.46	79.9

电池片特点

- 1.电池转换效率高，电性能衰减小
- 2.使用寿命≥25年，工作输出稳定
- 3.采用先进的PECVD设备，电池外观颜色均匀一致
- 4.电池电极具有良好的可焊性，易于自动焊接
- 5.具备良好的抗PID特性

Cell features

- 1.High photoelectric conversion rate
- 2.Life time: ≥25 years, small attenuation, stable operation
- 3.Adopting advanced PECVD equipment and first-class suede technology to make the color beautiful and uniform
- 4.Screen print pattern of high precision and good evenness make it easy to weld and cut the cells automatically
- 5.Excellent resistance performance of PID