

RSC-P PWM Solar Charge Controller

Feature:


- 10A 20A 30A 50A 60A solar charge controller
- Vivid LCD graphic symbols
- Simple button operation
- Automatic identification of system voltage level
- Intelligent PWM charging mode
- Adjustable charge-discharge protection
- Automatic temperature compensation
- Settable operation mode of load
- Battery reverse-discharge protection
- Battery low voltage disconnection(LVD)
- Battery reverse connection protection
- Over current protection
- USB output



Introduction:

This intelligent, multi-purpose solar charge and discharge controller from Rekoser has a very friendly interface of fixed LCD display. Various control parameters can be flexibly set, fully meet your various application requirements.

LCD Display Information

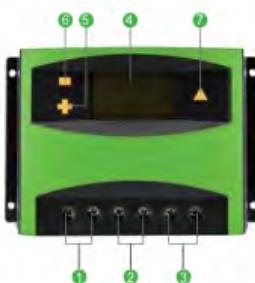

Inner Details



Stability, high efficiency, high integration



Optimized circuit design




SCM accurate control




Selection of quality materials

Button	Operation	Function
5. +	Short press	Next display page; Increase when setting parameters
	Long press (≥ 3 s)	Increase value continuously when setting parameters
6. -	Short press	Previous display page; Decrease when setting parameters
	Long press (≥ 3 s)	Reduce value continuously when setting parameters
7. ▲	Short press	Switch on/off load ; Enter setup/save parameters
	Long press (≥ 3 s)	Access/exit secondary loop interface

Solar System Connection

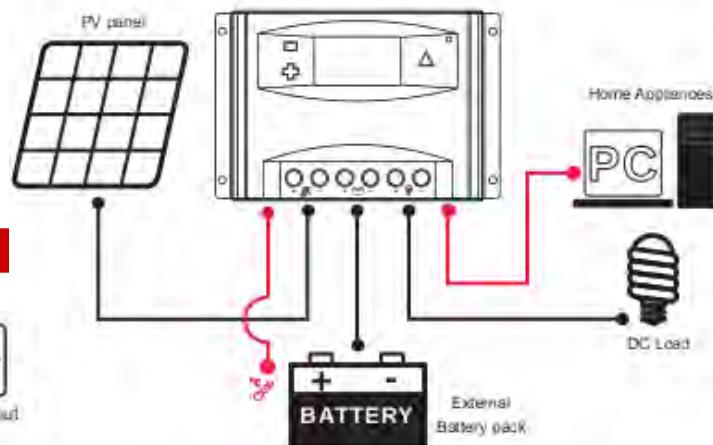

Functions

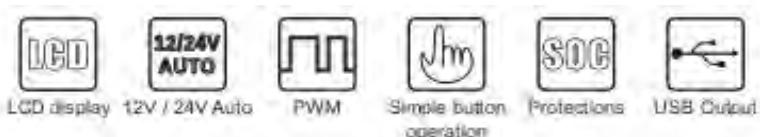

SERIES Controllers**Model: RSC1224-20PU**

Rated Voltage: 12V/24V Auto identified
 Rated Current: 20A
 USB Port: 5V, 1A x 2

 Packing info: 30pcs / carton
 Carton size: 535mm x 425mm x 200mm
 Gross weight: 12Kg
 Volume: 0.045m³

**Model: RSC1224-30PU**

Rated Voltage: 12V/24V Auto identified
 Rated Current: 30A
 USB Port: 5V, 1A x 2
 LCD screen size: 2.2"

 Packing info: 30pcs / carton
 Carton size: 535mm x 425mm x 200mm
 Gross weight: 12Kg
 Volume: 0.045m³

**Model: RSC1224-40P, 50P**

Rated Voltage: 12V/24V
 Rated Current: 40A, 50A

 LCD screen size: 2.6"
 Temperature sensor port: x1
 Communication port: RJ45 (Optional)

 Packing info: 24pcs / carton
 Carton size: 545mm x 425mm x 205mm
 Gross weight: 14Kg
 Volume: 0.047m³

**Model: RSC1224-60P**

Rated Voltage: 12V/24V
 Rated Current: 60A

 LCD screen size: 2.6"
 Temperature sensor port: x1
 Communication port: RJ45 (Optional)

 Packing info: 24pcs / carton
 Carton size: 545mm x 425mm x 205mm
 Gross weight: 17Kg
 Volume: 0.047m³

ApplicationRV, boat & field power supply
solar systemOff-grid
home solar system

Farm solar generation system

SPECIFICATION

MODEL		RSC1224-40P ,50P		RSC1224-60P		RSC48-50P		RSC48-60P			
INPUT	PV voltage			≤50V				≤100V			
	Rated current	40A	50A	60A		40A	50A	60A			
System voltage		12/24V Auto				48V					
High voltage disconnection		16.00V x 1/ x 2/ x 3/ x 4 (0.5V)									
Rated discharging current		40A	50A	60A		40A	50A	60A			
No load loss		≤13mA				≤25mA					
Charge loop voltage drop		≤0.21V		≤0.24V		≤0.25V		≤0.25V			
Discharge loop voltage drop		≤0.12V		≤0.10V		≤0.12V		≤0.10V			
OUTPUT	Charging mode				PWM 4-stage bulk, absorption, float, equalized						
	Float charging voltage				13.8V (13V~15V) x 1/ x 2/ x 3/ x 4						
	Absorption charging voltage	Duration 2 hours			14.4V (13V~15V) x 1/ x 2/ x 3/ x 4						
	Equalized charging voltage				14.6V (13V~15.5V) x 1/ x 2/ x 3/ x 4						
	Low voltage protection				10.7V (10V~14V) x 1/ x 2/ x 3/ x 4						
	Low voltage reconnecting				12.6V (10V~14V) x 1/ x 2/ x 3/ x 4						
	USB output		5V, 1A				None				
OTHER	Installing cables size		≤6mm²		≤16mm²		≤6mm²		≤16mm²		
	Working temperature				-20°C~55°C						
	Dimention(L x W x H)				188mm x 95mm x 46.5mm						
	Net weight		355g		360g		355g		360g		

*Product specifications are subject to change without further notice.