

ATESS PBD250



LEADING - EDGE TECHNOLOGY

Overview

1000V level DC to DC solar charge controller, used together with ATESS PCS and bypass for large scale solar project

Features



Multiple units paralleled



Up to 5 MPPT




Modular design



Transformerless design

Block Diagram

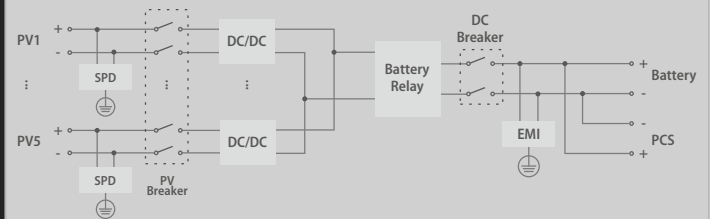

Shenzhen Ateess Power Technology Co.,Ltd

1st Floor of Building 3 at Sector B and 3rd Floor of Building 9, Henglong Industrial Park, No.4 Industrial Zone, Shuitian Community, Shiyan Street, Baoan District, Shenzhen

Datasheet

ATESS PBD250

Input (PV)

Recommended PV power	250kW
MPPT voltage range	350V-850V
Full load MPPT voltage range	480V-850V
Max input current	575A(115A*5)
Number of MPPT	5

Output (Battery and PCS)

Output voltage	600V-900V
Max. charge power	250kW
Max. charge current	416A
Max. charge efficiency	99%

Protection

Input & output OV/UV protection	Yes
Input & output OC protection	Yes
Short circuit protection	Yes
Over temperature protection	Yes
Lightning protection	Type II
DC breaker	Yes
Emergency stop	Yes

General Information

Protection degree	IP20
Noise emission	<65dB(A)@1m
Operating temperature	-25°C~+55°C
Cooling	Forced-air
Relative humidity	0-95% non-condensing
Maximum altitude	6000m (derate above 3000m)
Dimension (W/H/D)	850/1900/700mm
Weight	600kg
Topology	Transformerless
Standby power	<100W

Communication

Display	Touch screen
Communication	RS485/ CAN