


- **HSM 165W-180W**
Mono-Crystalline Solar Module

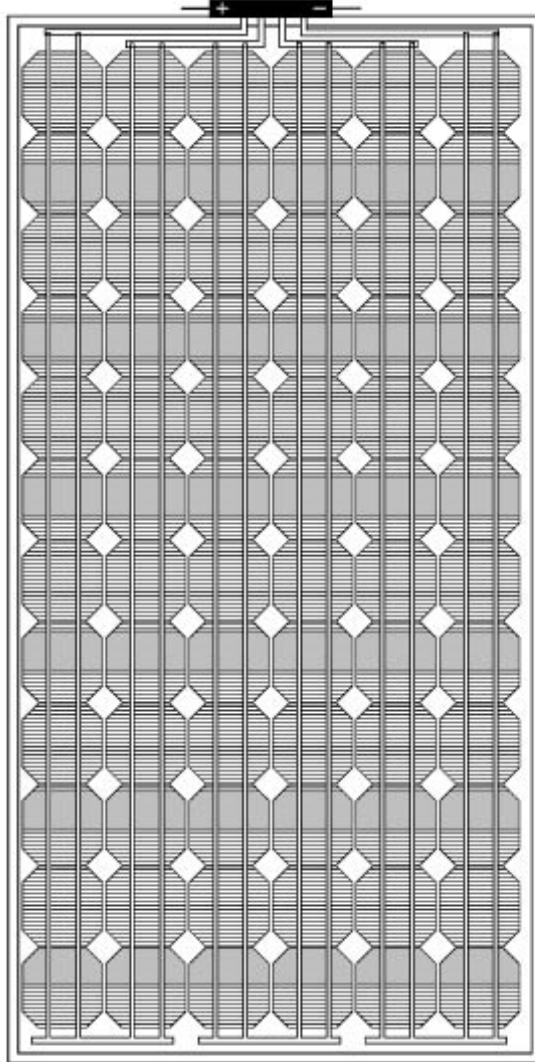


Hisem offers photovoltaic modules with efficient and reliable performance for residential, commercial and other installations both on-grid and off-grid.

Product Description

Our mono-crystalline module has 72 pieces of crystalline silicon cells connected in series. The module is produced to meet with international standards. Its high efficiency and compact size make it an ideal choice.

Features and Advantages

- The solar cells used in the module are coated with a blue antireflection silicon nitride to ensure their good appearance and high efficiency.
- The modules are laminated by layers of toughened glass with high transparency, EVA with good anti-aging performance, solar cells with high conversion efficiency and TPT with excellent durability, water resistance and able to withstand hail.
- Anodized aluminum frame that improves resistance to heavy wind loads.
- The sealed multi-purpose connecting boxes with good waterproof performance are used to provide a variety of connection patterns.
- Every module is inspected for appearance and tested for electrical performance to ensure its excellent quality.
- Module size can be tailored to customers' special requirements.
- High quality product warranty for up to 25 years.

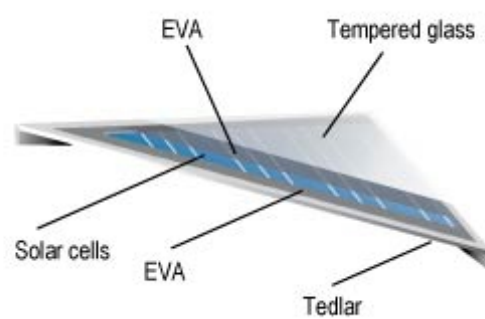


Applications

- On-grid and off-grid systems for residential and commercial building roofs
- Power supply for remote telecommunication equipment
- Rural electrification
- Water pumping systems
- Solar farms
- Other on-grid and off-grid applications

Solar Panel


Dimensions

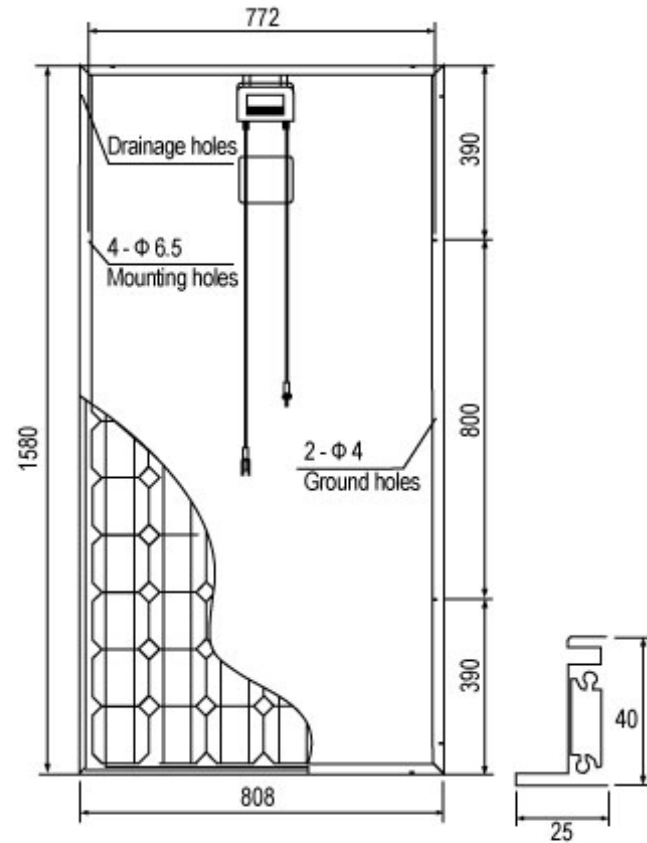

General Data

| | |
|-----------------------------|----------------------------------|
| Cell | Mono-crystalline 125 mm × 125 mm |
| No. of cells | 72 in series (6 × 12) |
| Weight | 17 kg |
| Dimensions | 1580 × 808 × 40 (mm) |
| Produced in accordance with | IEC 61215Ed.2 |
| ROHS | IECQ Certification |

I-V Curves

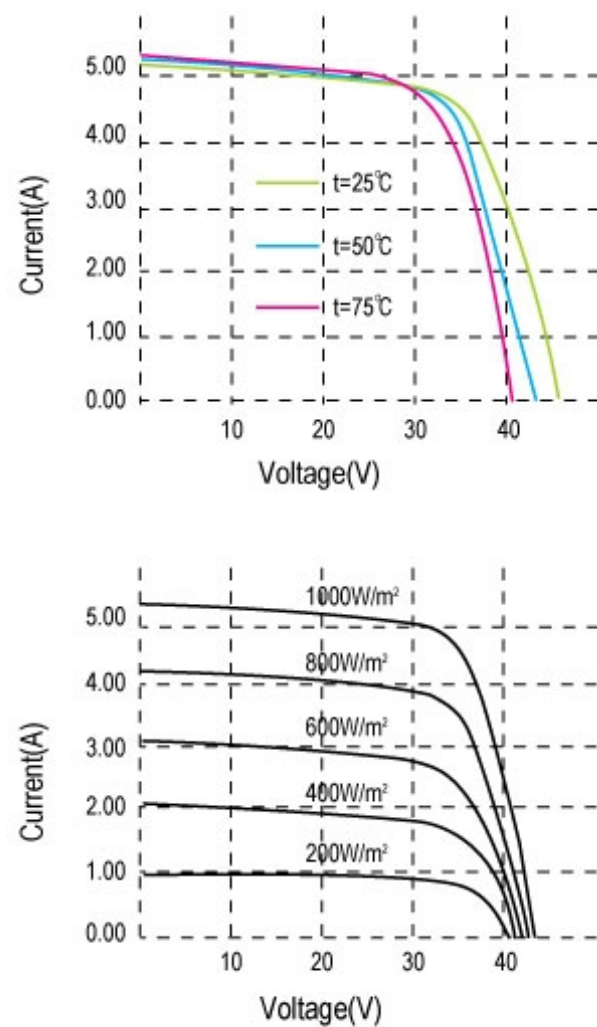

Electrical Data

(STC: Irradiance 1000W / m², module temperate 25°C, AM=1.5)

| Power | 165Wp | 170Wp | 175Wp | 180Wp |
|--------------------------------|----------------|-------|-------|-------|
| Open circuit voltage | 43.7V | 43.9V | 44.0V | 44.5V |
| Maximum power voltage | 35.0V | 35.5V | 35.6V | 36.0V |
| Short circuit current | 5.14A | 5.25A | 5.40A | 5.45A |
| Maximum power current | 4.71A | 4.79A | 4.92A | 5.00A |
| Maximum system voltage | 1000V | | | |
| Operating temperature | -40°C to +90°C | | | |
| NOCT | 45°C ± 2°C | | | |
| Temperature coefficient of Isc | +0.05% / °C | | | |
| Temperature coefficient of Voc | -0.34% / °C | | | |
| Temperature coefficient of Pm | -0.5% / °C | | | |

Specifications included in this datasheet are subject to change without prior notice.