

# KS-250B

## General information:

Type of module:	Monocrystalline PV module
Front cover:	Strengthened patterned 3.2 mm glass
Filler:	EVA
Type of cells:	Monocrystalline
Number of cells:	60
Frame:	39.5 mm black anodised aluminium
Backsheet:	Black Tedlar
Connection box:	TYCO IP65 connection, with rectifier diode
Wire:	1-1 m long, 4 mm <sup>2</sup> solar cable, with TYCO SOLARLOK terminals

## Electrical information:

Type:	KS-250B
Tolerance (%):	-1/+3
Peak power (Wp):	250
MPP voltage (V):	31,38
MPP current (A):	8,03
Open-circuit voltage (V):	37,29
Short-circuit current (A):	8,56
Operating temperature (°C):	- 40 - +85
Maximum system voltage (V):	1000
Conversion efficiency (%):	15,44

Standard test conditions: air mass AM 1,5 – irradiation: 1000 W/m<sup>2</sup> – cell Temp.: 25 °C

## Temperature coefficients:

Voc:	-0,297 %/K
Isc:	0,037 %/K
Pmax:	-0,438 %/K

## Mechanical information:

Module dimensions:	1657 x 977 x 39.5 mm
Module surface area:	1,61 m <sup>2</sup>
Weight:	19 kg

## Warranty conditions:

Material and workmanship:	10 years
Output power 90%:	10 years
Output power 80%:	25 years

## Qualifications and certifications:


CE IP65



MANUFACTURER CERTIFIED  
ACCORDING TO ISO 9001:2000



IEC 61215 ED.2  
and IEC 61730




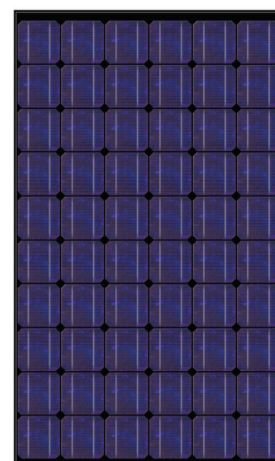


Due to our policy of continual improvement the products covered by this brochure may be changed without notice.




Korax Gépgyár Kft. - Solar Module Division  
2300 Ráckeve, Sillingi út 30. Hungary, Tel.: +36 24 485 402 Fax.: +36 24 485 603  
www.koraxsolar.com, www.korax.hu, email: mail@koraxsolar.com

# KS-250B

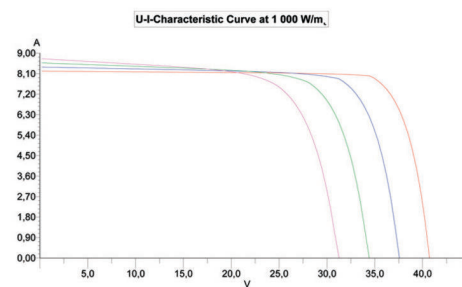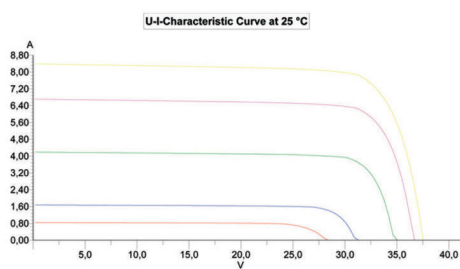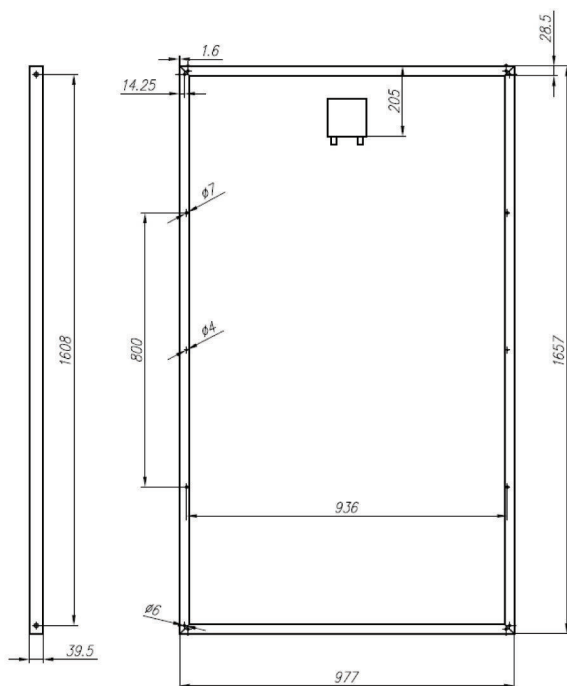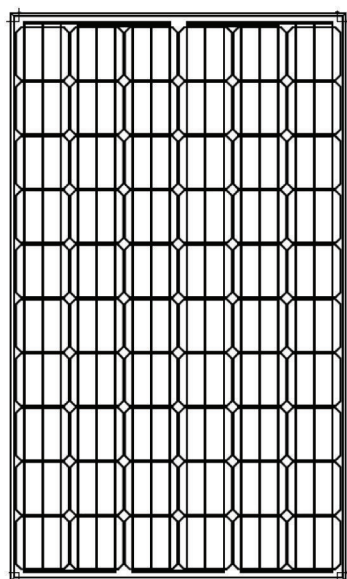

U-I-Characteristic Curve 100 W/m<sub>2</sub>    U-I-Characteristic Curve 200 W/m<sub>2</sub>  
 U-I-Characteristic Curve 500 W/m<sub>2</sub>    U-I-Characteristic Curve 800 W/m<sub>2</sub>  
 U-I-Characteristic Curve 1 000 W/m<sub>2</sub>

U-I-Characteristic Curve 0 °C    U-I-Characteristic Curve 25 °C  
 U-I-Characteristic Curve 50 °C    U-I-Characteristic Curve 75 °C

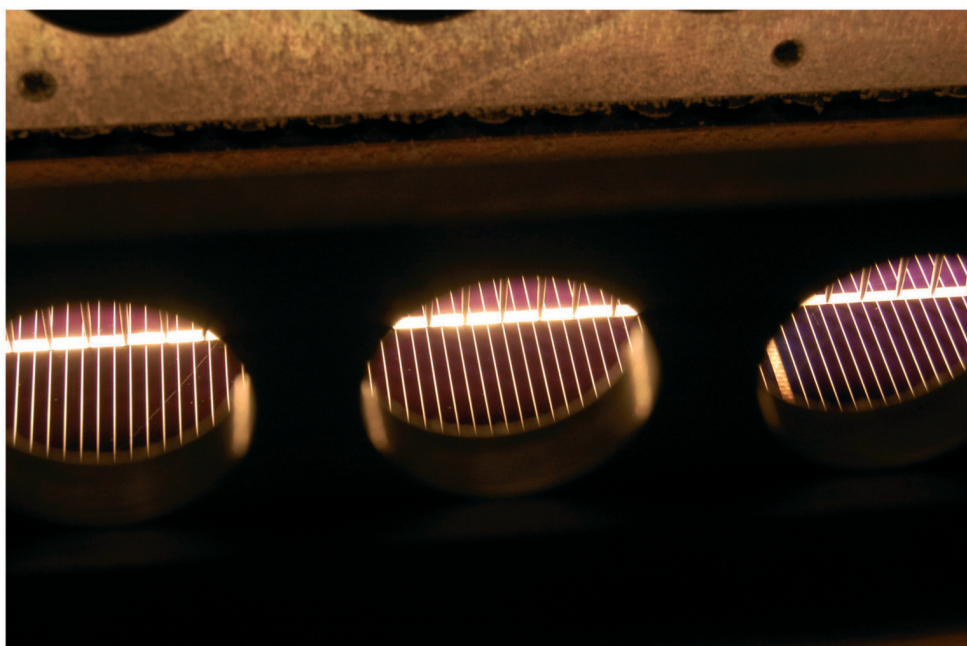

**KORAX**  
SOLAR