

245 - 265 Watt

Monocrystalline photovoltaic module (alu and black)

ZXM6-60 is one of the newest modules of ZNSHINE SOLAR. Versatile and adaptable, with a power output ranging from 245 Wp up to 265 Wp, it is perfect for residential rooftop systems as well as for ground-mounted installations.



High module conversion efficiency
16,19 %



Insured output warranty of 25 years



Green Certification: PV-Cycle, Carbon Footprint and RoHS



Without Potential-Induced Degradation (PID-free)



Resistant against ammonia and salt mist



Certified to withstand extreme snowloads of 5.400 Pascal

This module is made of reliable and carefully selected components. With a 25-year output warranty and a 10-year workmanship warranty, ZXM6-60 meets rigorous quality controls and international standard such as ISO 9001, ISO 14001 and OHSAS 18001. The panel is tested by widely acknowledged certifying institutions such as TÜV Süd. The recycling of this module at the product's end of life follows the prescriptions of PV-CYCLE Association certification.



25 years power output guarantee insured by PowerGuard

ZNSHINE SOLAR is one of the first manufacturers whose modules participate in the PowerGuard insurance programme, guaranteeing an output of 90% for 10 years and of 80% for 25 years even in the unlikely case of manufacturer's insolvency.




CARBON FOOTPRINT
Sustainability Services


The carbon emission of this solar module is 312 kg CO₂ equivalent. This result was calculated in 07.2012.
SGS Report No.: PCF SZ12122



Dimensions of the PV module

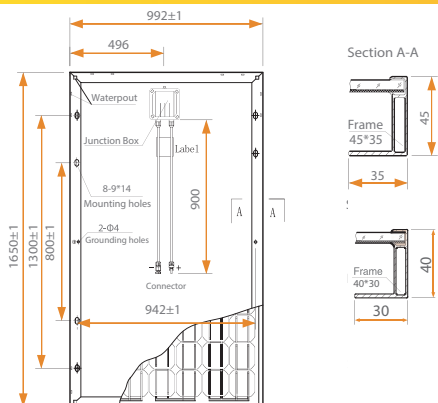

I-V Curves of the PV module

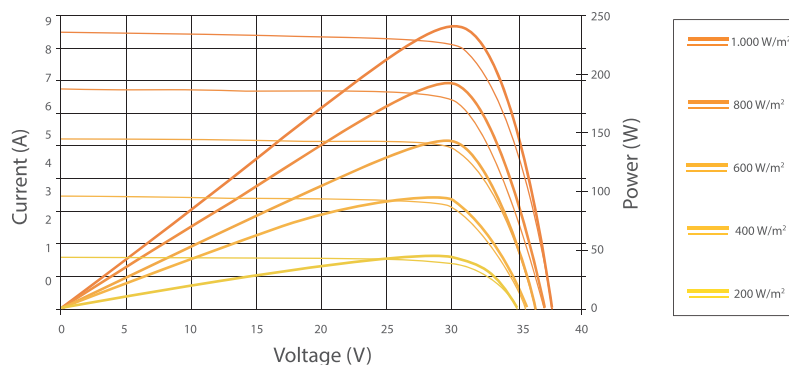

Electrical Data

	ZXM6 245	ZXM6 250	ZXM6 255	ZXM6 260	ZXM6 265
Nominal Power Watt P_{max} (W_p)	245	250	255	260	265
Power Output Tolerance P_{max} (%)	0 ~ +3	0 ~ +3	0 ~ +3	0 ~ +3	0 ~ +3
Maximum Power Voltage V_{max} (V)	30.40	30.50	30.60	30.80	31.00
Maximum Power Current I_{Mpp} (A)	8.07	8.20	8.33	8.46	8.55
Open Circuit Voltage V_{oc} (V)	38.10	38.20	38.30	38.60	38.90
Short Circuit Current I_{sc} (A)	8.59	8.71	8.85	8.91	8.93
Module Efficiency η_m (%)	14.97	15.27	15.58	15.88	16.19
Cell Efficiency η_c (%)	17.47	17.87	18.26	18.66	19.06

Mechanical Data

Solar Cells	Mono 156 × 156 mm
Cells Orientation	60 (6 × 10)
Module Dimensions	1650 × 992 × 40 mm / 50 mm
Weight	19.5 kg
Glass	High transparency, low Iron, tempered glass 3.2 mm
Frame	Anodized Aluminium alloy. Frame and backside in alu or black
Junction Box	IP 65
Cables/Connector	Ø 4 mm ² , 900 mm, MC4-compatible
Number of Diodes	6

Warranty Information

- 10 years workmanship warranty
- 10 years warranty at 90% power output
- + further 15 years warranty at 80% power output

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	45 °C (±2 °C)
Temperature Coefficient of P_{mpp}	-0.42 %/K
Temperature Coefficient of V_{oc}	-0.29 %/K
Temperature Coefficient of I_{sc}	0.04 %/K

Working Conditions

Maximum System Voltage	1000 V DC (TÜV)
Operating Temperature	from -40 to +85 °C
Maximum Series Fuse	15 A
Maximum Load (Snow/Wind)	5400 Pa / 2400 Pa
Ammonia-/Salt Mist Resistance	✓ IEC 62716, 61701

Packaging Information

Module per Box	28 pcs. (40 mm) 26 pcs. (45 mm)
Module per 40' HQ Container	784 pcs. (40 mm) 728 pcs. (45 mm)

¹ Measurement Tolerance STC: ± 3% (P_{max}), ± 10% (V_{max} , I_{Mpp} , V_{oc} , I_{sc}). Values at Standard Test Conditions STC (Air Mass AM 1.5, Irradiance 1000 W/m², Cell Temperature 25 °C)

Remark: Please read safety and installation instructions before using the product | Subject to change without prior notice © ZNSHINE SOLAR 2013 | Versionscode: ZXM6-60-1305.E

