


## MONOCRYSTALLINE MODULES

### D-SWM-260W/96M-SE

**260W Power**  
**top performance**

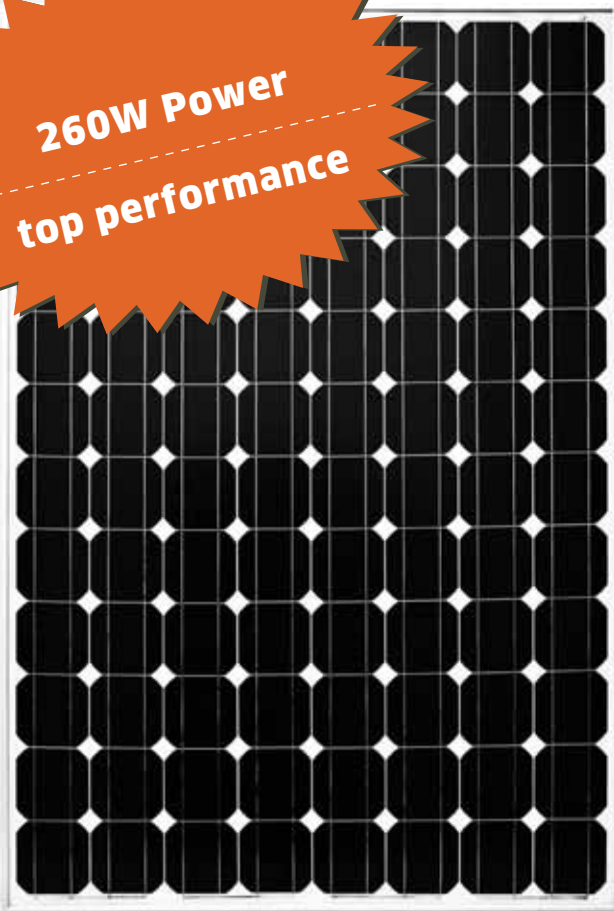

#### Product features

Guaranteed positive output tolerance of 0-3%

Junction box with 4 bypass diodes minimises decline in output when shadowing

3.2mm tempered glass for more stability and corrosion resistance

Backsheet lamination for long-term weather protection and anti-moisture

#### Warranty

Product warranty:  
12 years (material & manufacture)

Output guarantee:  
10 years on 90% of maximum output  
25 years on 80% of maximum output



ISO 9001:2000 Certificated Plant



**TECHNISCHES DATENBLATT**  
High Power Photovoltaic Module

**MONOCRYSTALLINE MODULES**  
D-SWM-260W/96M-SE



**Electrical Data**

Maximum Power (0-3%Wp)	260W
Maximum power voltage (Vmp)	49.7V
Maximum power current (Imp)	5.24A
Open circuit voltage (Voc)	60.4V
Short circuit current (Isc)	5.56A
Maximum system voltage (Vmax)	1000V
Cell Efficiency	17.5%
Module Efficiency	15.4%
Cell Configuration	96 in Series
NOCT	45°C±2°C
Temp. coefficient Power	-0.50%/°C
Temp. coefficient Isc	+0.043%/°C
Temp. coefficient Voc	-0.34%/°C

\*Measurement conditions under irradiance level of 1000W/m<sup>2</sup>, 1.5 Air Mass Spectrum, cell temperature of 25°C

**Mechanical Data**

Dimension of module	1590(L) x 1064(W) x 50(H) mm
Weight	21 kg
Frame structure (Material)	Aluminium
Front side	Glass
Front glass thickness	3.2 mm
Encapsulant	EVA
Back side	TPT
Junction Box	IP65
Cable	900 mm (Ø 4mm <sup>2</sup> )
Max. Series Fuses	8A


**Absolute Maximum Ratings**

Operating Temperature	-40°C to +85°C
Maximum Hail diameter	up to 25mm Ø
Continuous wind pessure	up to 130 Km/h


**Packing Configurations**

Packing configuratin	20 pcs. / box
Quantity/pallet	1 box / pallet
HQ Container	560 pcs. / container

**Characteristic Curves**

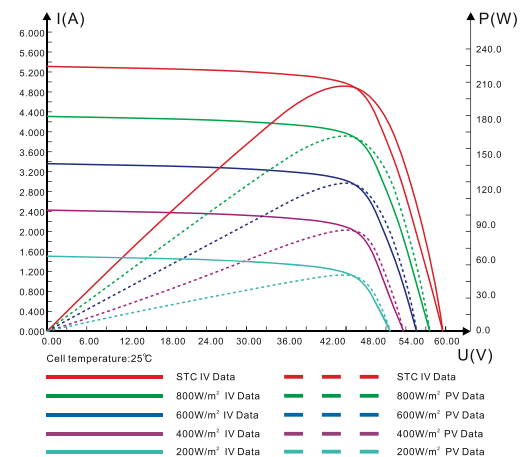

**Dimensions**

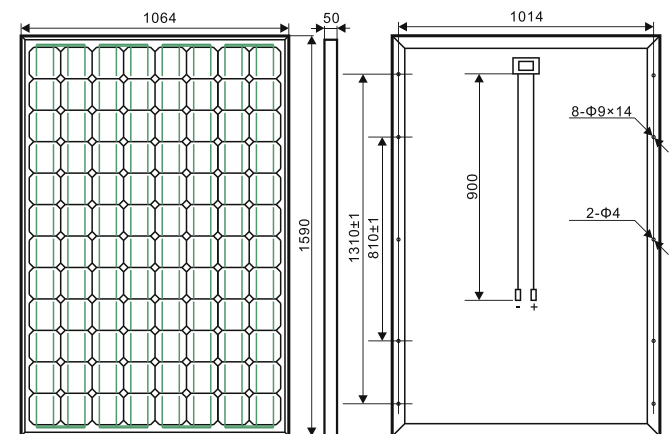

Indemnity against liability: Given technical data are averages and could vary slightly. The directly related data of the special measuring - flashreport are decisive. Subject to changes, errors and omissions excepted. Technical changes within the further development are to be reserved by the manufacturer and producer. Images can differ from actual/original product.

Data as: January 2012



Gleimstraße 50 | 10437 Berlin, Germany  
T +49 (0)30 63 22 29-60 | F +49 (0)30 63 22 29-59  
info@deng-sunwin-solar.de | www.deng-sunwin-solar.de