

ASUN280-M



280W Monocrystalline Photovoltaic Module

FULL
QMS

Quality Management System

- ✓ Raw material and module traceability
- ✓ Control of raw material
- ✓ Products manufacturing control
- ✓ Finished products inspection



- ✓ 100% finished modules flashed
- ✓ Flash report provided to customer
- ✓ 100% electroluminescence test




- ✓ 10-year material warranty
- ✓ Power output warranty:
 - 95% of the power on 5 years
 - 90% of the power on 12 years
 - 85% of the power on 18 years
 - 80% of the power on 25 years



- ✓ Error and Omission Insurance (Chubb Group): cover the economic loss sustained due to operational defects or performance failures

144W/m²

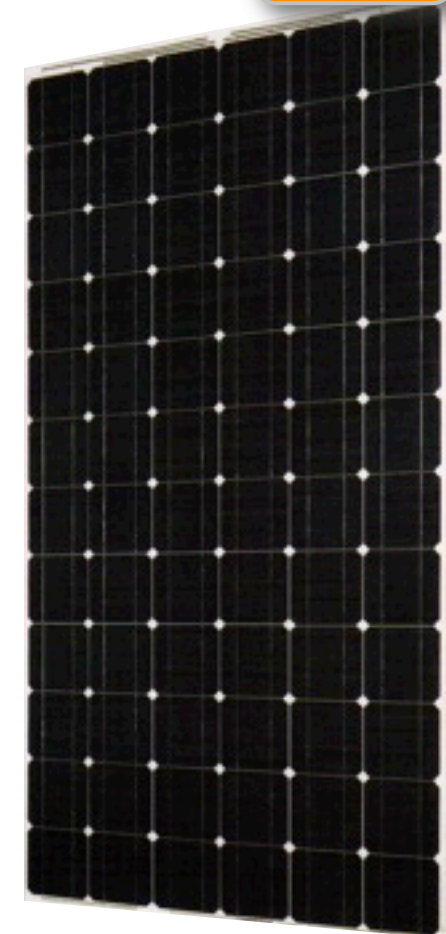

Clean Energy Council



Factory certified

Certification
IEC61215 & IEC61730

Technical

Electrical Data

Maximum Power (Pmax)	280W
Tolerance	+/- 2%
Maximum Power Voltage (Vpm)	35.15V
Maximum Power Current (Ipm)	7.97A
Open Circuit Voltage (Voc)	43.23V
Short Circuit Current (Isc)	8.60A
Cell efficiency	16.78%
Module efficiency	14.4%
Maximum System Voltage	1000V

STC: irradiation 1000W/m2, AM 1,5 and temperature 25°C


Performance at 800W/m2

Maximum Power Voltage (Vpm)	35.04V
Maximum Power Current (Ipm)	6.36A

NOCT, 800W/m2, AM 1,5 and 25°C


Temperature Coefficient

NOCT	45°C +/-2%
Voltage Temperature (Voc)	-0.37%/°C
Current Temperature (Isc)	+0.031%/°C
Power Temperature (Pm)	- 0.53%/°C

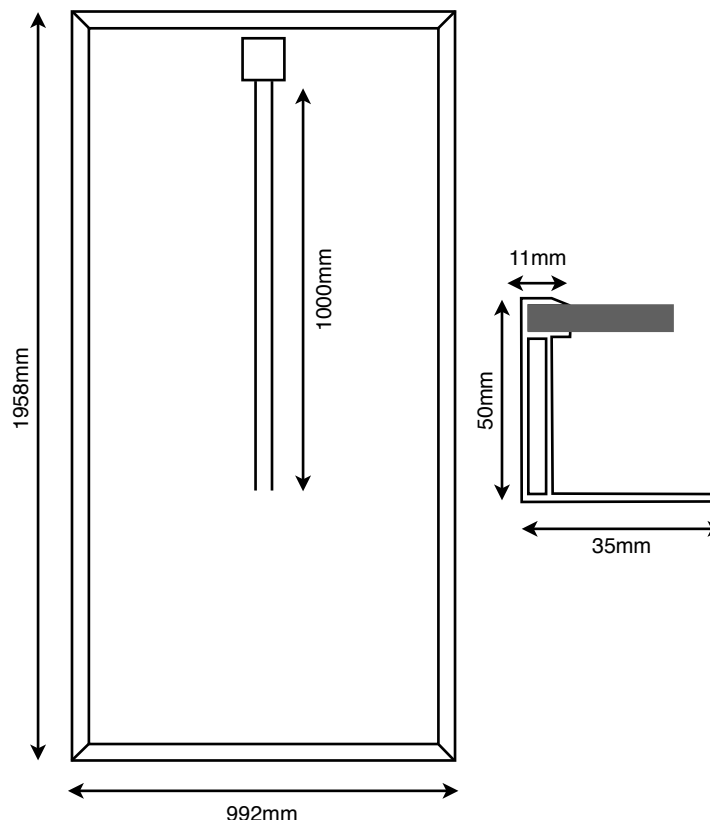

Mechanical Data

Number of Cells	72 (6 x 12)
Cell Dimension	156*156mm
Bypass diodes	6
Glass Thickness	3.2mm
Maximum Load	5400Pa
Weight	23.2Kg
Dimensions	1958*992*50mm
Cable length / section	1000mm / 4mm ²
Connectors	MC4 compatible
Operating Temperature	-40°C to +85°C




Frame

Built-in aluminium angle makes the frame stronger and reliable on long-term. Angle is set inside the frame cavity.



Back sheet

- Improved aesthetic appearance
- Anti-UV and Anti-Yellowing
- Ultimate moisture barrier
- Proven durability



Junction box

- IP65
- Fire resistance
- Excellent electrical insulation of components
- Stability and flexibility over a wide temperature range