



HQ240M Series—230W,235W,240W,245W,250W

MONOCRYSTALLINE SOLAR MODULE

High-quality and high-efficiency



Features



High module conversion efficiency

Module efficiency up to 16.1% achieved through advanced cell technology and manufacturing capabilities



Self-cleaning & anti-reflective

Higher module efficiency from anti-reflective, hydrophobic layer with higher light absorption and minimal surface dust



Positive tolerance

Guaranteed positive tolerance of 5% delivers higher outputs reliably



Excellent weak light performance

Excellent performance under low light conditions



Extended wind and snow load tests


Module certified to withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal) *




HQsolar current sorting process

System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage

Industry-leading Warranty based on Pnom



- Based on nominal power (Pnom)
- 25-year transferrable power output warranty: 5 years/95%, 12 years/90%, 18 years/85%, 25 years/80% ***
- Warrants 6.7% more than the market standard over 25 years
- 10-year material and workmanship warranty



Superior Frame Design

Specially designed drainage holes and rigid construction prevent frames from deforming. Screwless frame design for a long term durability.

HQ Solar Co., Ltd.

No.2 Yingbin Avenue, The National Economic Development Zone, Dongtai City, Jiangsu Province, China

Tel: +86 0515-68831993

Fax: +86 0515-68831968,

E-mail: sales@hq-solar.com.cn

Web: www.hq-solar.com.cn


HQ Solar Co., Ltd. is a manufacture of high quality mono- and poly- crystalline silicon PV modules in East China; with an annual capacity of 300MW. Our 160 research staff and workers dedicate themselves to providing inexhaustible and renewable energy.

HQ SOLAR


IEC61215, IEC61730, TUV Safety Class II, CE

HQ240M Series—230W,235W,240W,245W,250W

Module Dimensions

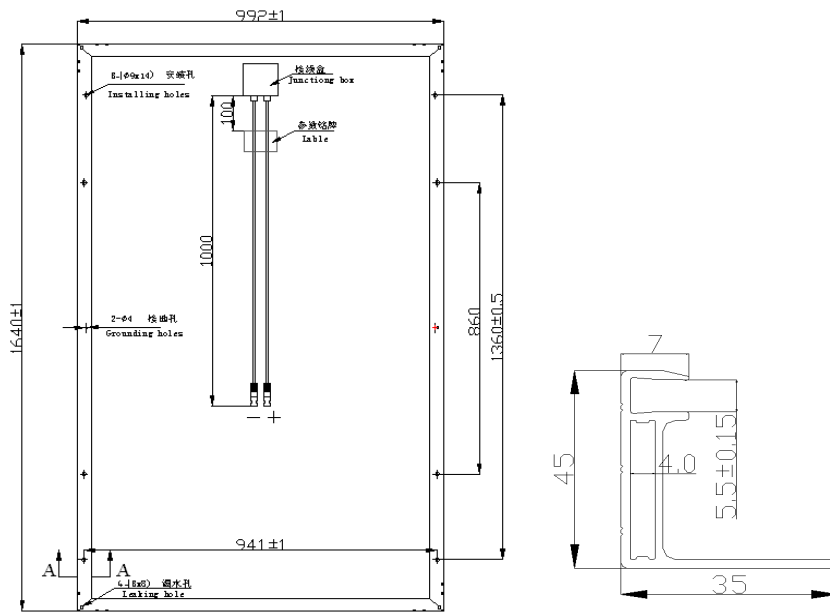

IV Curve at Different Irradiance Levels

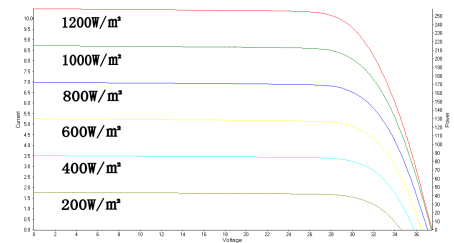

Certification



ELECTRICAL CHARACTERISTICS

The rated power may only vary by -0/+4.99Wp and all other electrical parameters by ±5%

Power Classification	P _{max} (w)	HQ240M-230W	HQ240M-235W	HQ240M-240W	HQ240M-245W	HQ240M-250W
Voltage at Max. Power Point	V _{mp} (V)	29.7	30	30.3	30.4	30.6
Current at Max. Power Point	I _{mp} (A)	7.75	7.84	7.93	8.06	8.18
Open Circuit Voltage	V _{oc} (V)	36.5	36.9	37.38	37.5	37.6
Short Circuit Current	I _{sc} (A)	8.58	8.64	8.73	8.83	8.89

The electrical data apply to standard test conditions(STC): Irradiance of 1000W/m² with AM 1.5 spectra at 25 °C

DIMENSIONS AND WEIGHT

Cells/ Module	60(6×10)
Module Dimensions	1640×992mm
Module Thickness(Depth)	45 mm
Approximate Weight	19.6 kg

CHARACTERISITIC DATA

Type of Solar Cell	High-efficiency mono crystalline solar cells of 156*156mm
Frame	Silver anodized aluminum alloy
Glass	Tempered(low-iron), 3.2 mm (0.13in)
Junction Box	IP65 rated; 3 internal bypass diodes
Cable & Connections	Length: 1000mm ;4 mm ² cables; TUV & UL approved

TEMPERATURE COEFFICIENTS

Voltage	β, Voc(%/K)	-0.346
Current	α, I _{sc} (%/K)	+0.036
Power	γ, P _{max} (%/K)	-0.47
NOCT Avg	(+/-2°C)	45

LIMITS

Max System Voltage	1000 VDC for IEC(600 VDC for UL)
Operating Module Temperature	-40°C to +85°C
Storm Resistance/ Static Load	Tested to IEC 61215 for loads up to 5400 Pa; hail and wind resistant

Caution: following user manual and safety operate guide before installation
2012.7 HQ Solar Co., Ltd. Has explanation rights,will be extend if anything
changed of this specification

HQSOLAR
www.hqsolar.com.cn