




BW-SM150-155M54


Monocrystalline Solar Module

KEY FEATURES

- Entire module certified to withstand high wind loads (2400 Pascal) and snow loads (5400 Pascal)
- Perfect module self-cleaning capability, reduce power loss caused by dust (soiling effect)
- More elegant cell and module appearance
- Excellent performance in low-light irradiance environment
- High salt mist and ammonia resistance

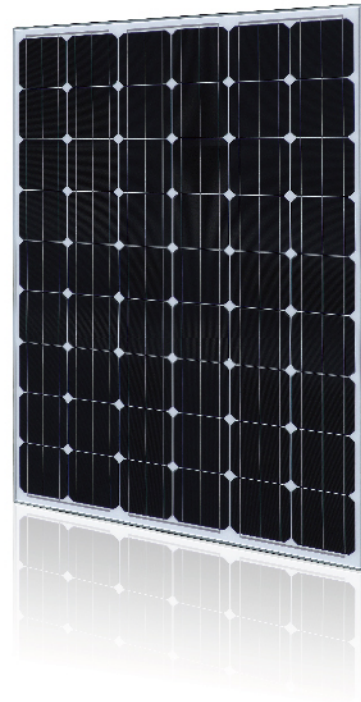

Premium Performance Warranty

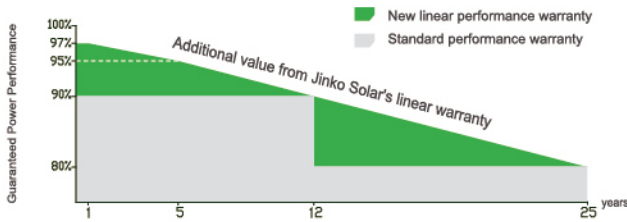

* Based on customer requirements and contract terms




ISO 9001:2008
ISO 14001:2004
OHSAS 18001:2007




IEC 61215:2005
EN 61730-1:2007
EN 61730-2:2007



Dimensions

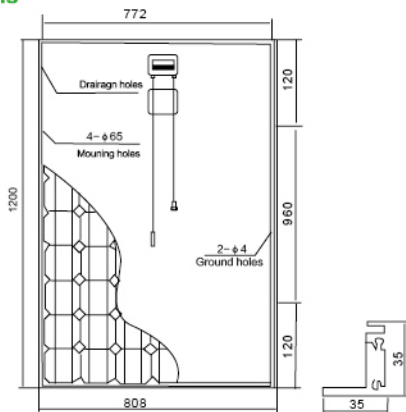

I-V Curves

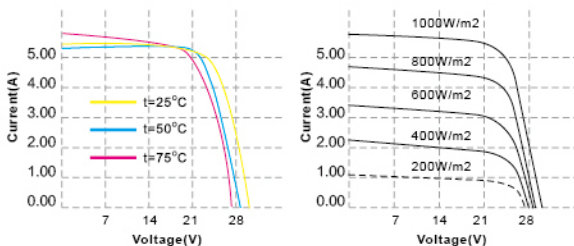

General Data

Cell	Monocrystalline 125mmx125mm
No. of cells	54 in series (6x9)
Weight	9.8kg
Dimensions	1200x808x35 (mm)
Produced in accordance with	TUV/IEC 61215/EN 61730

Electrical Data

(STC: Irradiance 1000w/m², module temperature 25OC, AM=1.5)

Power	150Wp	155Wp
Open circuit voltage	32.4V	32.4V
Maximum power voltage	27V	27V
Short circuit current	6.11A	6.31A
Maximum power current	5.55A	5.74A
Module Conversion Efficiency	15.43%	15.94%
Maximum system voltage	1000V	
Operating temperature	-40OC to +90OC	
NOCT	45OC ± 2OC	
Temperature coefficient of Isc	+0.05%/OC	
Temperature coefficient of Voc	-0.34%/OC	
Temperature coefficient of Pm	-0.5%/OC	

Specifications included in this datasheet are subject to change without prior notice.