



Play it safe



**Next  
Generation**

Premium Modules  
MADE IN GERMANY

## Premium XM poly

200 W • 205 W • 210 W

- Plus-sorted
- Improved innoframe stability
- 12-year product warranty  
25-year linear performance warranty
- Guaranteed high yields for decades



# Premium XM poly

## Electrical data under STC (Standard Test Conditions: 1000 W/m<sup>2</sup>, 25 °C, AM 1.5)

Rated power	$P_{max}$	200 W	205 W	210 W
Sorting limits of performance		0/+5 W	0/+5 W	0/+5 W
Voltage	$U_{MPP}$	24.00 V	24.20 V	24.40 V
Open circuit voltage	$U_{OC}$	30.00 V	30.14 V	30.31 V
Current	$I_{MPP}$	8.35 A	8.48 A	8.62 A
Short-circuit current	$I_{SC}$	8.86 A	8.94 A	9.02 A
Efficiency		14.9 %	15.2 %	15.6 %

## Electrical data at 800 W/m<sup>2</sup>, NOCT (45°C +/- 2K), AM 1.5

Power in MPP	$P_{max}$	151 W	155 W	159 W
Voltage	$U_{MPP}$	22.42 V	22.47 V	22.50 V
Open circuit voltage	$U_{OC}$	27.67 V	27.71 V	27.74 V
Current	$I_{MPP}$	6.74 A	6.90 A	7.06 A
Short-circuit current	$I_{SC}$	7.10 A	7.22 A	7.34 A

The efficiency decreases by approximately 3% compared to the efficiency under STC at an irradiation of 200 W/m<sup>2</sup> and 25 °C.

## Temperature data

Power temperature coefficient	$T_K(P_{MPP})$	-0.43 %/K
Voltage temperature coefficient	$T_K(U_{OC})$	-0.32 %/K
Current temperature coefficient	$T_K(I_{SC})$	0.04 %/K

## Further information

Number of cells	48
Max. system voltage	1000 V
Reverse current loading capability	17 A
Front cover	Special hardened low-iron glass with anti-reflex coating; Glare reduced to a minimum
Module connection	Junction box 3 bypass diodes IP 67 no potting, 2 x approx. 1 m, solar cable Ø 4 mm <sup>2</sup> , plug connector PV4 IP 68
Snow load*	innoframe framed: 5400 Pa $\hat{=}$ 550 kg/m <sup>2</sup>

12-year product warranty, 25-year linear performance warranty according to our additional warranty conditions for solar power modules of the "Premium" product series, which we will gladly send you

Subject to technical modifications with corresponding follow-up certifications. Errors excepted.

\*Load tested according to EN IEC 61215 (ed. 2) In compliance with the installation and operating manual.

## Certifications

EN IEC 61215 (ed. 2)<sup>1</sup>

EN IEC 61730-1, -2<sup>1</sup>


EN 13501-01, class E

Protection class II

Directive 2006/95/EG (CE)


Hail protection class 3

<sup>1</sup>Subject to follow-up certifications.

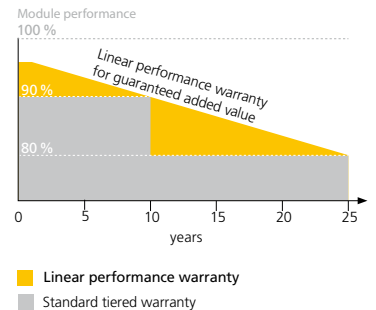

### Premium XM poly

Weight:  
approx. ca. 15 kg

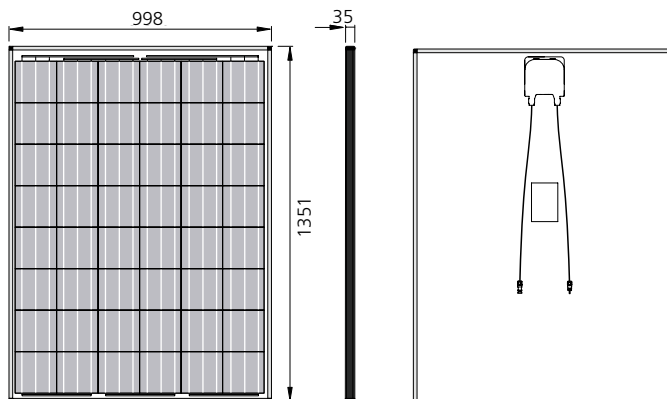

**Note:**  
Ensure correct polarity!

Your specialist dealer:

**Solar-Fabrik AG**  
Munzinger Str. 10  
79111 Freiburg  
Germany  
Phone +49 (0)761 4000-0  
Fax +49 (0)761 4000-199  
info@solar-fabrik.de  
[www.solar-fabrik.de](http://www.solar-fabrik.de)