

energetica Photovoltaic Module

E-2000

laminat



10 years
Product warranty



- ▶ **Performance through matching module components**
High-quality, high-performance materials from European manufacturers lead to lasting high module performance.
- ▶ **The energetica Power Glass Concept**
Outstanding performance in weak light or oblique light conditions thanks to the energetica Power Glass Concept with nanostructured surface.
- ▶ **Aesthetics as part of the product**
The homogeneous color of the cells and covered string connections produce an elegant appearance.
- ▶ **Presorted delivery as assembly preparation**
The pre-sorting of energetica modules reduces preparation time for installations on site.
- ▶ **Delivery with purely positive output tolerance**
Within a performance category, E-2000 modules are delivered with an output tolerance of 0 to +4.99 Wp.
- ▶ **Safety through comprehensive warranty**
10 years product warranty and the performance warranty of 25 years on 80 %, 10 years on 90 % of the nominal performance ensure long-term returns.

energetica

PURE AUSTRIA. PURE ENERGY.

www.energetica-pv.com

energetica Photovoltaic Module

E-2000

laminat

Electrical Data

Type	E-2000L 235	E-2000L 240	E-2000L 245	E-2000L 250
Nominal performance MPP $\textcircled{1}$ P_{MPP} (P_{Max})	235 Wp	240 Wp	245 Wp	250 Wp
Open circuit voltage U_{OC}	37,14 V	37,16 V	37,43 V	37,57 V
Voltage MPP $\textcircled{1}$ U_{MPP}	29,81 V	29,83 V	29,86 V	29,99 V
Current MPP $\textcircled{1}$ I_{MPP}	7,93 A	8,15 A	8,31 A	8,46 A
Short-circuit current I_{SC}	8,38 A	8,47 A	8,90 A	8,91 A
Cell efficiency η_{cell}	16,80 %	17,20 %	17,60 %	17,80 %
Module efficiency η_{module}	14,65 %	14,96 %	15,28 %	15,59 %
Performance tolerance	+/-3 %	+/-3 %	+/-3 %	+/-3 %

This measurements are valid on standard test conditions STC. All electrical data ± 10 % (airmass AM 1,5; radiation of 1000W/m²; cell temperature 25°C).

$\textcircled{1}$ MPP= Maximum Power Point

Temperature coefficient (Tc)

Tc short circuit current α	+0,06 %/ °C
Tc open circuit voltage β	-0,33 %/ °C
Tc maximum power γ	-0,46 %/ °C
NOCT $\textcircled{2}$	42 \pm 2 °C

$\textcircled{2}$ Irradiation 800W/m², ambient air temperature 20°, wind speed 1m/s


Mechanical Data

Cells	60 polycrystalline cells 156 x 156 mm
Dimensions HxWxD	16212 x 982 x 5,5 mm
Weight	18 kg
Bypass diodes	3
Module connection	solar cable 4 mm ² , \approx 1 m length, provided with MC 4 plugs

Permissible operating conditions

Temperature range	-40°C to +85°C
Maximum system voltage	1.050 V
Nominal load I_{max}	tested according to IEC up to 5.400 Pa
Breaking load	>6.000 Pa
Hail resistance	up to 25 mm \varnothing hailstone at 165,6 km/h v_{impact} up to 55 mm \varnothing hailstone at 122,6 km/h v_{impact}
Reverse current strength	30 A
Fuse Rating	20 A
Packing unit	40 modules/pallet

your specialist partner:

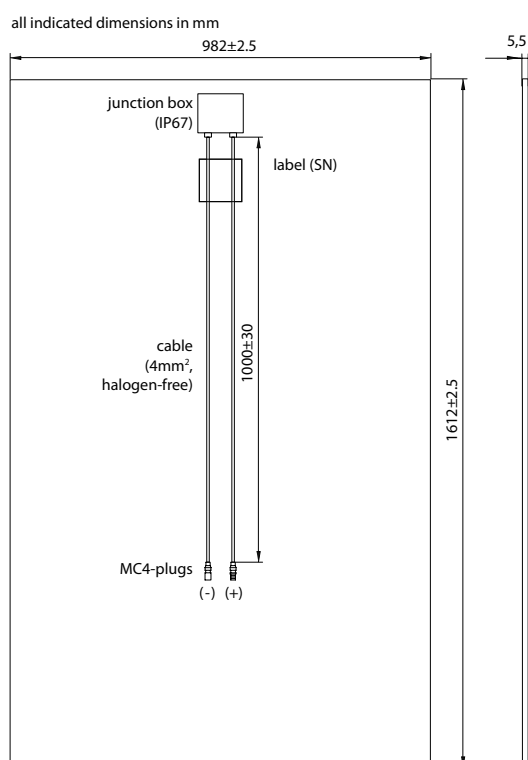

energetica is certified according to the valid standards ISO 9001, ISO 14001 and BS OHSAS 18001.

energetica photovoltaic modules are certified according to the applicable European and international requirements of IEC 61215:2005 ed. 2.0, IEC 61730 and meet the requirements of protection class II. energetica is a cooperation partner of ÖVE.

E2000L_1.0_19_04_2013

energetica Energietechnik GmbH
Adi-Dassler-Gasse 6 · 9073 Klagenfurt-Viktring · Austria
Telefon +43 (0)463 22 500-0 · Fax +43 (0)463 22 500-22
office@energetica-pv.com · www.energetica-pv.com

energetica reserves the right to make production-related changes to this datasheet. The provided data is subject to change. Photovoltaic modules are electrical equipment. For proper installation and commissioning please contact your installer.

energetica
PURE AUSTRIA. PURE ENERGY.
www.energetica-pv.com