



CNBM Solar Monocrystalline Series VI

Characteristics

Max Power Voltage Vmp(V)	17.4V	17.7V	18.0V	18.2V
Max Power Current Imp(A)	5.75A	6.21A	6.67A	7.14A
Open Circuit Voltage Voc (V)	22.0V	22.2V	22.6V	22.8V
Short Circuit Current Isc(A)	6.29A	6.69A	7.08A	7.60A
Max Power Pm(W)	100W	110W	120W	130W

Mechanical Data

Dimension	1060 x820 x30 mm
Weight	11.0 kg
Tolerance	±3w
No. of Cells	144PCS

The dimension of the modules can be changed according to the demand of clients



Limits

Operating Temperature	-40 °C to +85°C
Storage Temperature	-40 °C to +85°C
Max System Voltage	700V

Guarantees

Products Guarantee	2 yrs free from defects in materials and workmanship
Performance Guarantee	No less than 90% within 10yrs and no less than 80% within 20yrs
Certificates	TUV (IEC61215&IEC61730), CE

Picture

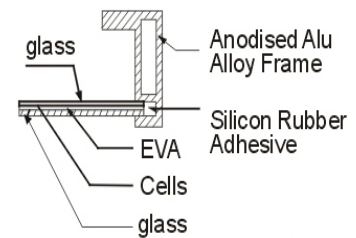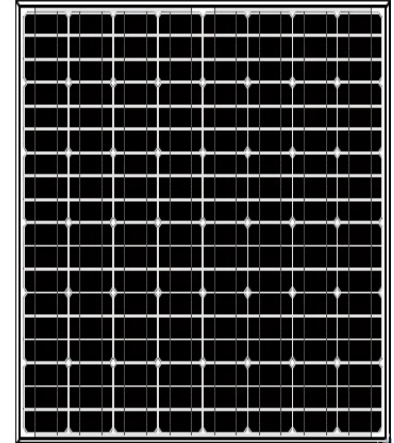

unit: mm [inch]



* The data does not refer to a single module and it is not part of the offer, it is only for comparison only to different module types.

For more information of CNBM Solar products, please visit www.cnbm-solar.com



CNBM International Corporation