



CNBM Solar Polycrystalline Series V

Characteristics

Max Power Voltage Vmp(V)	17.6V	18.0V	17.4V	17.8V
Max Power Current Imp(A)	5.11A	5.28A	5.75A	6.18A
Open Circuit Voltage Voc (V)	22.2V	22.6V	22.0V	22.4V
Short Circuit Current Isc(A)	5.48A	5.53A	6.31A	6.54A
Max Power Pm(W)	90W	95W	100W	110W

Mechanical Data

Dimension	1020x670x30mm	/	1190x670x30mm
Weight	8.5kg	/	9.5kg
Tolerance	±3w		
No. of Cells	36/72PCS		

The dimension of the modules can be changed according to the demand of clients


Limits

Operating Temperature	-40 °C to +85°C
Storage Temperature	-40 °C to +85°C
Max System Voltage	700V

Guarantees

Products Guarantee	2 yrs free from defects in materials and workmanship
Performance Guarantee	No less than 90% within 10yrs and no less than 80% within 20yrs
Certificates	TUV (IEC61215&IEC61730), CE

Picture

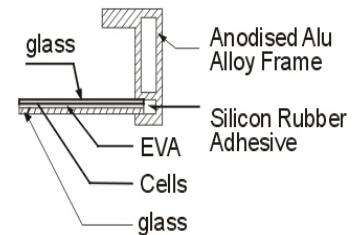

unit: mm [inch]



* The data does not refer to a single module and it is not part of the offer. It is only for comparison only to different module types.



CNBM International Corporation

For more information of
CNBM Solar products,
please visit
www.cnbmsolar.com