



CNBM Solar Polycrystalline Series VI

Characteristics

Max Power Voltage Vmp(V)	17.2V	17.5V	17.8V
Max Power Current Imp(A)	6.98A	7.42A	7.86A
Open Circuit Voltage Voc (V)	21.8V	22.0V	22.4V
Short Circuit Current Isc(A)	7.76A	8.10A	8.34A
Max Power Pm(W)	120W	130W	140W

Mechanical Data

Dimension	1470x670x30mm
Weight	12kg
Tolerance	±3w
No. of Cells	36PCS

The dimension of the modules can be changed according to the demand of clients



Limits

Operating Temperature	-40 °C to +85°C
Storage Temperature	-40 °C to +85°C
Max System Voltage	700V

Guarantees

Products Guarantee	2 yrs free from defects in materials and workmanship
Performance Guarantee	No less than 90% within 10yrs and no less than 80% within 20yrs
Certificates	TUV (IEC61215&IEC61730), CE

Picture

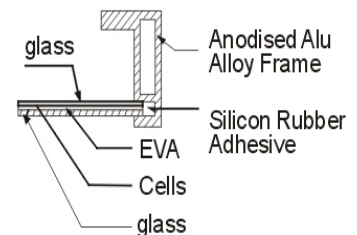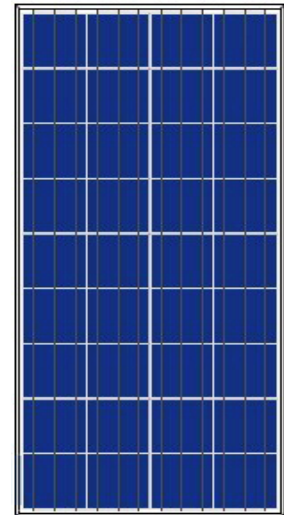

unit: mm [inch]



* The data does not refer to a single module and it is not part of the offer, It is only for comparison only to different module types.



CNBM International Corporation

Address: Floor 17-18th, No.4 Building, Zhuyu International Commercial Center,
No.9 Shouti South Road, Haidian District, Beijing 100048, China.

Website: www.cnbmsolar.com

E-mail: sales@cnbmsolar.com

For more information of
CNBM Solar products,
please visit
www.cnbmsolar.com