

*"Generate cheap, green  
electricity from sunlight"*

# iP150P

## 150W POLYCRYSTALLINE SOLAR PANEL



INOVIA designs, manufactures, installs and maintains high performance photovoltaic products that convert sunlight into electricity for residential, commercial, and utility-scale power generation.



iP150P is a triple PID-resist polycrystalline solar panel that provides high power output more than 150W with embedded anti-reflective and anti-soiling surface. It can provide outstanding performance in low-light irradiance environment.

- Highly reliable due to stringent quality control
  - Over 30 hours in-house tests (UV, TC, HF, and many more)
  - In-house testing goes well beyond certification requirements
- High power output of more than 150W and module efficiency up to 15.7%
- Module can bear snow loads up to 5400Pa and wind loads up to 2400Pa
- High performance under low light conditions cloudy days, mornings and evenings
- Approved original MC4 Photovoltaic connector used with highest reliability
- Embedded RFID tag for more flexible management and maintenance.
- Manufactured according to International Quality and Environment Management System Standards ISO9001:2008, ISO14001:2004
- Positive power tolerance 0~+5w
- TÜV NORD certified panel for high salt and ammonia resistance.

### Certification

UL 1703  
UL 790 Class A fire rating  
ASTM D3161 Class F  
IEC 61215  
California CEC Listed  
CE  
prEN15601  
BS 476-3: 2004, AA rating


### Warranty

5 year product warranty  
25 year linear power output warranty  
80% output power after 25 year

Email: [sales@ino-via.com](mailto:sales@ino-via.com)  
Tel: (+86) 755.3667.7330  
Fax: (+86) 755.2161.8603  
[www.ino-via.com](http://www.ino-via.com)  
Address: N2076 Yueliangwang Road, Nanshan District, Shenzhen City, Guangdong Province, 518054, China.



# INOVIA

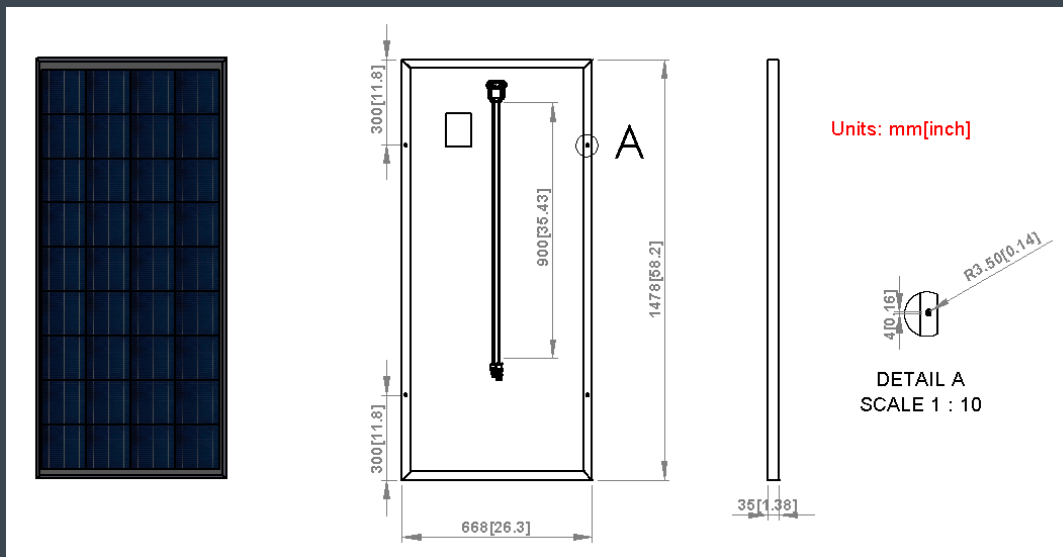

### MECHANICAL CHARACTERISTICS

<b>Outside Dimensions</b>	1478x668x35mm / 58.2x26.3x1.4inch
<b>Weight</b>	17 Kg / 37.5 lbs (approx)
<b>Cell Type</b>	Polycrystalline
<b>Cell Size</b>	156x156mm / 6.14x6.14inch
<b>Number Of Cells</b>	36 in series
<b>Cell Manufacturer</b>	SunPower, Sharp, BOSCH, 4BB
<b>Front</b>	3.2mm (0.13inch) tempered glass (EN 12150)
<b>Bypass Diode</b>	2 Per panel
<b>Junction Box</b>	IP65
<b>Connectors</b>	MC4-EVO 3
<b>Cables</b>	4mm <sup>2</sup> /12 AWG Class II double insulated
<b>Cable Length</b>	900mm – 35.43inch
<b>Load Rating</b>	19.7 kg/m <sup>2</sup> - 43.45 lbs/m <sup>2</sup>
<b>Front Load (Snow + Wind)</b>	5400 Pa
<b>Back Load (Wind)</b>	2400 Pa
<b>Frame Material</b>	Clear anodized aluminum
<b>Operating Temperature</b>	-40 to +90°C
<b>Application Class</b>	Class A
<b>Packaging</b>	26 Per Pallet

### ELECTRICAL CHARACTERISTICS

Standard Test Conditions: 25°C, 1kW/m<sup>2</sup>, AM 1.5

<b>Maximum Power (Pmax)</b>	150W
<b>Maximum Power Voltage (Vmp)</b>	18.3V
<b>Maximum Power Current (Imp)</b>	8.20A
<b>Open Circuit Voltage (Voc)</b>	22.6V
<b>Short Circuit Current (Isc)</b>	8.81A
<b>Maximum System Voltage</b>	1000 VDC (IEC)
<b>Series Fuse Rating</b>	15 A
<b>Performance Tolerance</b>	± 3%
<b>Cell efficiency</b>	17.7%
<b>Module Efficiency</b>	15.7%
<b>Power Temp. Coefficient (Ptmp)</b>	-0.44%/°C
<b>Voltage Temp. Coefficient (Vtvc)</b>	-0.33%/°C
<b>Normal Operating Cell Temp. (NOCT)</b>	45±2°C
<b>Power Tolerance</b>	-0~+5w

The information provided in this flyer contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. All product designations may be trademarks or product names of INOVIA Limited or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.

Email: [sales@ino-via.com](mailto:sales@ino-via.com)  
 Tel: (+86) 755.3667.7330  
 Fax: (+86) 755.2161.8603  
[www.ino-via.com](http://www.ino-via.com)

Address: N2076 Yueliangwang Road, Nanshan District, Shenzhen City, Guangdong Province, 518054, China.

