


105-115 Watt

POLY CRYSTALLINE MODULE 72x(156mmx66mm)



www.risenenergy.com
THE POWER OF RISING VALUE



Electrical Characteristics

Model	Pm(Wp)	Tolerance	Vm(V)	Im(A)	Voc(V)	Isc(A)
SYP105S	105W	+ -3%	33.9	3.10	42.4	3.45
SYP110S	110W	+ -3%	34.5	3.19	43.1	3.55
SYP115S	115W	+ -3%	35.0	3.29	43.7	3.66

Valued at STC (AM 1.5, 1000W/m², 25°C)

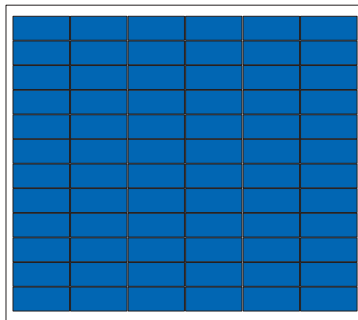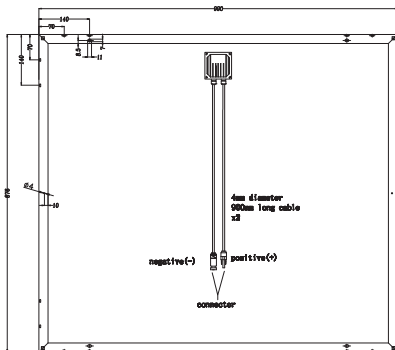

Specifications

- Number of poly crystalline solar cell 72pcsx(156mmX66mm)
- Aluminum frame, dimension 990x876x25mm
- Weight 9.7kg
- Temperature coefficient of VOC(β) = -0.39%/°C
- Temperature coefficient of ISC(α) = +0.033%/°C
- Temperature coefficient of Pmax = -0.44%/°C
- Bypass diodes to reduce loss in partial shadow
- IP65
- CE Standard
- Performance test data for each module