



XS72+ SERIES PHOTOVOLTAIC MODULES


PEAK POWER: 345-360 Wp

FEATURES INCLUDE:

- 72 MOTTECH monocrystalline solar cells connected in series
- Positive power tolerance of 0~3% improves system performance
- Industry-leading module efficiency: maximum efficiency of 18.5%
- Tested up to 5400Pa for maximum load resistance
- Verified resistance against PID effects
- Progressive Power Warranty guarantees 80.2% of rated power at 25 years
- Manufactured globally with world-class quality standards


QUALITY, RELIABILITY, AND KWH YIELD

MOTTECH modules are powered by industry acknowledged high performance, reliable MOTTECH silicon cells. 20 years of experience in solar module engineering and design, along with rigorous durability and performance tests, ensure reliable lifetime performance and maximum kWh yield.



25-YEAR PROGRESSIVE WARRANTY*

- 25-year progressive power warranty
- 10-year warranty on materials and workmanship

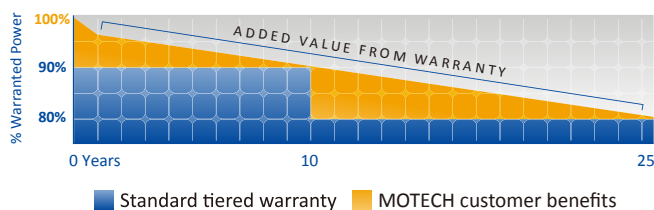


CERTIFICATIONS & STANDARDS*




Application Class A
Safety Class II

* Please refer to our website at www.mottechsolar.com for certification and warranty details

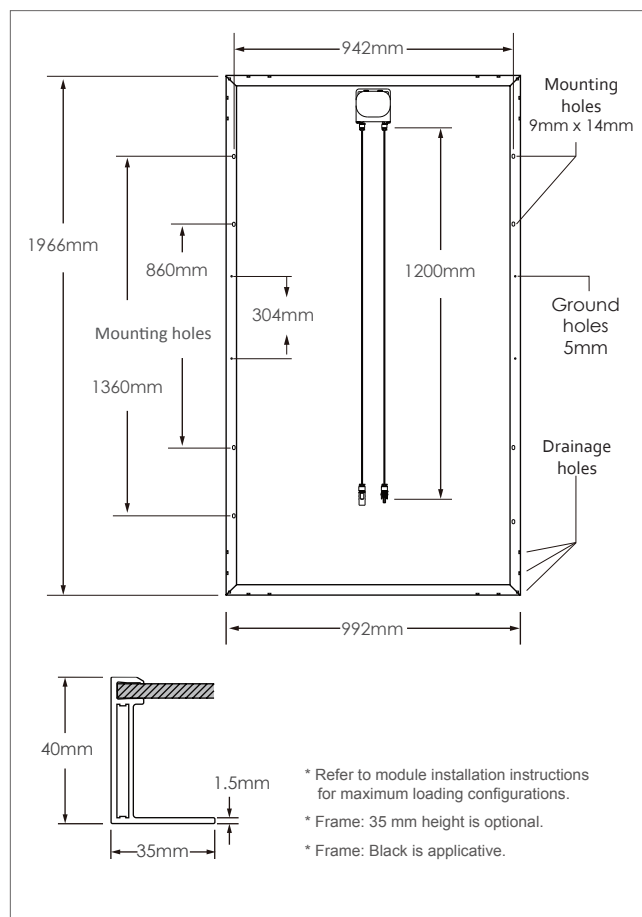PHYSICAL CHARACTERISTICS

PHYSICAL DESIGN PROPERTIES

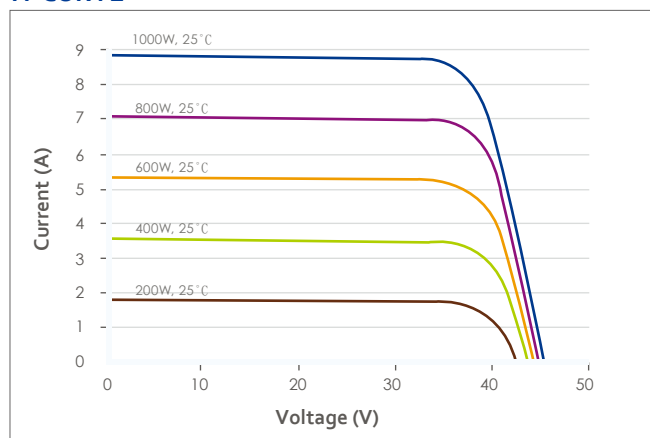Dimension	1966×992×40 mm
Weight	26.7 kg±5%
Glass	3.2mm low iron tempered glass with anti-reflective coating
Junction Box	IP67 with 3 bypass diodes
Output Cables	Φ4.0mm ² , 1000mm
Connectors	MC4 Compatible
Packing	26 pcs/ pallet, 572 pcs/ container (HQ)

IV CURVE

ELECTRICAL PERFORMANCE
XS72C4-345
XS72C4-350
XS72C4-355
XS72C4-360

Electrical Performance @ STC					
Maximum Power P _{max} [Wp]		345	350	355	360
Max. Power Voltage V _{mpp} (V)		38.16	38.41	38.67	38.92
Max. Power Current I _{mpp} (A)		9.04	9.11	9.18	9.25
Open Circuit Voltage V _{oc} (V)		47.14	47.33	47.52	47.71
Short Circuit Current I _{sc} (A)		9.55	9.61	9.66	9.71
Module Efficiency (%)		17.7%	17.9%	18.2%	18.5%

ELECTRICAL PERFORMANCE PARAMETERS

I _{sc} Temperature Coefficient	α (%/°C)	+0.055	Max. Series Fuse	15A
V _{oc} Temperature Coefficient	β (%/°C)	-0.30	Max. System Voltage	IEC 1000V
P _{max} Temperature Coefficient	γ (%/°C)	-0.40	Nominal Operating Cell Temp. (NOCT)	45°C ± 2°C
Efficiency Reduction at 200W/m ² , 25°C		<5%		

IV parameters are rated at Standard Test Conditions (Irradiance of 1000 W/m², AM 1.5, cell temperature 25°C). All measurements are guaranteed at the laminate leads. NOCT is measured at 800 W/m², 20°C ambient, and 1 m/s windspeed. Specifications are subject to change without notice. Motech reserves the rights of final interpretation and revision on this datasheet.

DOC17CN011 Rev A Feb 2017