





Easy Installation and Handling for Various Applications



Conforms to IEC 61215:2005, IEC 61730:2004 PV Standards



ISO9001, OHSAS18001, ISO14001 Certified

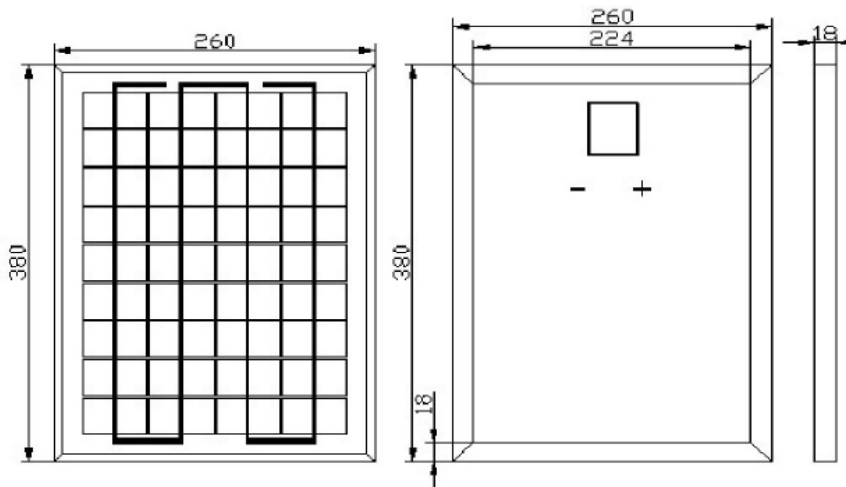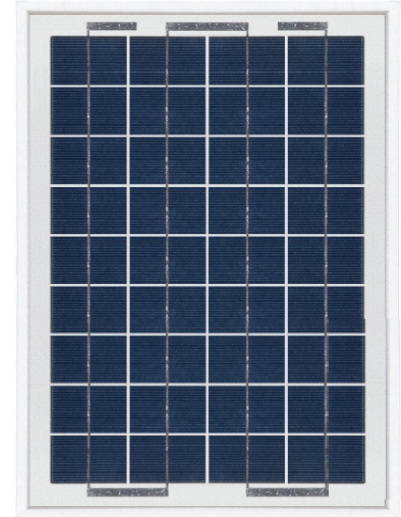

Mechanical Characteristics

Cell Type	Polycrystalline 52 x 34.66 mm
Glass	High Transmission, Low Iron, Tempered Glass, thickness 3.2mm
Frame	Anodized Aluminum Alloy
Dimensions	260 x 380 x 18 mm
Weight	1.3 kg
Installation Hole Location	See Drawing Above

Electrical Characteristics STC

RS-SL10TU-18P

Maximum Power (Pmax)	10 W
Power Tolerance	0 ~ +3%
Module Efficiency	10.12%
Maximum Power Current (Imp)	0.54A
Maximum Power Voltage (Vmp)	18.36 V
Short Circuit Current (Isc)	0.59 A
Open Circuit Voltage (Voc)	22.00 V



Characteristics

Temperature Coefficient of Voc	-0.38%/°C
Temperature Coefficient of Isc	0.04%/°C
Temperature Coefficient of Pmax	-0.47%/°C
Nominal Operating Cell Temperature (NOCT)	47°C±2°C

