


TM-Series

TM-M572200/210

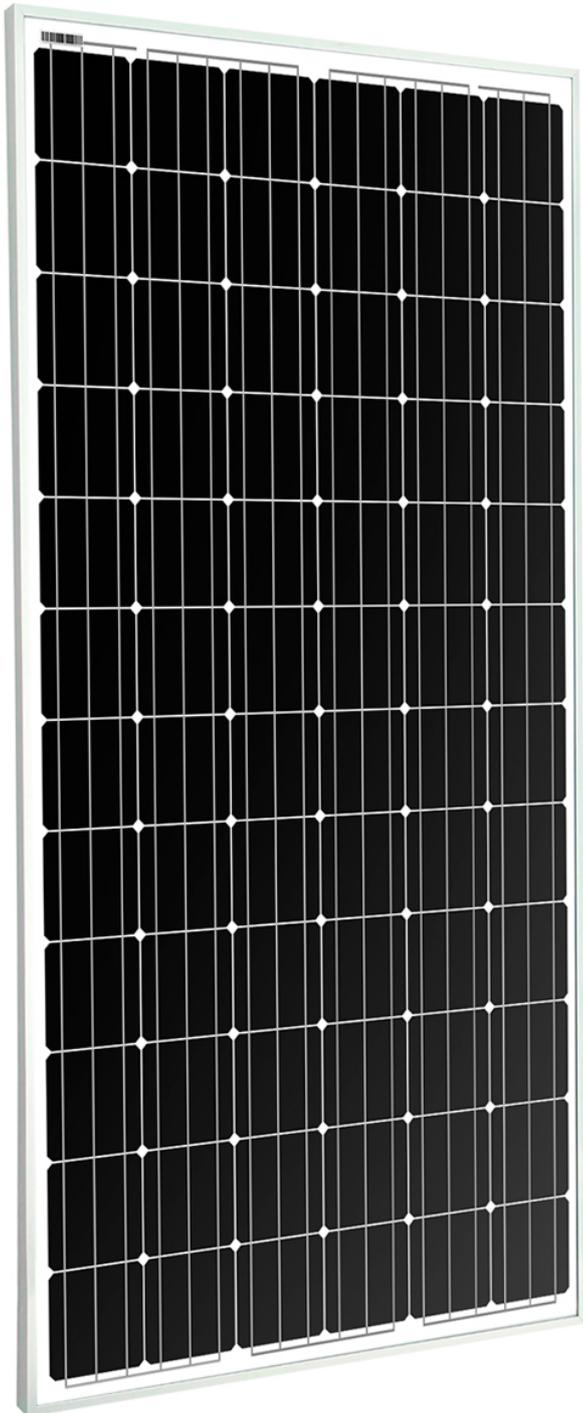


Monocrystalline
Solar Panels

200-210W
Power Range

16.45%
Efficiency

0/+5W
Tolerance

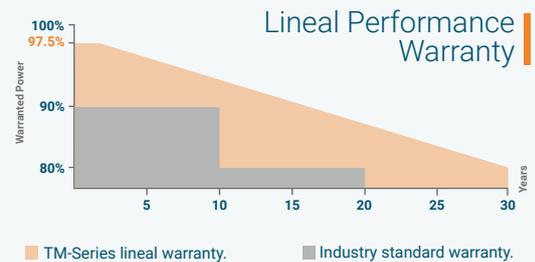

10 YEARS PRODUCT · 30 YEARS POWER

Key Features



High PID resistant
TM-Series has proved resistance to degradation induced power.



Advanced glass
High transmission glass resulting in increased energy production.



High efficiency and durability
Manufacturing process certified, excellent performance under low light environments.



Robust and corrosion free modules
Certified to withstand the most challenging environmental conditions.


 **Tamesol**
ENERGÍA PARA VIVIR

Where innovation for cost effectiveness becomes succes.

TM-M572200/210

MONOCRYSTALLINE PV MODULES

TM-Series

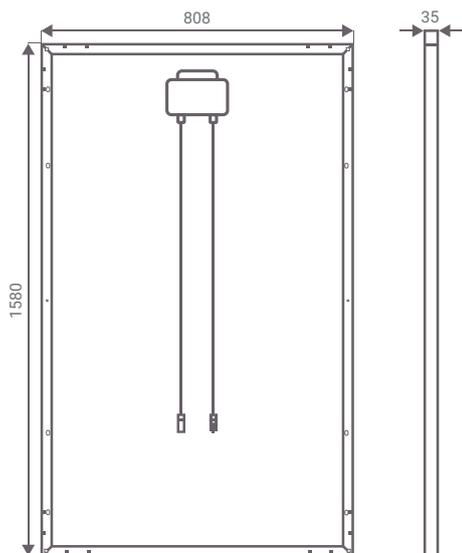

ELECTRICAL DATA

STC	TM M572200	TM M572205	TM M572210
Maximum Power at STC (Pmax)	200 W	205 W	210 W
Optimum Operating Voltage (Vmp)	37.74 V	37.83 V	38.08 V
Optimum Operating Current (Imp)	5.30 A	5.42 A	5.52 A
Open Circuit Voltage (Voc)	45.25 V	45.36 V	45.70 V
Short Circuit Current (Isc)	5.92 A	9.12 A	6.20 A
Module Efficiency	15.67 %	16.06 %	16.45 %

Electric characteristics at normal standard conditions (STC)
STC Conditions: Irradiance: 1.000W/m2, cell temperature: 25°C, AM=1.5

NOCT	TM M572200	TM M572205	TM M572210
Maximum Power at NOCT (Pmax)	147 W	151 W	155 W
Optimum Operating Voltage (Vmp)	35.66 V	35.75 V	35.99 V
Optimum Operating Current (Imp)	4.13 A	4.23 A	4.30 A
Open Circuit Voltage (Voc)	42.49 V	42.59 V	42.91 V
Short Circuit Current (Isc)	4.77 A	4.93 A	4.99 A

Electric characteristics at normal operation conditions (NOCT)
NOCT Conditions: Irradiance: 800W/m2, ambient temperature: 20°C, AM=1.5, wind speed: 1m/s

GENERAL CHARACTERISTICS

Dimensions	1580x808x35 mm
Weight	15 Kg

PACKAGING

Modules per Pallet	28
N° pallets per HC Container 40'	30

The max capacity per container are 1124 modules

TEMPERATURE RATING

NOCT	45 ± 2° C
Coefficient of (Pmax)	-0.48 %/°C
Coefficient of (Voc)	-0.34 %/°C
Coefficient of (Isc)	+0.037 %/°C

CERTIFICATIONS



IEC 6125, IEC 61730, ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:27, PV Cycle, UL, MCS, PID, WEEE.

OPERATIVE CONDITIONS

Power Tolerance	0/+5W
Max. System Voltage	1.000 V
Max. Series Fuse Rating	15 A
Operating Temperature Range	-40° C to 85 °C
Max. Static Load, Front (Snow)	5400 Pa
Max. Static Load, Back (Wind)	2400 Pa
Fire Rating	Class A

MECHANICAL CHARACTERISTICS

Solar Cells	Monocrystalline silicon 125x125 mm
Cell Arrangement	72 cells in series (6x12)
Front Cover	Low-iron tempered glass 3.2 mm
Frame	Anodized aluminum alloy
Encapsulant	EVA (ethylene vinyl acetate)
Junction Box	IP65
Bypass Diodes	3
Cables (length/area)	1000 mm / 4 mm ² (IEC), 12 AWG (UL)
Connectors	MC4

Caution:

To operate, install and manage Tamesol's modules, read the installation manual and use carefully.

Observations:

This Datasheet is subject to change without notice due to continuous improvement of our products. You can find all records of the updates on our website www.tamesol.com or by contacting one of our sales staff. All rights reserved ©Tamesol ®

Authorized Partner:



V7 - January 2017 - FO.901.V7 - Tamesol®

TMS PV MODULES AND SOLAR SYSTEMS SL

Verema Street, 19. Calonge (Girona) SPAIN

Tel: (+34) 932 20 00 74

info@tamesol.com

www.tamesol.com

