

ZT Series Polycrystalline

Solar Module

100P



Efficiency

High Module Conversion Efficiencies utilizing four bus bars per cell

Warranty

Peace of Mind Guaranteed with a twenty-five Year Linear Power Warranty and Product Quality Ensured for ten years

Certifications

IEC 61215:2005, IEC 61730:2004, UL 1703-3rd Ed: 2014, ULC/ORD C1703-01:2014, ISO 9001:2008, PSK 024:2008

Tolerance


Strict quality control guarantees higher average power output according to positive tolerance $\pm 3\%$.

Optimized Strength

Minimum standard for wind 2700Pa to a Mechanical load capacity up to 5400Pa meet customer's needs for durability on high mountains, sea shores, & paths between buildings



Module Construction

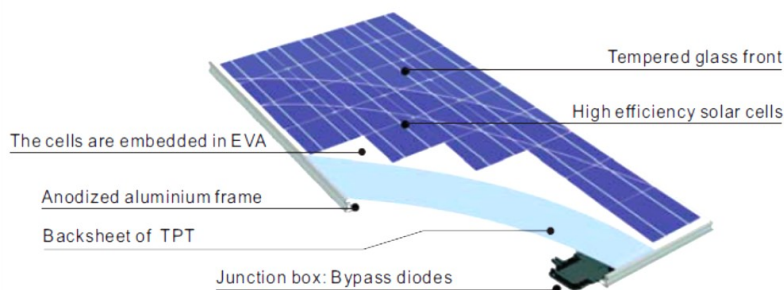

EMPOWERING You To Change The Future

Zytech was founded in Zaragoza (Spain) in 2005. Since then the group has progressively increased its infrastructure and production capacity to become a global power with offices and headquarters in Spain, Germany, France, Italy, BENELUX, Mexico, United States of America, Korea, Malaysia and China.

Zytech takes pride in their R&D department which specializes in product enhancement, state-of-the-art machinery and rigorous quality control that guarantees an European quality product at the best price.



www.zytechsolar.com

ZT Series Polycrystalline

Solar Module



100P

Cell Data	
Technology	Polycrystalline Silicon
Number Per Module	36
Dimension	110 x 156
Orientation	4 x 9


Thermal Data	
Nominal Operating Cell Temperature (NOCT)	45°C ± 2°C
Temperature Coefficient of Voc	-0.34% / °C
Temperature Coefficient of Isc	+0.045% / °C
Temperature Coefficient of Power Pmax	-0.47% / °C

Electrical Data (STC)		ZT100P
Maximum power (W)	Pmax	100
Power Output Tolerance (%)		0% to 3%
Maximum Power Voltage (V)	Vmpp	17.60
Maximum Power Current (A)	Impp	5.69
Open Circuit Voltage (V)	Voc	22.60
Short Circuit Current (A)	Isc	6.09
Module Efficiency (%)		16.50%

* At Standard Conditions (STC) Irradiance 1000 watt/m², spectrum AM 1,5 at a cell temperature of 25°C

System Integrated Parameters	
Maximum System Voltage SCII	1000 VDC (UL1000V)
Maximum Reverse Current	Do not apply external voltages larger than Voc to the module
Operating Temperature	-40~+85°C
Max Series Fuse Rating	15A


UI and UP Curve

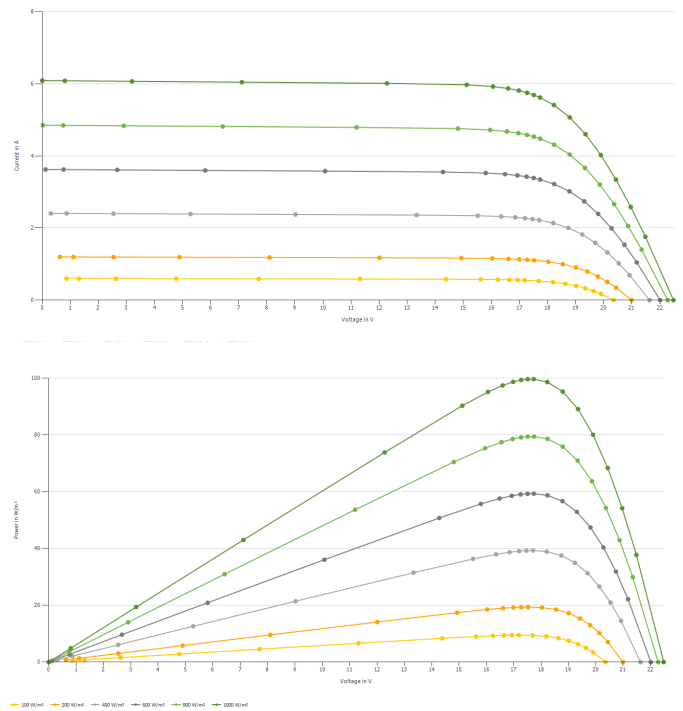

Front

Side

Rear

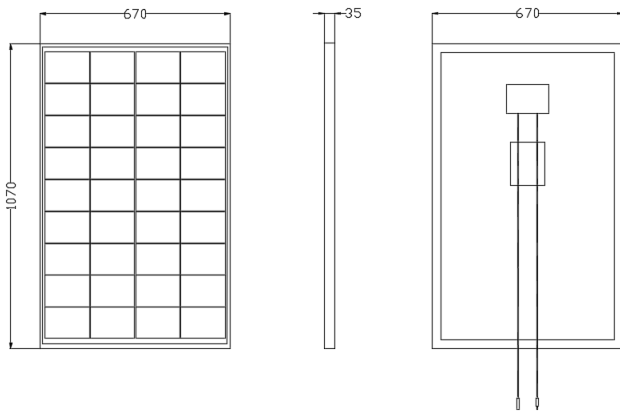

Physical Characteristics

Module Dimension (L×W×H)	1073 x 670 x 35mm Code: PV30086
Weight	8 kg
J-Box	IP65 or IP67 rated, 2 diodes
Connector	MC4 or MC4 Compatible
Glass	3.2mm (0.13 in), High Transmission, AR Coated Tempered Glass
Cable	4 mm ² PV cable 900mm
Frame	Silver Anodized Aluminum Alloy

ZYTECH

P. Industrial Centrovía- C/ Santo Domingo, 14
50198 La Muela (Zaragoza) SPAIN

Tel: +34 976 141819 / Fax: +34 976+141818

info@zytech.es

www.zytechsolar.es

Zytech reserves the right to change specifications without notice