

# ZT Series Polycrystalline

Solar Module

260P/265P/270P



## Efficiency

High Module Conversion Efficiencies utilizing four bus bars per cell

## Warranty

Peace of Mind Guaranteed with a twenty-five Year Linear Power Warranty and Product Quality Ensured for ten years

## Certifications

IEC 61215:2005, IEC 61730:2004, UL 1703-3rd Ed: 2014, ULC/ORD C1703-01:2014, ISO 9001:2008, PSK 024:2008

## Positive Tolerance


Strict quality control guarantees higher average power output according to positive tolerance -0/+3% Wp.

## Optimized Strength

Minimum standard for wind 2700Pa to a Mechanical load capacity up to 5400Pa meet customer's needs for durability on high mountains, sea shores, & paths between buildings



### Module Construction

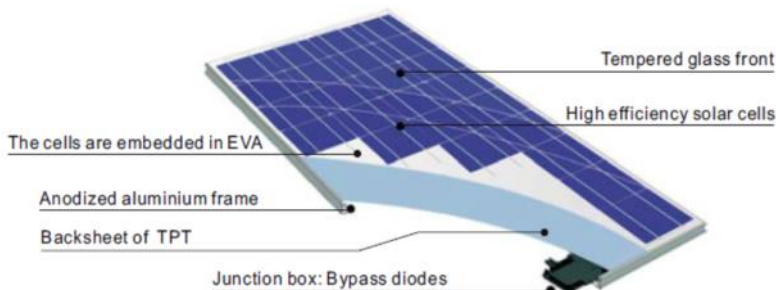

**EMPOWERING You**  
To Change The Future

Zytech was founded in Zaragoza (Spain) in 2005. Since then the group has progressively increased its infrastructure and production capacity to become a global power with offices and headquarters in Spain, Germany, France, Italy, BENELUX, Mexico, United States of America, Korea, Malaysia.

Zytech takes pride in their R&D department which specializes in product enhancement, state-of-the-art machinery and rigorous quality control that guarantees an European quality product at the best price.



[www.zytechsolar.com](http://www.zytechsolar.com)

# ZT Series Polycrystalline

Solar Module



260P/265P/270P

## Cell Data

Technology	Polycrystalline Silicon
Number Per Module	60
Dimension	156 × 156mm (6 inches)
Orientation	6 × 10

## Thermal Data

Nominal Operating Cell Temperature (NOCT)	45°C ± 2°C
Temperature Coefficient of Voc	- 0.34% / °C
Temperature Coefficient of Isc	+0.049 % / °C
Temperature Coefficient of Power Pmax	- 0.41 % / °C


## Electrical Data (STC)

		ZT260P	ZT265P	ZT270P
Maximum power (W)	Pmax	260	265	270
Power Output Tolerance (%)		0/+3%		
Maximum Power Voltage (V)	Vmpp	31.3	31.7	32.1
Maximum Power Current (A)	Imp	8.32	8.37	8.42
Open Circuit Voltage (V)	Voc	37.6	37.8	38.0
Short Circuit Current (A)	Isc	8.97	9.04	9.11
Module Efficiency (%)		16%	16,3%	16.6%


\* At Standard Conditions (STC) Irradiance 1000 watt/m<sup>2</sup>, spectrum AM 1,5 at a cell temperature of 25°C

## System Integrated Parameters

Maximum System Voltage SCII	1000 VDC (UL1000V)
Maximum Reverse Current	Do not apply external voltages larger than Voc to the module
Operating Temperature	-40~+85°C
Max Series Fuse Rating	15A

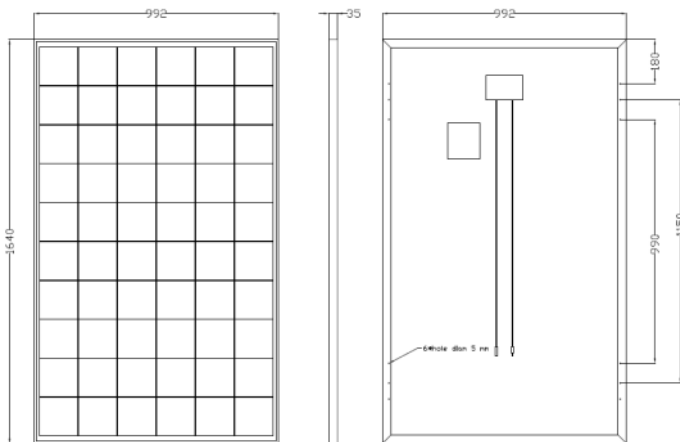

## UI and UP Curve 270Wp

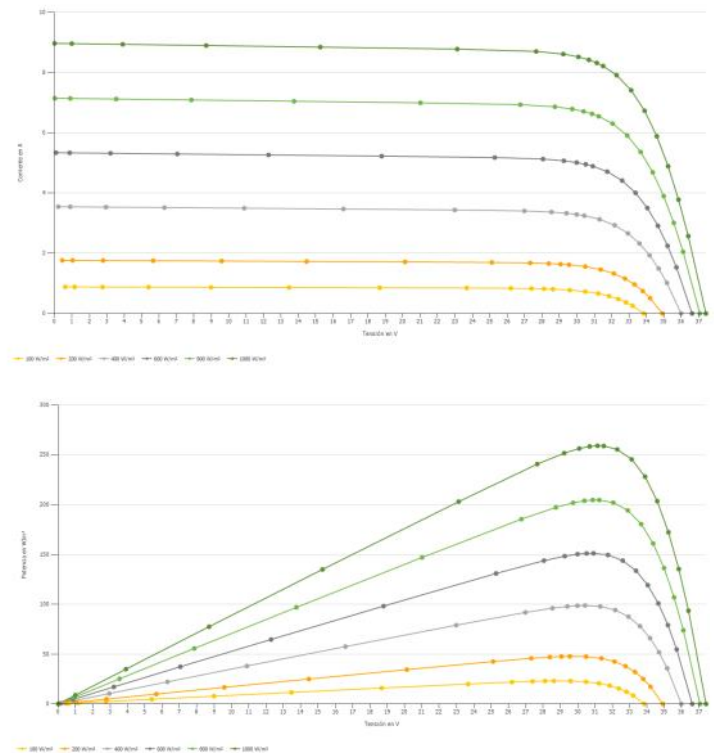

## Physical Characteristics

Module Dimension (L×W×H)	1640×992×35mm Codes: PV30049 (ZT260P), PV30022 (ZT265P), PV30077 (ZT270P)
Weight	18.5 kg
Module IP Grade / J-Box	IP67 Module Rated / 3 Bypass Diodes IP67
Connector	MC4 or MC4 Compatible
Glass	3.2mm (0.13 in), High Transmission, AR Coated Tempered Glass
Cable	4 mm <sup>2</sup> PV cable, 900mm
Frame	Silver/ Black Anodized Aluminum Alloy

## Packing Configuration

Modules Per Pallet	29
Modules Per 40' Container	910
Packing Box Dimension (L×W×H)	1700×1150×1040 mm
Packing Orientation	Side

\*Zytech Solar reserves the right to change specifications without notice\*  
\*Dimension tolerance: ±1mm per each side

**ZYTECH**

P. Industrial Centrovía- C/R. Janeiro, 12  
50198 La Muela (Zaragoza) SPAIN  
Tel: +34 976 141819 / Fax: +34 976+141818  
info@zytech.es  
www.zytechsolar.es