

ZT Series Polycrystalline

Solar Module

320P/325P/330P



Efficiency

High Module Conversion Efficiencies utilizing three or four bus bars per cell

Warranty

Peace of Mind Guaranteed with a twenty-five Year Linear Power Warranty and Product Quality Ensured for ten years

Certifications

IEC 61215:2005, IEC 61730:2004, UL 1703-3rd Ed: 2014, ULC/ORD C1703-01:2014, ISO 9001:2008, PSK 024:2008

Tolerance


Strict quality control guarantees higher average power output according to tolerance
0% to +3% of maximum power

Optimized Strength

Minimum standard for wind 2400Pa to a Mechanical load capacity up to 5400Pa meet customer's needs for durability on high mountains, sea shores, & paths between buildings



Module Construction

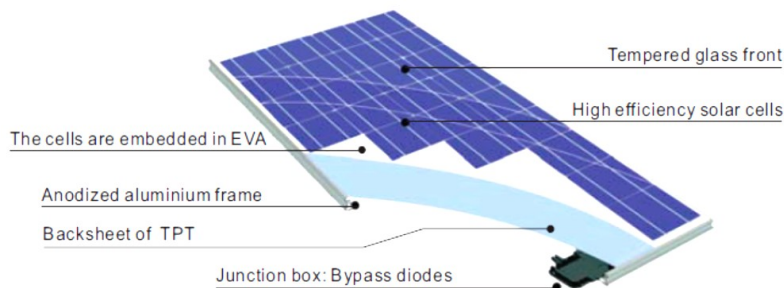

EMPOWERING You To Change The Future

Zytech was founded in Zaragoza (Spain) in 2005. Since then the group has progressively increased its infrastructure and production capacity to become a global power with offices and headquarters in Spain, Germany, France, Italy, BENELUX, Mexico, United States of America, Korea, Malaysia and China.

Zytech takes pride in their R&D department which specializes in product enhancement, state-of-the-art machinery and rigorous quality control that guarantees an European quality product at the best price.



www.zytechsolar.com

ZT Series Polycrystalline

Solar Module



320P/3 P/3 0P

Cell Data

Technology	Polycrystalline Silicon
Number Per Module	72
Dimension	156 × 156
Orientation	6 × 12

Thermal Data

Nominal Operating Cell Temperature (NOCT)	45°C ± 2°C
Temperature Coefficient of Voc	-0.31% / °C
Temperature Coefficient of Isc	+0.06% / °C
Temperature Coefficient of Power Pmax	-0.41% / °C

Electrical Data (STC)



		ZT320P	ZT325P	ZT330P
Maximum power (W)	Pmax	320	325	330
Power Output Tolerance (%)		0% to +3%		
Maximum Power Voltage (V)	Vmpp	37.40	37.60	37.80
Maximum Power Current (A)	Imp	8.56	8.66	8.74
Open Circuit Voltage (V)	Voc	46.40	46.70	46.90
Short Circuit Current (A)	Isc	9.05	9.10	9.14
Cell Efficiency (%)		18.62%	18.92%	19.22%
Module Efficiency (%)		16.49%	16.75%	17.01%

* At Standard Conditions (STC) Irradiance 1000 watt/m², spectrum AM 1,5 at a cell temperature of 25°C

System Integrated Parameters

Maximum System Voltage SCII	1000 VDC (IEC)
Maximum Reverse Current	Do not apply external voltages larger than Voc to the module
Operating Temperature	-40~+85°C
Max Series Fuse Rating	15A

IU and PU Curve

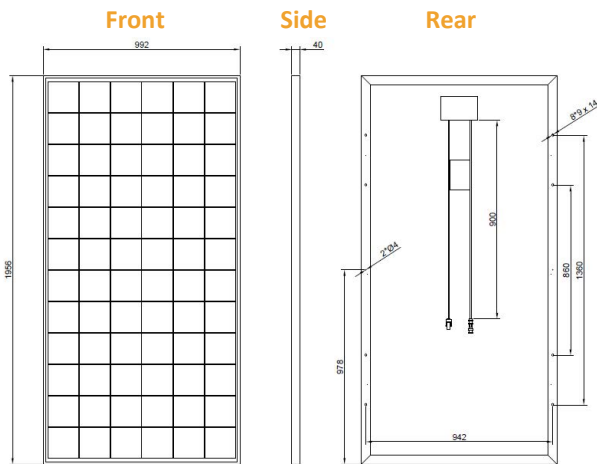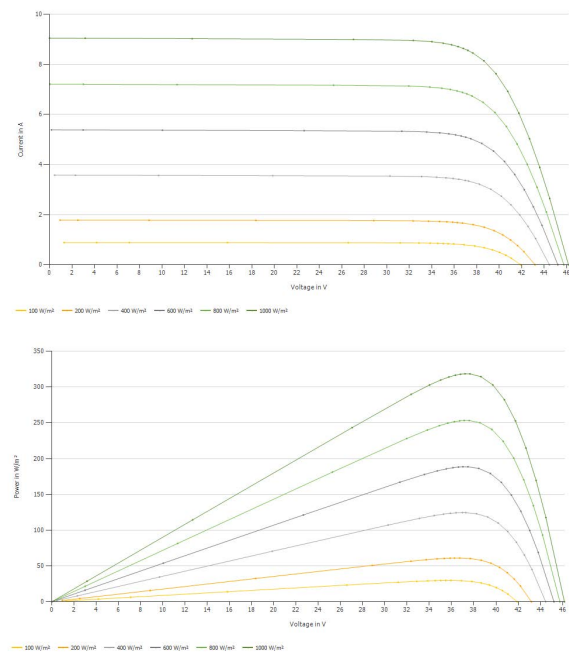

Model: ZT320P/ZT325P/ZT330P
Codes: PV30072/PV30073/PV30074

Physical Characteristics

Module Dimension (L×W×H)	1956×992×40mm Code: PV30072-ZT320P, PV30073-ZT325P, PV30074-ZT330P
Weight	20.5 kg
J-Box	IP67 rated, 6 diodes
Connector	MC4 or MC4 Compatible IP67
Glass	4 mm, High Transmission, Low Iron, AR Coated Tempered Glass
Cable	TUV 1 x 4 mm ² PV cable, 900mm
Frame	Silver/ Black Anodized Aluminum Alloy

Packing Configuration

Modules Per Pallet	25
Pallet Per 40' HQ Container	24 pallets and 600pcs
Packing Box Dimension (L×W×H)	2000×1150×1040 mm
Packing Orientation	Side

ZYTECH

P. Industrial Centrovía- C/R. Janeiro, 12
50198 La Muela (Zaragoza) SPAIN
Tel: +34 976 141819 / Fax: +34 976+141818
info@zytech.es
www.zytechsolar.es

Zytech Solar reserves the right to change specifications without notice
*Dimension tolerance: ±1mm per each side