




**P72PCS**  
 340W/330W/325W/320W  
 315W/310W/300W  
**PRODUCT SPECIFICATION**




- Industry leading module power output warranty
- International quality, safety and performance certifications
- Manufacturing facility certified to ISO9001 quality management system standards
- Beautiful appearance, good durability & easy installation
- Special design in accordance with requirements of customers

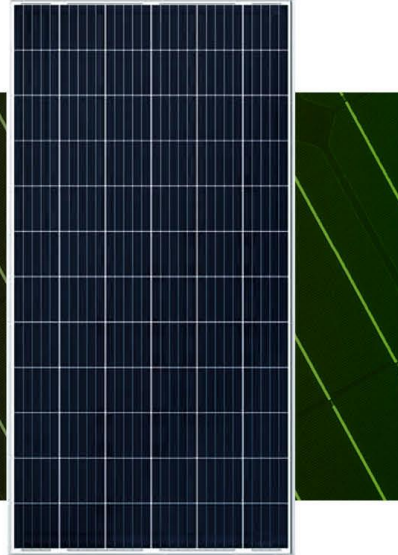

**WARRANTIES**

- 12 years for product defects in materials & workmanship
- 12 years for 90% of warranted minimum power output
- 25 years for 80% of warranted minimum power output
- 25 years linear warranty



**QUALITY DESIGN | GREAT DURABILITY | EASY INSTALLATION**

Zhejiang BLD Solar Technology Co., LTD  
 Qinggang Industrial Zone, Yuhuan, Zhejiang, 317606 China  
 Tel: +86 576-81731999 Fax: +86 576-81731990  
 E-mail: sales@bldsolar.com Http://www.bldsolar.com

## P72PCS 340W/330W/325W/320W/315W/310W/300W PRODUCT SPECIFICATION

Electrical parameters at standard test conditions  
(STC:AM=1.5, 1000W/m<sup>2</sup>, Cells Temperature 25°C)

Typical type	340W	330W	325W	320W	315W	310W	300W
Max power(Pmax)	340	330	325	320	315	310	300
Max power voltage(Vmp)	38.95	38.16	37.84	37.62	37.55	37.45	37.18
Max power current(Imp)	8.73	8.65	8.59	8.51	8.39	8.28	8.07
Open circuit voltage(Voc)	47.11	46.00	45.54	45.20	45.04	44.91	44.57
Short circuit current(Isc)	9.34	9.22	9.13	9.03	8.89	8.77	8.54
Cell efficiency(%)	19.79	19.21	18.91	18.62	18.33	18.20	17.60
Module Efficiency(%)	17.52	17	16.74	16.49	16.23	15.97	15.46
Max system voltage	DC 1000V(TUV)/600V(UL)						
Maximum Series Fuse Rating	15A						

### Mechanical Data

Dimensions	1956×992×40mm (77.01×39.06×1.58 inch)
Weight	22kgs
Front glass	3.2 mm tempered glass
Output cables	4 mm <sup>2</sup> symmetrical lengths 900 mm
Connectors	MC4 compatible IP67
Cell type	Poly Crystalline Silicon 156mmx156mm
Number of cells	72 cells in series

### Temperature Characteristics

Temp.Coeff.of Isc(TK Isc)	0.07% / °C
Temp.Coeff.of Voc(TK Voc)	(-0.36%) / °C
Temp.Coeff.of Pmax(TK Pmax)	(-0.38%) / °C
Operating temperature	(-40~+85%) °C
Normal operating cell temperature	45±2°C


### Packing Configuration

Container	20'GP	40'GP	40'HQ
Pieces per pallet	48	48	58
Pallets per container	5	11	11
Pieces per container	240	528	638


### Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730
System certs	ISO 9001, ISO14001
Certifications	CQC,TUV,CE,MCS,CEC,CHUBB,PPP58042B, Salt Mist&Ammonia Proof,PID FREE
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Positive tolerance	0~±3%
Junction box	IP67
Warranties	12 years product warranty and 25 years 80% of power


### Dimensions and Structure

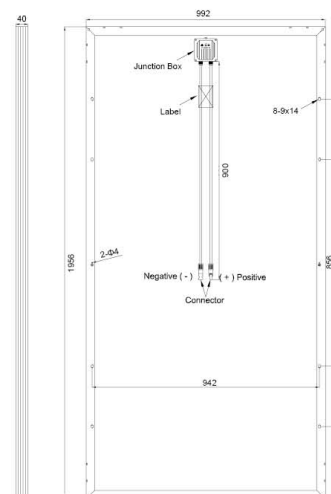

### I-V Curve

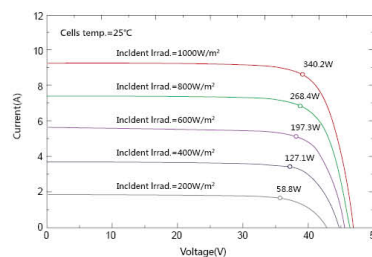

I-V Curves at different irradiance

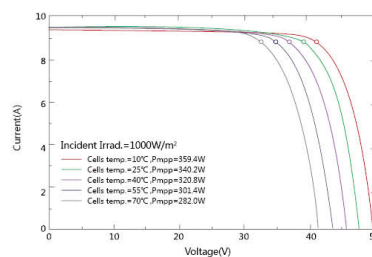

I-V Curves at different temperature

Zhejiang BLD Solar Technology Co., LTD  
Qinggang Industrial Zone, Yuhuan, Zhejiang, 317606 China  
Tel: +86 576-81731999 Fax: +86 576-81731990  
E-mail: sales@bldsolar.com Http://www.bldsolar.com