




ELECTRICAL SPECIFICATIONS

Model NO.	SLS015M	SLS017M
Peak power(Pmax)	15W	17W
Maximum power voltage(Vmp)	18.0V	18.2V
Maximum power current(Imp)	0.83A	0.93A
Short-circuit current(Isc)	0.87A	0.99A
Open circuit voltage(Voc)	22.2V	22.6V
Cell efficiency(η)	16.00%	17.20%
Power tolerance:	±3%	
Operating temperature	-40°C to +85°C	
Maximum system voltage	600VDC	

PHYSICAL CHARACTERISTICS

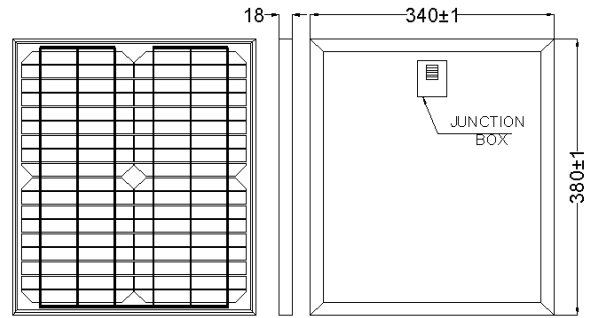


TEMPERATURE COEFFICIENT

Current temperature coefficient	0.037%/°C
Voltage temperature coefficient	-0.34%/°C
Power temperature coefficient	-0.48%/°C

STC: Irradiance of 1000W /m2, AM 1.5, Cell Temperature of 25°C

ELECTRICAL CHARACTERISTICS

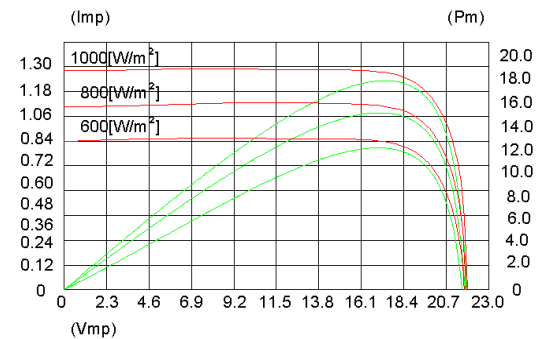


MECHANICAL SPECIFICATIONS

Cell Type	156mm x 156mm
Number of Cells	36 cells in series
Weight	2.1kg (4.75lbs)
Dimension	380x340x18mm
Max Load	5400 Pascals (112 lb/ft2)
Junction Box	
Cable/Connector	

ELECTRICAL SPECIFICATIONS

Model NO.	SLS020M
Peak power(Pmax)	20W
Maximum power voltage(Vmp)	18.0V
Maximum power current(Imp)	1.11A
Short-circuit current(Isc)	1.17A
Open circuit voltage(Voc)	22.4V
Cell efficiency(η)	16.50%
Power tolerance:	±3%
Operating temperature	-40°C to +85°C
Maximum system voltage	600VDC

PHYSICAL CHARACTERISTICS

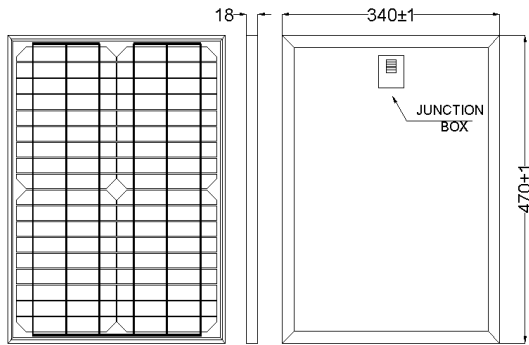


TEMPERATURE COEFFICIENTS

Current temperature coefficient	0.037%/°C
Voltage temperature coefficient	-0.34%/°C
Power temperature coefficient	-0.48%/°C

STC: Irradiance of 1000W /m2, AM 1.5, Cell Temperature of 25°C

ELECTRICAL CHARACTERISTICS

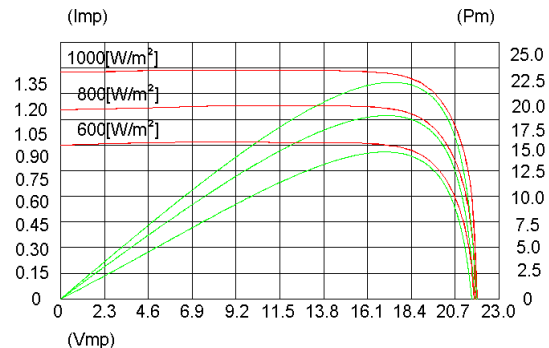

MECHANICAL SPECIFICATIONS

Cell Type	156mm x 156mm
Number of Cells	36 cells in series
Weight	2.6kg (5.72lbs)
Dimension	470x340x18mm
Max Load	5400 Pascals (112 lb/ft2)
Junction Box	
Cable/Connector	