

# Hyperion™

High Efficiency Module

**Poly 72<sup>Cells</sup>** 315-330W

## Features



Nano texturing cell process ensures better absorption of diffused reflection spectrum and more cell efficiency up to 4%



Higher power classes in equivalent module sizes



More energy yield up to 3% (kwh/kw)



Anti-PID



IP68 connectors enhance the reliability of the PV system



Certified to withstand increased loads of up to 5400Pa



10-year product warranty



25-year performance warranty



**Bloomberg Tier1**  
NEW ENERGY FINANCE

**TOP**  
DNV·GL PERFORMER

### ABOUT PHONO SOLAR

Phono Solar Technology Co., Ltd is one of the world's leading renewable energy product manufacturers and a well trusted brand provider. The Phono Solar brand has become synonymous with high performing, top quality photovoltaic panels that are ideal for use in large scale power plants, commercial and residential installations.

**SINOMACH | SUMEC**  
SUMEC GROUP CORPORATION

# Hyperion™ High Efficiency Polycrystalline Module | PS315-330P-24/T

## ELECTRICAL TYPICAL VALUES

Model	Rated Power (Pmpp)	Rated Current (Impp)	Rated Voltage (Vmpp)	Short Circuit Current (Isc)	Open Circuit Voltage (Voc)	Module Efficiency (%)
PS315P-24/T	315	8.59	36.80	8.97	46.09	16.23
PS320P-24/T	320	8.66	37.05	8.99	46.17	16.49
PS325P-24/T	325	8.73	37.30	9.01	46.25	16.75
PS330P-24/T	330	8.80	37.55	9.03	46.33	17.01


## MECHANICAL CHARACTERISTICS

Solar Cells	Polycrystalline, 6 inch x 6 inch square, 6 × 12 pieces in series
Dimension (A × B × C)	Length: 1956mm (77.01inch)
	Width: 992mm (39.06 inch)
	Height: 45mm (1.77 inch)
Weight	24kg (52.91 lb)
Front Glass	3.2mm toughened glass
Frame	Anodized aluminium alloy
Cable	4mm <sup>2</sup> (IEC) / 12AWG(UL), 1100mm
Junction Box	IP 68 rated

## ABSOLUTE MAXIMUM RATING

Parameter	Values
Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Surface Maximum Load Capacity	Up to 5400Pa
Maximum Series Fuse Rating	15A
IEC Application Class (IEC61730)	A
Fire Rating (IEC61730)	C
Maximum System Voltage	DC 1000V(IEC)
Tolerance	0~+5W

## DIMENSIONS

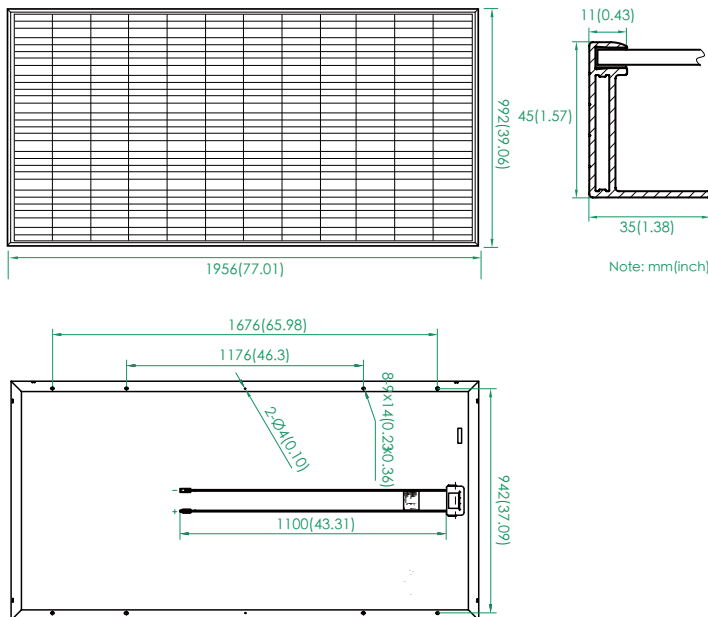

## TEMPERATURE CHARACTERISTICS

NOCT (Nominal Operation Cell Temperature)	45±2°C
Voltage Temperature Coefficient	-0.31%/°C
Current Temperature Coefficient	0.05%/°C
Power Temperature Coefficient	-0.41%/°C


## WEAK LIGHT PERFORMANCE

Intensity [W/m <sup>2</sup> ]	Impp	Vmpp
1000	1.0	1.000
800	0.8	0.996
600	0.6	0.990
400	0.4	0.982
200	0.2	0.951
100	0.1	0.923

## PACKING CONFIGURATION

Container	40' HQ	20' GP
Pieces per container	576	200

## PARTNER INFORMATION

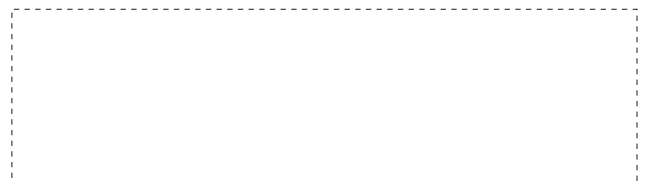

- In compliance with our warranty terms and conditions.
- Measurement conditions under irradiance level of Standard Test Conditions(STC): 1000W/m<sup>2</sup>, Air mass 1.5 Spectrum, cell temperature of 25°C.



**Phono Solar**  
SHARE THE SUN, POWER THE FUTURE!

Version: EN-U-HP-20170630

**Phonosolar Solar Technology Co., Ltd**

Add: No. 1 Xinghuo Road,  
Nanjing Hi-tech Zone, Nanjing China  
Tel: +86 25 5863 8000 / Fax: +86 25 5863 8009  
E-mail: info@phonosolar.com

Note: This datasheet is not legally binding.  
Phono Solar Technology Co., Ltd. reserves the right to adjust specifications without notice.  
Further information please refer to our website:  
[www.phonosolar.com](http://www.phonosolar.com)

