

# STANDARD MODULE

(ALL BLACK MODULE IS OPTIONAL)



## Cetesolar 72 315-335 Watt

POLY CRYSTALLINE MODULE

Positive power tolerance of 0~+3%

ISO9001:2008、ISO14001:2004、OHSAS18001  
certified factory.  
IEC61215、IEC61730 certified products.

(4BB)



### KEY FEATURES



#### 4 Busbar Solar Cell:

4 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



#### High Power Output:

Polycrystalline 72-cell module achieves a power output up to 335Wp.



#### PID RESISTANT:

Limited power degradation of Eagle module caused by PID effect is guaranteed under strict testing condition (85 C /85%RH,96hours) for mass production.



#### Low-light Performance:

Advanced glass and surface texturing allow for excellent performance in low-light environments.



#### Severe Weather Resilience:

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



#### Durability against extreme environmental conditions:

High salt mist and ammonia resistance certified by TUV NORD.




#### Temperature Coefficient:


Improved temperature coefficient decreases power loss during high temperatures.

### LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

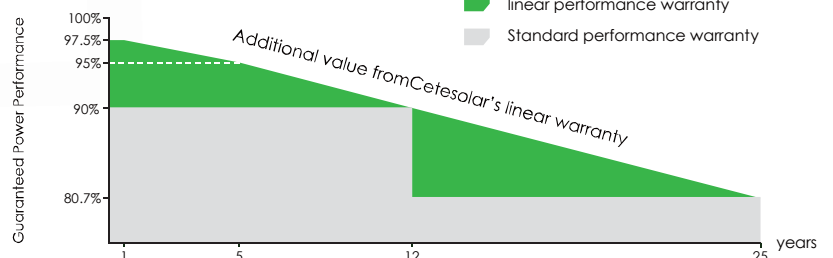

## Engineering Drawings

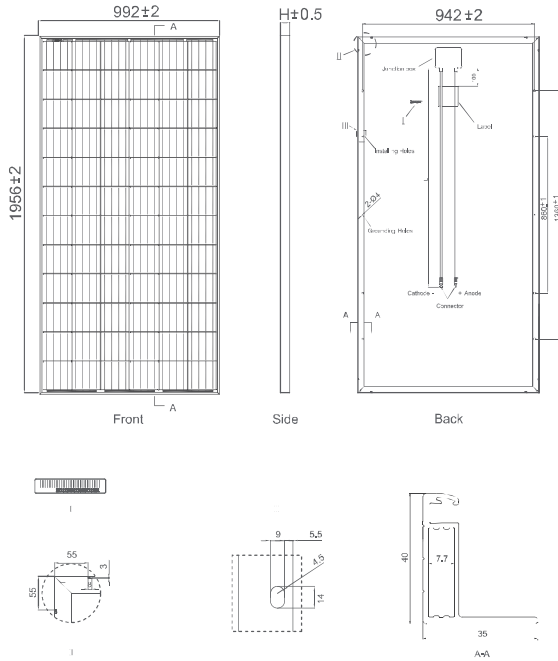


## Packaging Configuration

(Two boxes=One pallet)

26pcs/box, 52pcs/pallet, 624 pcs/40'HQ Container

## Electrical Performance & Temperature Dependence

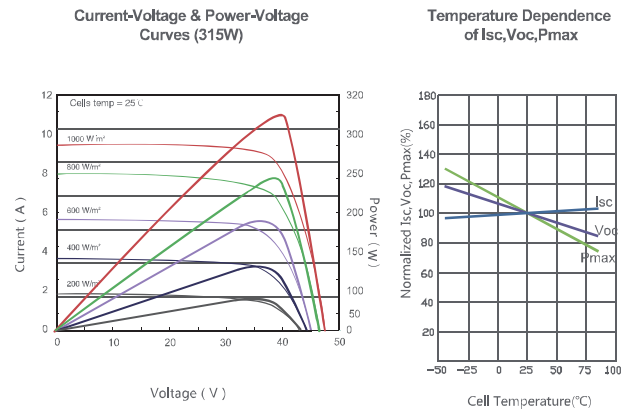

## Mechanical Characteristics

Cell Type	Poly-crystalline 156×156mm (6 inch)
No. of cells	72 (6×12)
Dimensions	1956×992×40mm (77.01×39.05×1.57 inch)
Weight	26.5 kg (58.4 lbs.)
Front Glass	4.0mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 1×4.0mm <sup>2</sup> , Length: 900mm or Customized Length

## SPECIFICATIONS

Module Type	CS315P-72		CS320P-72		CS325P-72		CS330P-72		CS335P-72	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	315Wp	235Wp	320Wp	238Wp	325Wp	242Wp	330Wp	246Wp	335Wp	250Wp
Maximum Power Voltage (Vmp)	37.2V	34.3V	37.4V	34.7V	37.6V	35.0V	37.8V	35.3V	38.0V	35.6V
Maximum Power Current (Imp)	8.48A	6.84A	8.56A	6.86A	8.66A	6.91A	8.74A	6.97A	8.82A	7.02A
Open-circuit Voltage (Voc)	46.2V	43.2V	46.4V	43.7V	46.7V	44.0V	46.9V	44.2V	47.2V	44.4V
Short-circuit Current (Isc)	9.01A	7.29A	9.05A	7.30A	9.10A	7.34A	9.14A	7.38A	9.18A	7.43A
Module Efficiency STC (%)	16.23%		16.49%		16.75%		17.01%		17.26%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000(or 1500)VDC (IEC)									
Maximum series fuse rating	15A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.40%/°C									
Temperature coefficients of Voc	-0.30%/°C									
Temperature coefficients of Isc	0.06%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

\* STC: Irradiance 1000W/m<sup>2</sup> Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m<sup>2</sup> Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

\* Power measurement tolerance: ± 3%

Cetesolar Co.,Ltd. | Mail:sales@cetesolar.com  
Office:+86-731-87012835

Skype:cetesolar  
Mobile/What'sApp:+86-18807419000