

POLY-CRYSTALLINE SOLAR MODULE - 48 CELLS


- **OS170P**
- **OS175P**
- **OS180P**
- **OS185P**

FEATURES

- High reliability with guaranteed 0 to +5% power output tolerance
- Passing mechanical load test of 5400 Pa to withstand heavier snow load and 2400 Pa to withstand wind pressure. Strong frame, easy to install
- High transparency tempered glass: 3.2 mm, with durable glass surface
- Excellent performance under low light environment
- Power series ranging from 170 to 200 watts meet different customers demands
- International quality and safety certifications


WARRANTIES

- 10 years limited product warranty
- 5 years at 95% of the minimal rated power output
- 10 years at 90% of the minimal rated power output
- 18 years at 85% of the minimal rated power output
- 25 years at 80% of the minimal rated power output

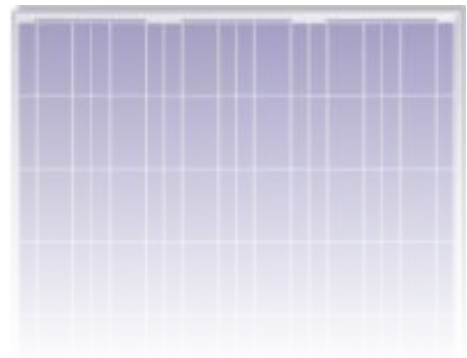


ELETRICAL CHARACTERISTICS*	OS170P	OS175P	OS180P	OS185P
Nominal Output (Pmax) [W]	170	175	180	185
Flash Test Power Classification [%]	0 / +5	0 / +5	0 / +5	0 / +5
Voltage at Pmax (Vmp) [V]	23	23	23.5	23.5
Current at Pmax (Imp) [A]	7.39	7.61	7.66	7.87
Open Circuit Voltage (Voc) [V]	29.2	29.2	29.9	29.9
Short Circuit Current (Isc) [A]	7.95	8.14	8.23	8.42
Maximum System Voltage [V]	IEC: 1000 / UL: 600			
Maximum Series Fuse Rating [A]	12			
Cell Efficiency [%]	14.55	14.88	15.41	15.84
Module Efficiency [%]	12.94	13.32	13.70	14.09

STC* (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, Air Mass 1.5

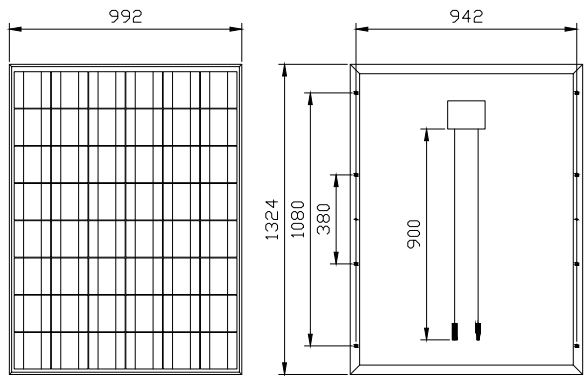TEMPERATURE CHARACTERISTICS		DIMENSIONS	
NOCT**	45±2 °C		
Temperature Coefficient of Pmax	-0.45 %/°C		
Temperature Coefficient of Voc	-0.35 %/°C		
Temperature Coefficient of Isc	0.05 %/°C		
Operating Temperature	-40 °C to +85 °C		
MECHANICAL CHARACTERISTICS			
Solar Cells	48(6x8) polycrystalline cells 156 mm		
Front Cover	3.2 mm thick, low iron tempered glass		
Back Cover	TPT (Tedlar-PET-Tedlar)		
Encapsulant	EVA (Ethylene vinyl acetate)		
Frame	Anodized aluminium alloy, double wall		
Diodes	6 Bypass diodes serviceable		
Junction Box	IP65 rated		
Connector	MC4 or compatible connector		
Cables	Length: 900 mm / Section: 4.0 mm ²		
Dimension [mm]	1324 x 992 x 45		
Weight [kg]	18		
Max. Load	Certified to 2400 Pa		

NOCT**: Nominal Operation Cell Temperature Sun 800W/m², Air 20°C, Wind speed 1m/s

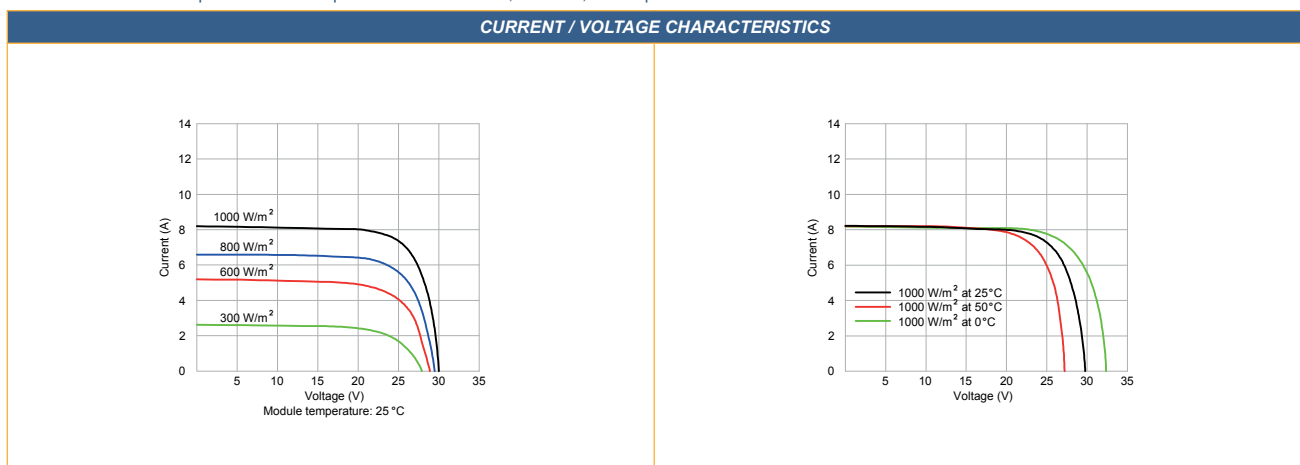

Oviera Solar reserves the right to make specifications changes without any prior notice
 This data sheet complies with the EN 50380 requirements
 April 2011 Oviera Solar Co.,Ltd. All rights reserved
www.ovierasolar.com info@ovierasolar.com

