

SPU-100P

Poly Crystalline Module



High Conversion Efficiency
High input efficiency to guarantee power output.



0 to +3% Positive Tolerance
Solar Panel will generate at least as much power as being shown on electrical sheet.



Self-Cleaning Glass
Made of a specific type of glass with a surface that keeps itself free of dirt and grime.



48-Hour Response Service
Ensure clients can get the response within 48-hour from our technical support team.



Free Microcrack
Our State of the Art Technologies ensure our Solar Panel to meet the expected lifespan.





20 Years Performance Warranty
With maximum degression in performance of 1% annually.



Outstanding Low Irradiation Performance
High yield performance even on low light such as cloudy or shaded conditions.



8 Years Materials & Workmanship Warranty
All of our products will be free from defects in material and workmanship, under normal use and proper handling.

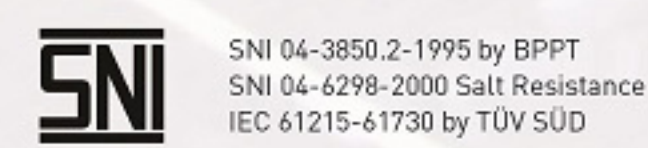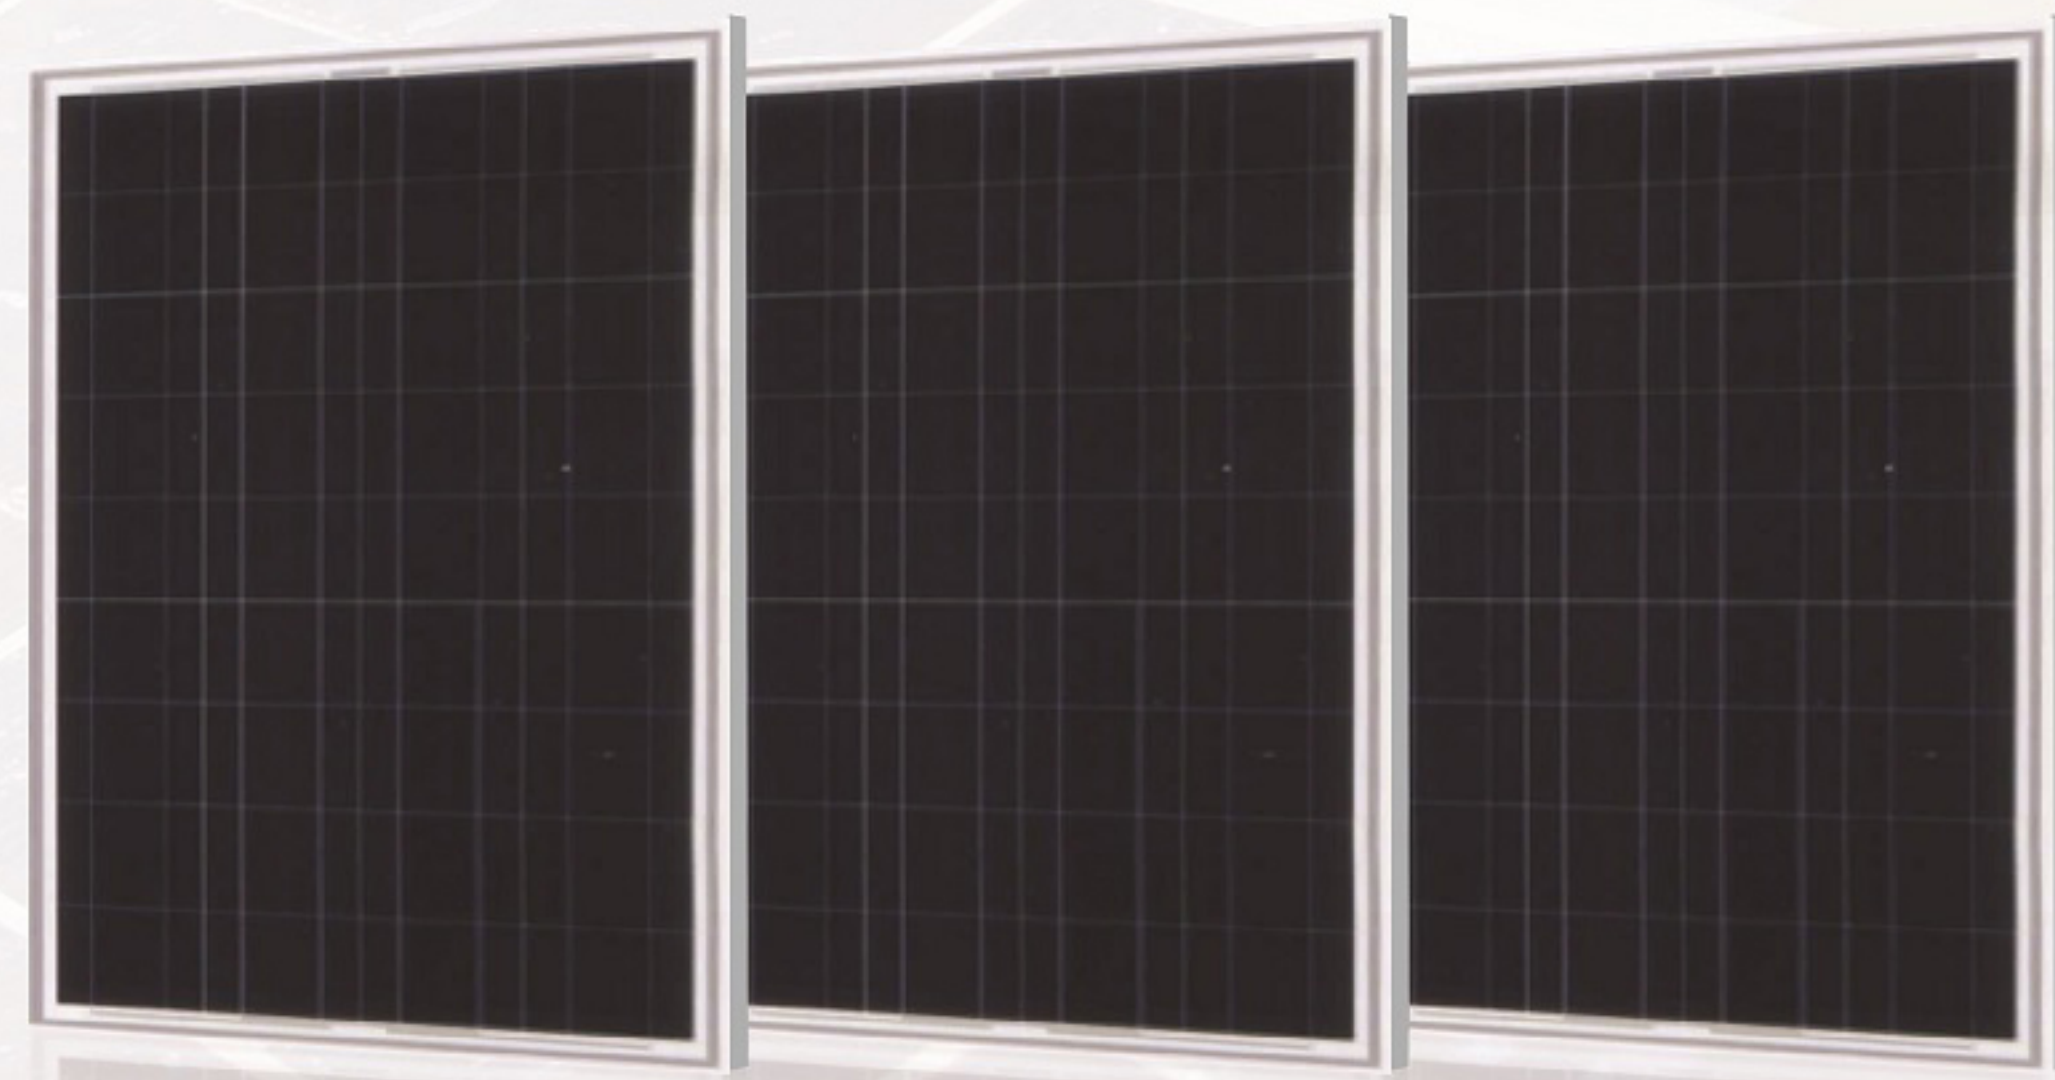

SPU-100P

Poly Crystalline Module

SPECIFICATIONS

ELECTRICAL SPECIFICATION

| Module Type | SPU-100P |
|---|-----------------------------|
| Maximum Power (Pmax) | 100 Wp |
| Maximum Power Voltage (Vmp) | 18.12 V |
| Maximum Power Current (Imp) | 5.69 A |
| Open-circuit Voltage (Voc) | 22.82 V |
| Short-circuit Current (Isc) | 6.11 A |
| Maximum System Voltage | 1000 V |
| Maximum Rated Current Series | 6.5 A |
| Power Tolerance | +3% |
| Nominal Operating Cell Temperature (NOCT) | 45±2°C |
| Module Efficiency | Please refer to Test Report |

MECHANICAL SPECIFICATION

| | |
|------------------------|---------------------------------|
| Cell Size | 112 x 156 mm |
| Number of Cell | 36 Cells |
| Netto Weight | 8.82 Kg |
| Gross Weight | 19.5 Kg |
| Dimension | 1066 x 667 x 30 mm |
| Bypass Diode | 2 |
| Junction Box IP Rating | IP 65 (dust & water protection) |
| Lifetime | 20 Years |


TEMPERATURE COEFFICIENT

| | |
|---------------------------------|------------|
| Operating Temperature | -40°C-85°C |
| Temperature Coefficient of Pmax | -0.45%/°C |
| Temperature Coefficient of Voc | -0.33%/°C |
| Temperature Coefficient of Isc | -0.04%/°C |

PACKING MANNER


| | |
|---------------------------|---------|
| Piece / Box | 2 Pcs |
| Piece / 20 Feet Container | 480 Pcs |
| Piece / 40 Feet Container | 880 Pcs |

ENGINEERING DRAWINGS

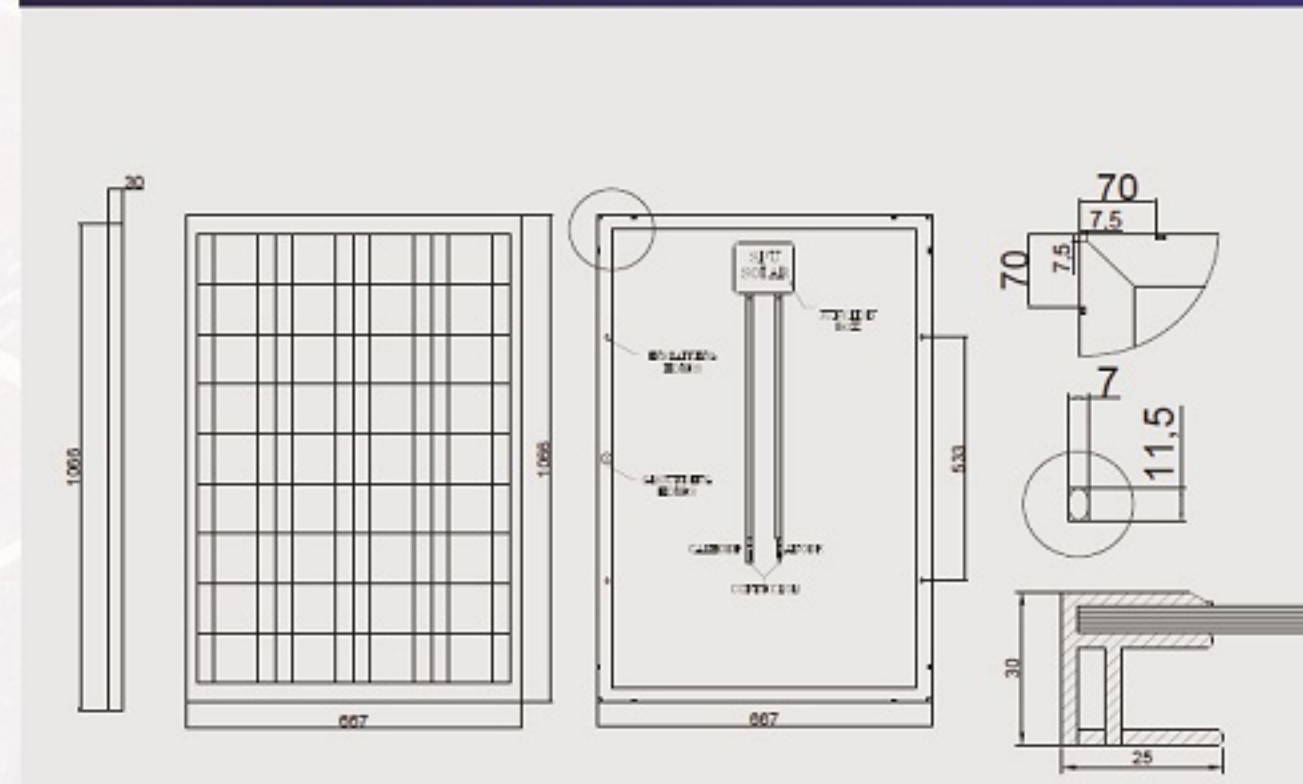

The company reserves the final right of explanation on any information hereby presented

I-V CURVES & TEMPERATURE

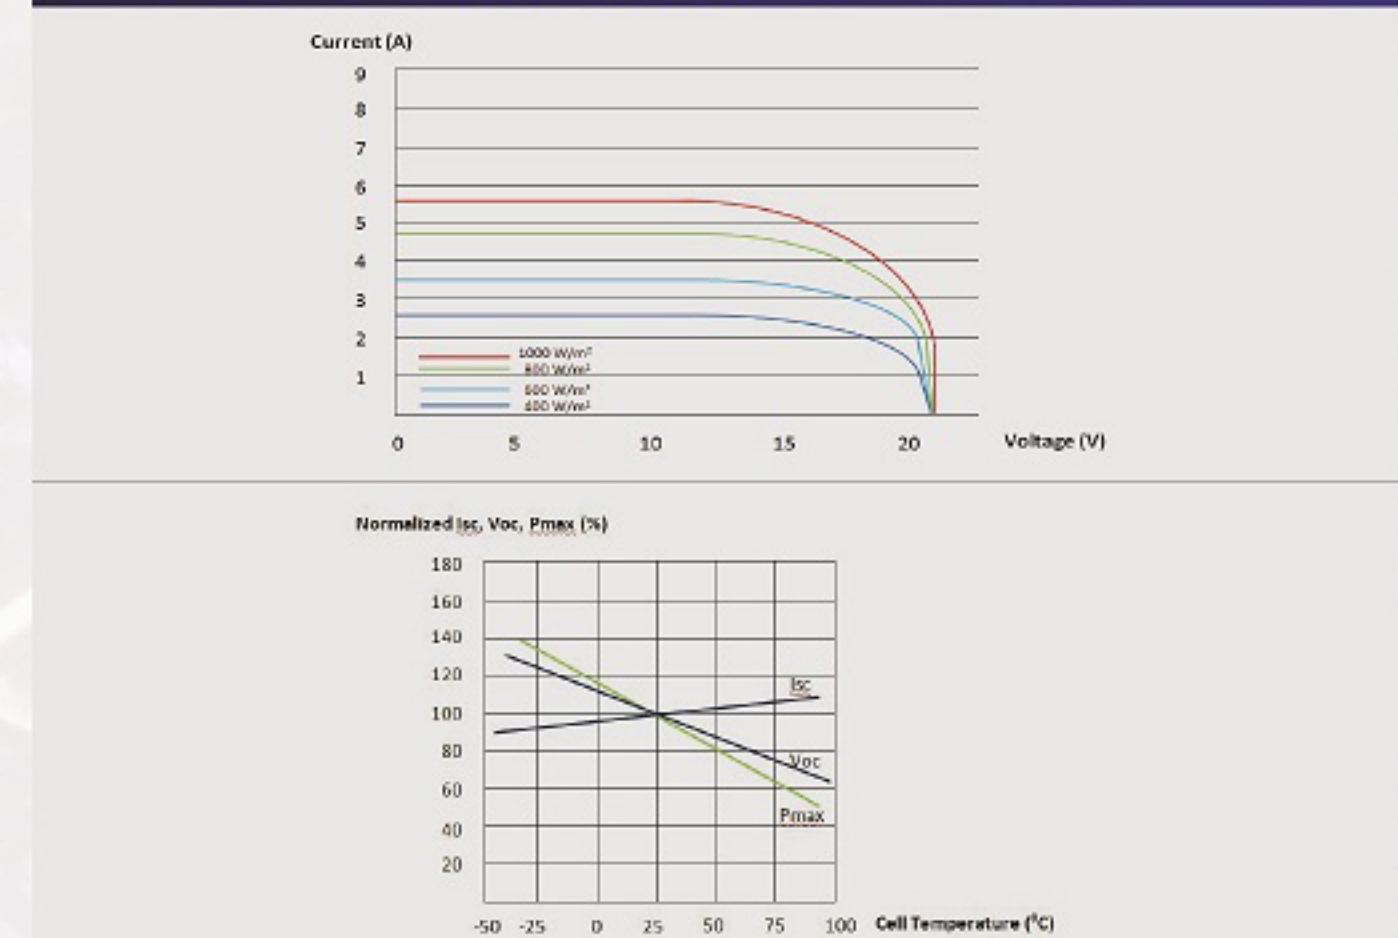

I-V Curves & Temperature Dependence of Isc, Voc, Pmax

STC : Irradiance 1000 W/m² Module Temperature 25°C AM=1.5

Please contact csfaswadayaprima.com for technical support. This parameters is for reference only and it is not a part of the contracts, The specification are subject to change without prior notice.