



# TSPP

# 300 Watt

# TSPM

## SPECIFICATIONS



**Front Glass**

AR coated 3.2 mm Low iron tempered glass

**Frame**

Anodized aluminum alloy

**Junction Box**

IP 65, with bypass diodes

**Connector**

MC4 compatible

**Output Cables**

TUV + length 900mm, 4mm<sup>2</sup>

**Weight**

22 kg

**100 % EL tested**

**Poly crystalline (± 3 %)**

**Cell Type**

**Mono crystalline (+ 3 %)**

### PERFORMANCE AT STANDARD TEST CONDITIONS (STC: 1000 W/m<sup>2</sup>, 25°C, AM 1.5)

#### TSPP 300 W

24  
8.5A  
43V  
7.8A  
38.3V  
> 17 %  
>15 %  
+/- 3 %

#### Maximum Power at STC (Pmax)

Nominal Voltage  
Short Circuit Current (ISC)  
Open Circuit Voltage (Voc)  
Maximum Power Current (Imp)  
Maximum Power Voltage (Vmpp)  
Encapsulated Cell Efficiency  
Module Efficiency  
Power Tolerance

#### TSPM 300 W

24  
8.72A  
44.2V  
8.1A  
34.4V  
> 17.5 %  
>15.5 %  
+/- 3 %


### PERFORMANCE AT NORMAL OPERATING CELL TEMPERATURE (NOCT: 800W/m<sup>2</sup>, 47±3°C, AM 1.5)

220W  
7.2A  
40V  
6.7A  
32.6V

Maximum Power (Pmax) Watt  
Short Circuit Current (ISC) Amp  
Open Circuit Voltage (Voc) Volts  
Max Power Current (Imp) Amp  
Max Power Voltage (Vmpp) Volts  
Weight


220W  
7.34A  
14.9V  
6.82A  
32.2V

The typical relative change in module efficiency at an irradiance of 200W/m in relation to 1000W/M (both at 25°C and AM 1.5 spectrum) is less than 6%

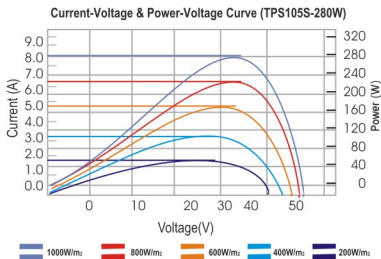

TEMPERATURE CHARACTERISTICS		SYSTEM INTEGRATION PARAMETERS	
Nominal Operating Cell Temperature (NOCT)	47±3 C	Maximum system voltage	DC 1000V
Temperature Coefficient of Pmax (γ)	-0.47%/K	Maximum Series Fuse	16A
Temperature Coefficient of Voc (B)	-0.36%/K	Maximum reverse current	21.5A
Temperature Coefficient of Isc (G)	0.05%/K	Increased snowload acc. To IEC 61215	5400Pa/m
		Operating Temperature	-40+85 C
		Number of bypass diodes	6

Specs subject to change without notice

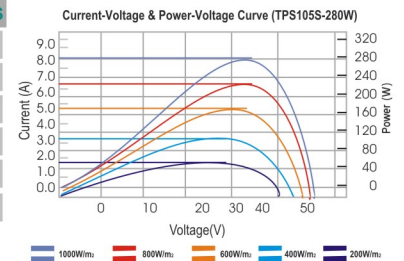

Conformance : IEC 61215 , 61730

Rev 1 28 mar 15