



**LEAPTON**  
SOLAR

# LP156x156-P-72

## Rated Power 320-330W




Monocrystalline

Polycrystalline



Dimension: mm

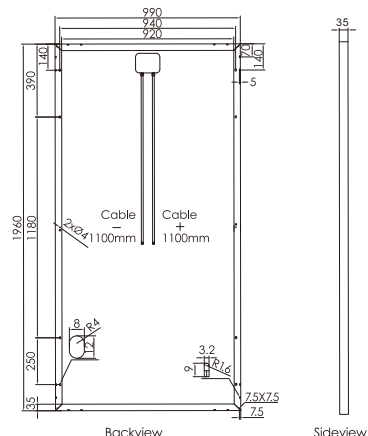

Product Series	LP156*156-P-72		
Maximum Rated Power	320W	325W	330W
Open Circuit Voltage	45.1V	45.2V	45.2V
Short Circuit Current	9.31A	9.43A	9.55A
Maximum Power Voltage	36.6V	36.7V	36.8V
Maximum Power Current	8.75A	8.86A	8.97A
Module Efficiency	16.5%	16.7%	17.0%

Product Characteristics

Weight	21.5kg	Junction Box	IP67
Module Size	1960*990*40mm	Frame	Aluminum Alloy
Cell Amount	72 pcs of polycrystalline	Cable	4mm <sup>2</sup> , Length 100mm
Cell Size	156*156mm	Connection	(Compatible with) MC4
Maximum System Voltage	1000V	Application Level	Class A

Temperature Characteristics

NOCT	45±0.5°C	Output Tolerance	0~+3%
Temperature Coefficient of Short Circuit Current	+0.0462%/°C	Operating Temperature	-40°C~+85°C
Temperature Coefficient of Open Circuit Voltage	-0.3121%/°C	Wind Load / Snow Load	2400pa/5400pa
Temperature Coefficient of Maximum Power	-0.4336%/°C	Fuse Current	15A

Maximum Ratings



- 15-Year 90% Maximum Output
- 25-Year 80% Maximum Output



J-PEC Product



- Salt Spray Certificate
- IEC 61701 (Salt Mist Corrosion Test)





TÜV PID



PID Test Certificate



Output 320W~330W

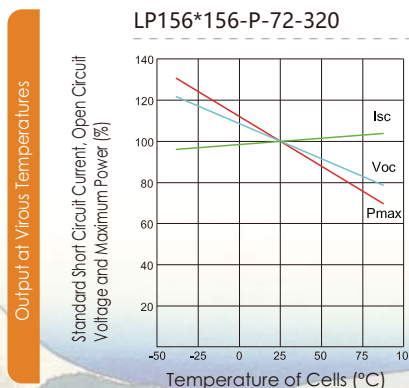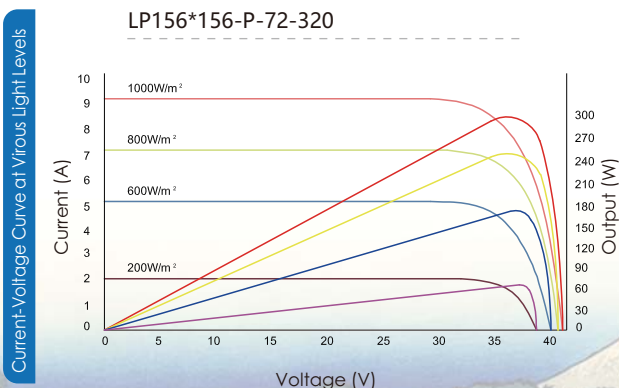

**Leapton Energy Co., Ltd.**  
HEAD OFFICE, Kobe, JAPAN  
Tosei Bldg.6F, 1-2-1, Aioi-cho,  
Chuo-ku, Kobe-shi,  
Hyogo 650-0025, Japan

**PV System Manufacturer**  
**Leapton Solar (Changshu) Co., Ltd.**  
No.55, Sunshine Avenue, Changshu City,  
Jiangsu, China

www.leaptonpv.com  
info@leaptonenergy.com