












### Products Characteristics

-  Widely using of the most popular and mature type of modules for on-grid system.
-  Leading manufacturing technology in PV industry, strictly control the quality of raw materials and the process of producing.
-  100% EL inspection, ensures modules are defects free.
-  Cells binned by current to improve module performance.
-  Anti-reflection glass. Not only to increase the light absorption, but also to make the module has the funtion of self-cleaning in water environment, effectively reducing the power loss caused by dust.
-  Outstanding performance in low-light irradiance environments.
-  Excellent mechanical load resistance: Certified to withstand high wind load(2400pa) and snow loads (5400pa).
-  High performance of salt and ammonia resistance.
-  Positive power tolerance: 0~+5%.

### Warranty


- 10years products warranty.
- 10 years 90%、25 years 80% output power warranty.

### PRODUCTS CERTIFICATION

- ISO9001:2008: ISO Quality management systems
- IEC61215、IEC61730
- CQC Certificate
- CE Certificate
- SGS-TUVCertificate

### Raw materials and mechanical para.

	6P-230 6P-240
Solar cell dimension (mm)	Poly crystalline 156X117
Solar cell quantity (pcs)	6X12=72
Module dimension (mm)	1480X992X35/40
Module weight (kg)	16.2/16.5
Glass	3.2mm Tempered Glass
Encapsulation	EVA
Backsheet	Multilayer composite
Aluminium-frame	Silver/black Anodized aluminium alloy
Junction box	IP65/IP67
Cable	4mm <sup>2</sup> ,900mm
Connector	MC4 andMC4 Compatible
Package configuration	30/26pcs/pallet

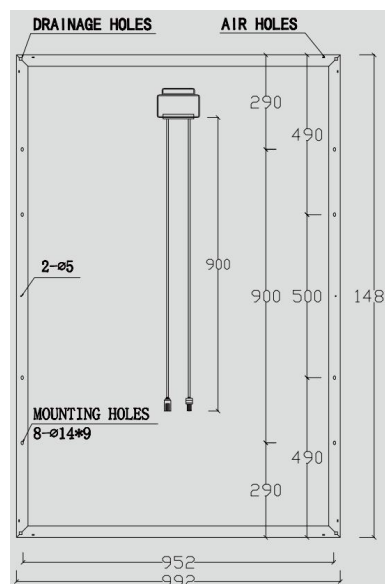

Engineering Drawing (Back Side)

## Performance parameters

	6P-230 6P-240
Maximum system voltage	1000V
Operating temperature	-45℃~+80℃
Maximum series fuse	10A
Maximum static load, front side (e.x. snow, wind)	5400PA
Maximum static load, back side (e.x. wind)	2400PA
Application grade	Class A

## Electrical parameters (Standard test condition)

	6P-230	6P-240
Rated max. Power(Wp)	230W	240W
Power tolerance	0~+5%	
Cell efficiency	17.60%	18.30%
Open circuit voltage	44.8V	45.9V
Max. power voltage (Vmp)	35.0V	36.8V
Short circuit current (Isc)	7.02A	6.92A
Max. power current(Imp)	6.58A	6.53A
Temperature coefficient of Isc	+0.06%	
Temperature coefficient of Voc	-0.33%	
Temperature coefficient of Pmp	-0.45%	
Rated max. Power(Wp)	Irradiance: 1000W/M2,、 Cell temperature 25℃、 Spectrum AM: AM1.5	

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.