


# JST MODULE

## JST170P(40) 170W



High conversion efficiency  
High module efficiency to guarantee power output.

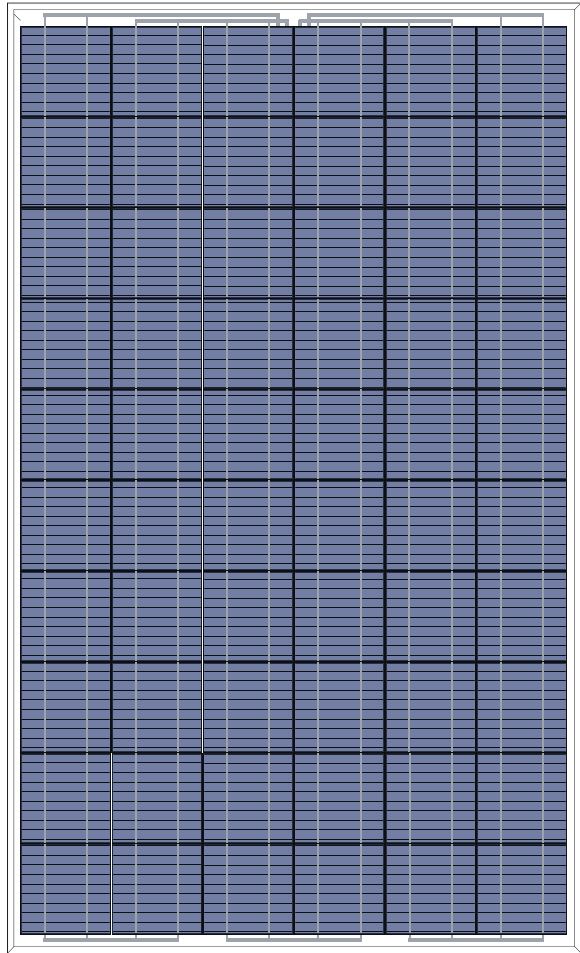

0 to +5W positive tolerance  
Detailed information in Electrical Specifications.




Self-cleaning glass  
Coating glass for self-cleaning, reduce surface dust.



48-hour response service



Outstanding low irradiation performance  
Excellent module efficiency even in the weak light conditions, such as morning or cloudy.

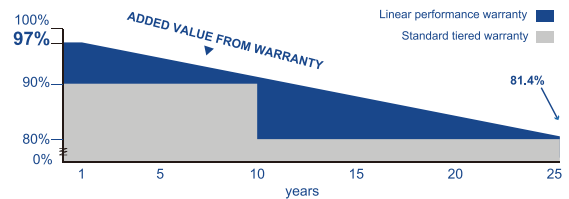

Excellent loading capability  
2400Pa wind loads, 5400Pa snow loads.



25-year performance warranty

10-year warranty on materials and workmanship

IEC 61215 Ed.2  
IEC 61730  
UL 1703



## ELECTRICAL DATA

Model Type	JST170P(40)
Peak Power (Pmax)	170W
Module Efficiency	15.4%
Maximum Power Voltage (Vmp)	20.8V
Maximum Power Current (Imp)	8.18A
Open Circuit Voltage (Voc)	24.5V
Short Circuit Current (Isc)	8.59A
Power Tolerance	0 to +5%
Maximum System Voltage	1000V
Nominal Operating Cell Temperature	44.4±2°C
Maximum Series Fuse Rating	15A

## MECHANICAL DATA

Cell Type	156×156mm
Number of Cells	40 (10×4)
Weight	13kg
Dimension	1640×670×35mm
Max Load	5400 Pascals IP67
Junction Box	rated MC4
Connector	Compatible PV
Wire Type	Wire


## TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.04% /°C
Temp. Coeff. of Voc (TK Voc)	-0.34% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.44% /°C

## PACKING MANNER


Container	20' GP	40' GP
Pieces per Pallet	30	30
Pieces per Container	600	1200

## PHYSICAL CHARACTERISTICS

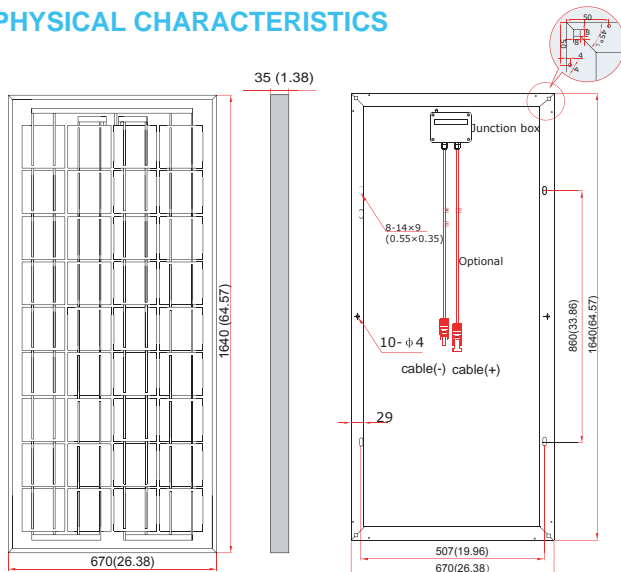


## ELECTRICAL CHARACTERISTICS


Current-Voltage & Power-Voltage Curve (AM1.5, Cell Temperature 25°C)

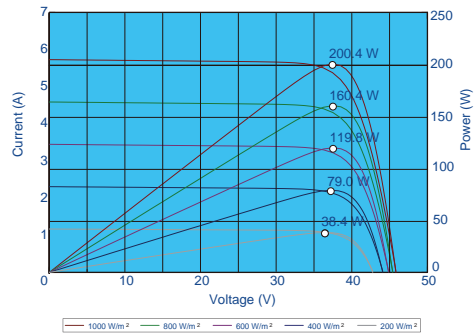

Temperature Dependence of Isc, Voc and Pmax



Irradiance Dependence of Isc, Voc and Pmax (Cell Temperature: 25°C)

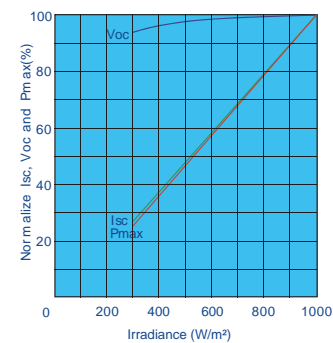

Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum. Please contact support@jusolar.com for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.