

MONO-CRYSTALLINE MODULE

270/275/280/285/290/295/300M60



GREENERGY POWER
SOLAR TECHNOLOGY



High conversion efficiency



Extremely environmental testing



Salt mist corrosion resistant



IP67 Junction box



Strong compressive strength



Fire test approved



PID Resistant



3% positive tolerance




Series of internal harsh tests



Authorised photovoltaic certificates



Linear performance warranty

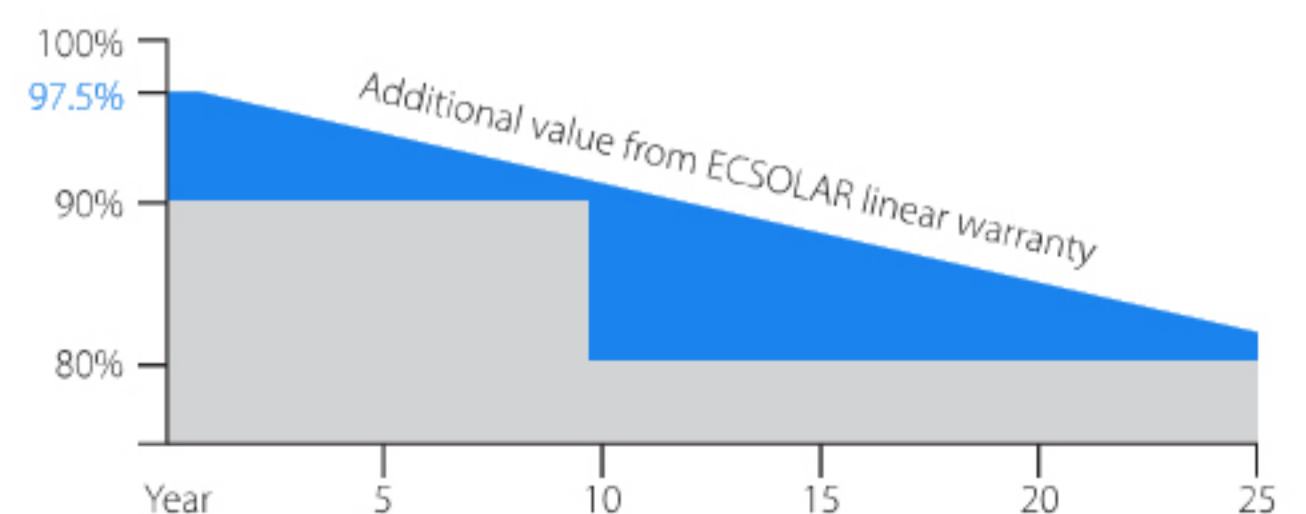

Electrical Characteristics under STC*

Module Type	270M60	275M60	280M60	285M60	290M60	295M60	300M60
Maximum Power-P _{max} (Wp)	270	275	280	285	290	295	300
Voltage at Maximum Power-V _{mp} (V)	31.5	31.9	32.3	32.7	33.1	33.5	33.9
Current at Maximum Power-I _{mp} (A)	8.57	8.62	8.67	8.72	8.76	8.81	8.86
Open Circuit Voltage-V _{oc} (V)	38.5	38.9	39.3	39.8	40.2	40.6	41.0
Short Circuit Current-I _{sc} (A)	9.35	9.43	9.50	9.55	9.62	9.75	9.83
Module Efficiency-η _m (%)	16.6	16.9	17.1	17.5	17.8	18.0	18.3
Power Tolerance (%)	0/+3	0/+3	0/+3	0/+3	0/+3	0/+3	0/+3

Mechanical Characteristics

Cell Type	Mono-crystalline	156×156 mm (6 inches)
Number of Cells	60 (6×10)	
Dimension	1640×992×35 mm (64.57×39.06×1.38 inches)	
Weight	20.0 kg	
Front Glass	Low Iron Tempered Glass	
Encapsulant	EVA	
Frame	Anodized Aluminum Alloy	

Temperature Characteristics

NOCT*	45±2°C
Temperature Coefficient of P _{max} (%)	-0.40/°C
Temperature Coefficient of V _{oc} (%)	-0.31/°C
Temperature Coefficient of I _{sc} (%)	0.04/°C

Maximum System Ratings





Operating Temperature	-40°C to +80°C
Maximum System Voltage	1000V DC
Maximum Series Fuse Rating	16A

Warranty

12 years product warranty

12 years warranty on 90% power output

25 years warranty on 80% power output

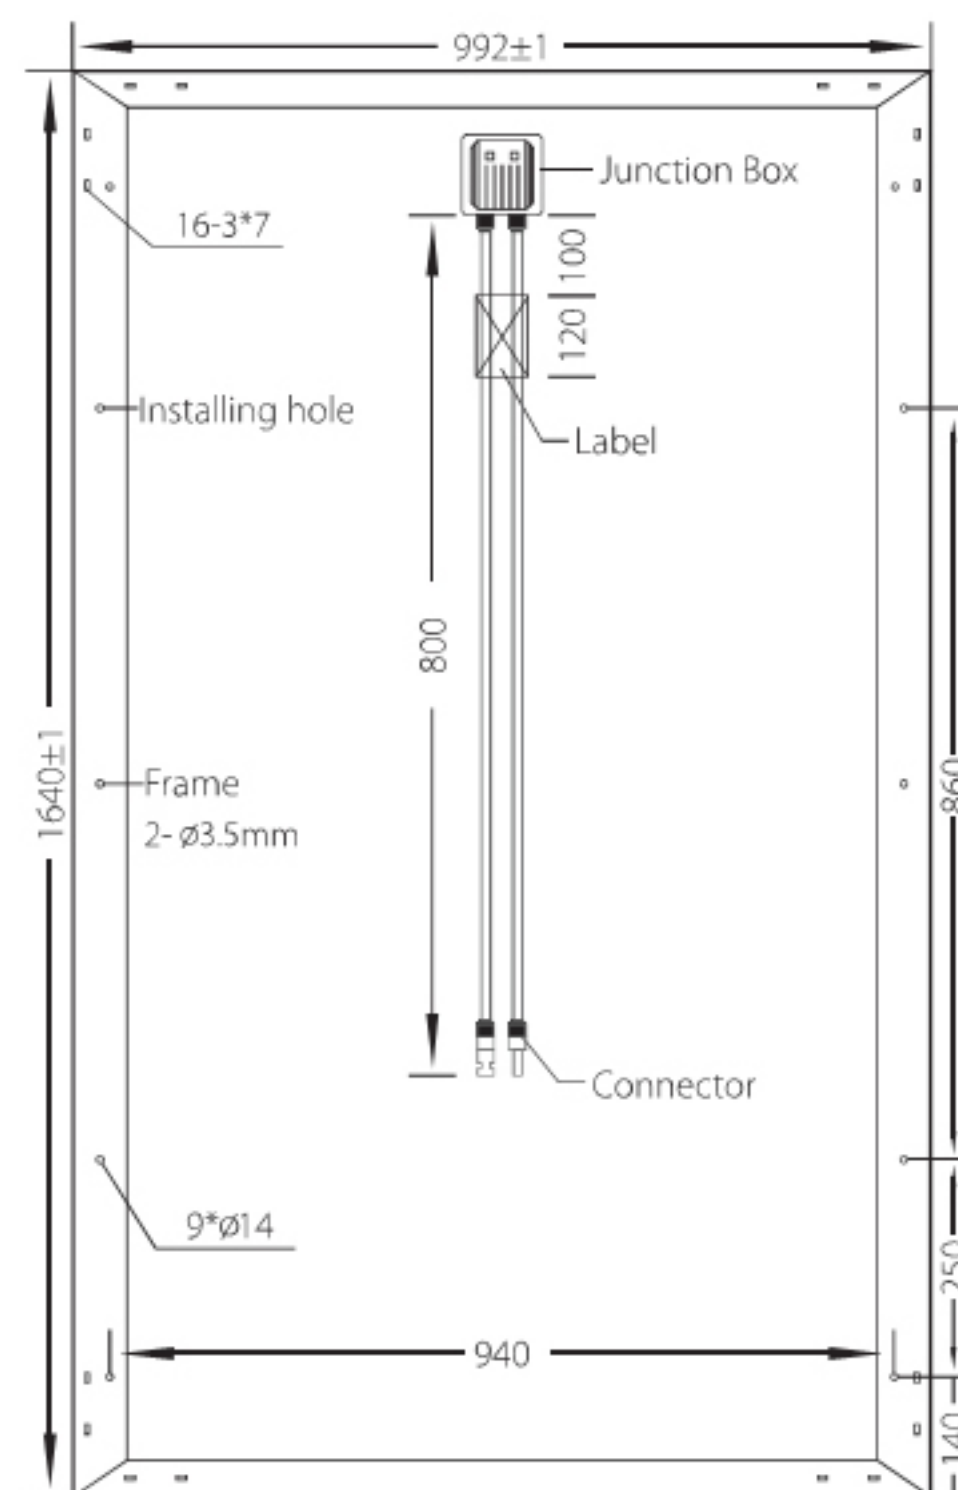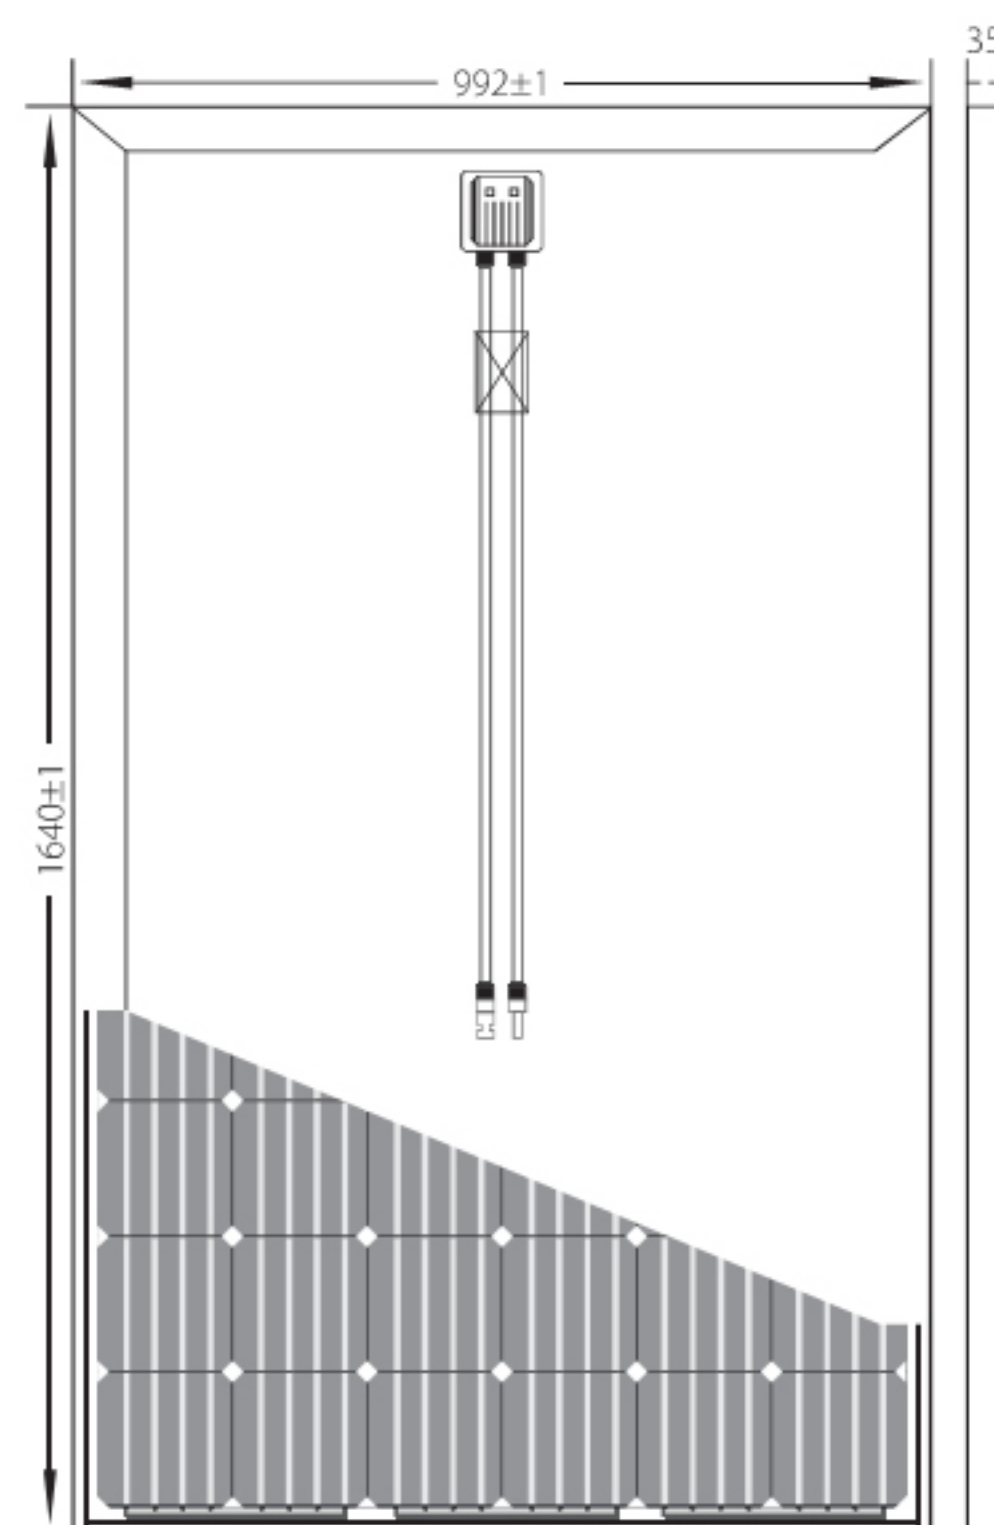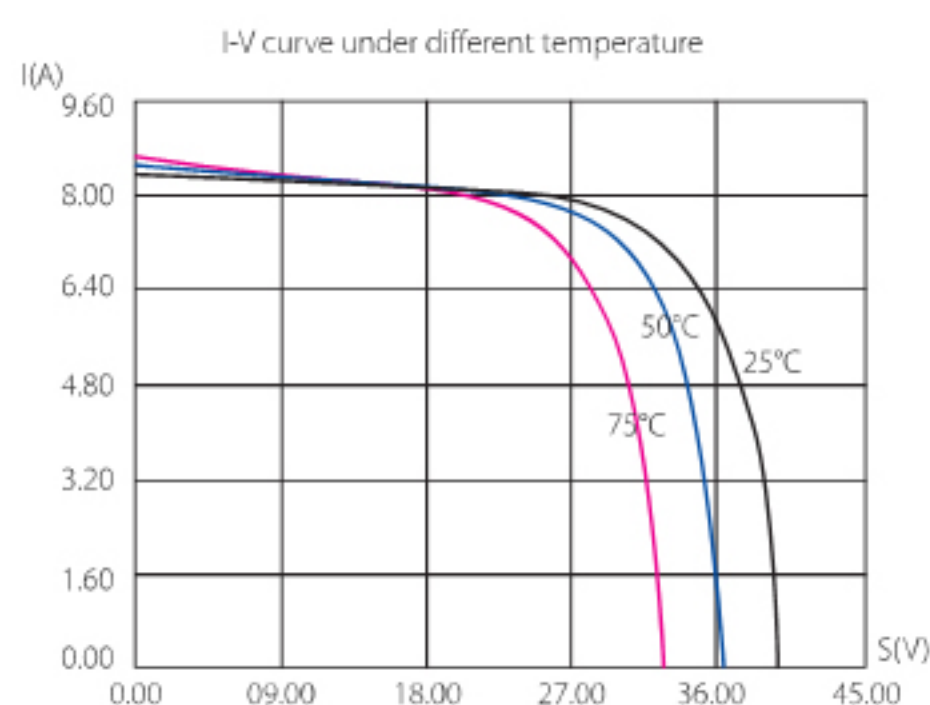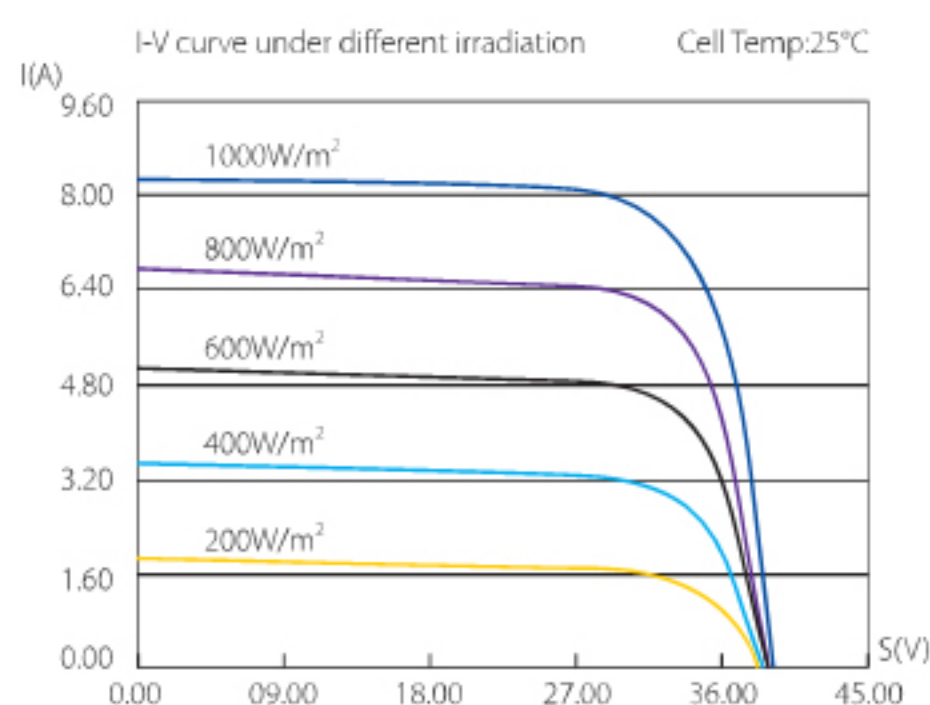

*STC (Standard Testing Conditions): Irradiance 1000 W/m², cell temperature 25 °C, AM=1.5
ambient temperature 20 °C, wind speed 1 m/s

*NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m²,
The specifications in this datasheet are subjected to change without prior notice