




## PHOTOVOLTAIC SOLAR ENERGY

### MONOCRYSTALLINE MODULES - SI-ESF-M-BIPV-SM-M125-96

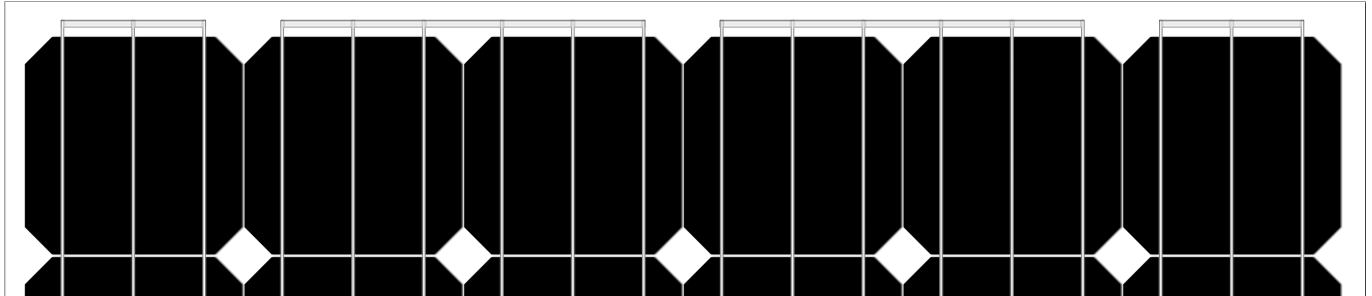

Solar Innova uses the latest materials to manufacture photovoltaic modules. Our modules are ideal for any application that uses the photoelectric effect as a clean energy source because of its minimal chemical pollution and no noise pollution. Thanks to its design, can be integrated easily into any installation.

The front of the module contains a tempered solar glass with high transmissivity, low reflectivity and low iron content.

These PV modules use high-efficiency monocrystalline silicon cells (the cells are made of a single crystal of high purity silicon) to transform the energy of sunlight into electric energy. Each cell is electrically rated to optimize the behavior of the module.

The cell circuit is laminated using EVA (Ethylene-Vinyl Acetate) as a encapsulant in combination with a tempered glass on its front and a plastic polymer (Tedlar) on the back which provides complete protection and seals against environmental agents and electrical insulation.

The junction boxes with IP67, are made from high temperature resistant plastics and containing terminals, connection terminals and protection diodes (by-pass). These modules are supplied with symmetric lengths of cable, with a diameter of copper section of 4 mm and an extremely low contact resistance, all designed to achieve the minimum voltage drop losses.

Our modules comply with all safety requirements not only flexibility but also double insulation and high resistance to UV rays, all are suitable for use in outdoor applications. The design of these modules makes their integration in both industrial and residential buildings (one of the most emerging sectors in the photovoltaic market), and other infrastructure, simple and aesthetic.


#### WARRANTIES

Our manufacturing plants have been prepared in accordance with the ISO 9001:2008, ISO 14001:2004 and OHSAS 18001:2007.

We have quality control divided into three elements:

- ✓ Regular inspections allow us to guarantee the quality of the raw material.
- ✓ Quality control in the process of our manufacturing procedures.
- ✓ Quality control of finished products, we conduct through inspections and tests of reliability and performance.

Our PV modules are certified by internationally recognized laboratories and are proof of our strict adherence to international safety standards, long term performance and overall quality of products.

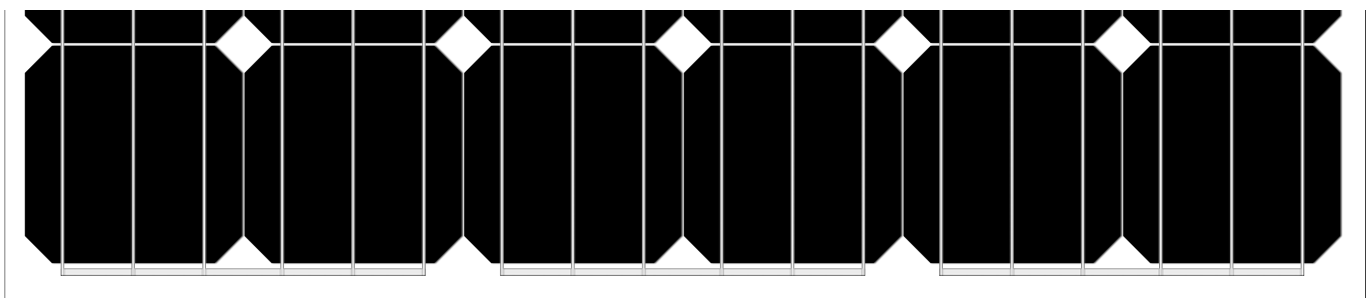










## PHOTOVOLTAIC SOLAR ENERGY

### MONOCRYSTALLINE MODULES - SI-ESF-M-BIPV-SM-M125-96

ELECTRICAL CHARACTERISTICS (STC)						
Maximum power (Pmpp)	Wp	255	260	265	270	275
Tolerance	Wp	0 ~ + 5				
Voltage at maximum power (Vmpp)	Volts	48.91	48.99	49.07	49.46	49.54
Current at maximum power (Impp)	Amperes	5.21	5.31	5.40	5.46	5.55
Open circuit voltage (Voc)	Volts	60.38	60.48	60.58	61.06	61.16
Short circuit current (Isc)	Amperes	5.59	5.63	5.64	5.72	5.75
Maximum system Voltage (Vsyst)	Volts	600 (UL) / 1,000 (IEC)				
Diodes (By-pass)	Quantity	4				
Maximum series fuse	Amperes	15				
Efficiency (ηm)	%	15.10	15.39	15.69	15.99	16.28
Form Factor	%	≥ 73				

<b>STC:</b>	 Irradiance: 1.000 W/m <sup>2</sup>	 Module temperature: 25° C	 Air quality: 1,5
-------------	--	---	--

ELECTRICAL CHARACTERISTICS (NOCT)						
Maximum power (Pmpp)	Wp	188	182	185	199	202
Voltage at maximum power (Vmpp)	Volts	44.53	44.61	45.2	45.5	45.8
Current at maximum power (Impp)	Amperes	4.23	4.31	4.31	4.38	4.42
Open circuit voltage (Voc)	Volts	55.19	55.28	55.3	55.4	55.5
Short circuit current (Isc)	Amperes	4.53	4.57	4.62	4.67	4.71

<b>NOCT:</b>	 Irradiance: 800 W/m <sup>2</sup>	 Air temperature: 20° C	 Air quality: 1,5	 Wind speed: 1 m/s
--------------	---	---	---	--

MECHANICAL CHARACTERISTICS			
<b>Size</b>	Height	1,574 mm	61.97 inches
	Width	1,063 mm	41.85 inches
	Thickness	30 mm	1.18 inches
<b>Weight</b>	Net	20 kg	44.1 lbs
<b>Front</b>	Material	High transmissivity toughened glass	
	Thickness	4 ± 0.2 mm	0.16 inches
<b>Cells</b>	Type	Monocrystalline	
	Quantity	8 x 12 units	
	Size	125 x 125 mm	5 inches
Serial connection	Quantity	96 units	
Parallel connection	Quantity	1 unit	
<b>Encapsulation</b>	Material	EVA	
	Grosor	0.50 ± 0.03 mm	0.020 ± 0.0012 inches
<b>Lámina posterior</b>	Material	TPT	
	Grosor	0.32 ± 0.03 mm	0.013 ± 0.0012 inches
<b>Junction box</b>	Material	PVC	
	Protección	IP67	
	Aislamiento	Frente a humedad e inclemencias meteorológicas	
<b>Cables</b>	Type	Polarized and symmetric in length	
	Length	900 mm	35.4 inches
	Section	4 mm <sup>2</sup>	0.006 inches <sup>2</sup>
	Features	Low contact resistance Minimal losses for voltage drop	
<b>Connectors</b>	Material	PVC	
	Tipo	MC4	
	Protección	IP67	

THERMAL CHARACTERISTICS		
Temperature coefficient of short circuit current α (Icc)	%/° C	+ 0.0814
Temperature coefficient of open circuit voltage β (Voc)	%/° C	- 0.3910
Temperature coefficient of maximum power γ (Pmpp)	%/° C	- 0.5141
Temperature coefficient of current at maximum power (Impp)	%/° C	+ 0.10
Temperature coefficient of voltage at maximum power (Vmpp)	%/° C	- 0.38
NOCT (Nominal Operating Cell Temperature)	° C	+ 47 ± 2



## PHOTOVOLTAIC SOLAR ENERGY MONOCRYSTALLINE MODULES - SI-ESF-M-BIPV-SM-M125-96

TOLERANCES				
<b>Working temperature</b>	° C	° F	- 40 ~ + 85	- 40 ~ + 185
<b>Dielectric Isolation Voltage</b>	Volts		3.000	
<b>Relative humidity</b>	%		0 ~ 100	
<b>Wind resistance</b>	m/s		60	
	kg/m <sup>2</sup>	Pa	245	2.400
	lbs/feet <sup>2</sup>		491,56	
<b>Mechanical load-bearing capacity</b>	kg/m <sup>2</sup>	Pa	551	5.400 (IEC)
	lbs/feet <sup>2</sup>	Pa	75,2	3.600 (UL)
	Clase		C	
<b>Fire resistance</b>	Clase		C	








MEASUREMENTS PERFORMED IN ACCORDANCE WITH STANDARD TEST METHODS EN 60904-3 AND ASTM E1036, CORRECTED TO STANDARD TEST CONDITIONS (STC)		
<b>Air quality/Spectral distribution</b>	AM	1.5 ASTM G173-03e1 (2,008)
<b>Luminous intensity/Radiation</b>	W/m <sup>2</sup>	1,000
<b>Cell temperature</b>	° C	25

MEASUREMENTS PERFORMED IN SOLAR SIMULATOR	
<b>Class</b>	AAA (according to IEC 60904-4)
<b>Power measurement uncertainty is within</b>	± 3 %

STRUCTURAL CHARACTERISTICS	
<b>Cells</b>	High efficiency cells with anti-reflective layer of Silicon Nitride.
<b>Electric conductors</b>	Flat Copper (Cu) bath in a Tin (Sn) and Silver (Ag) alloy, which improves weldability.
<b>Welding</b>	Of cells and drivers in sections for stress relief.
<b>Laminate</b>	Composed of ultra-clear tempered glass on the front, thermostable, EVA encapsulant embedding cells and electrical insulation on the rear formed by a tedlar and polyester compound.
<b>Junction box</b>	Hoses and quick connectors with anti-error. Include bypass diodes, interchangeable thanks to the wiring system has no welds, all electrical contacts are made by pressure, thus avoiding the possibility of cold welding.

CHARACTERISTICS OF WORK	
- The power of solar cells vary in the output of the production process. The different power specifications of these modules reflect this dispersion.	
- Cells during the early months of light exposure, may experience a degradation photonics could decrease the value of the maximum power of the module up to 3 %.	
- The cells, in normal, operating conditions, reach a temperature above the standard measurement conditions of the laboratory. The NOCT is a quantitative measure of the increase. NOCT measurement is performed under the following conditions: radiation of 0.8 kW/m <sup>2</sup> , temperature 20° C and wind speed of 1 m/s.	
- The electrical data reflects typical values of the modules and laminates as measured at the output terminals at the end of the manufacturing process.	

WARRANTIES		
<b>Manufacturing defects</b>	Years	12
<b>Performance</b>	Minimal Rated Power %/Years	90 % at 10 years, 80 % at 25 years.

CERTIFICATES			
			
			

**FRONT SURFACE**

3 mm tempered glass high optical transmittance

**EVA (Ethyl Vinyl Acetate)** resin solidification

**SOLAR INNOVA GREEN TECHNOLOGY, S.L.**  
N.I.F.: ESB-54.627.278  
Paseo de los Molinos, 12, Bajo  
03660 - NOVELDA (Alicante) SPAIN  
Tel./Fax: +34 965075767  
E-mail: info@solarinnova.net  
Website: [www.solarinnova.net](http://www.solarinnova.net)

**SILICON CELLS**  
Monocrystalline



**PHOTOVOLTAIC SOLAR ENERGY**


**MONOCRYSTALLINE MODULES - SI-ESF-M-BIPV-SM-M125-96**

Monocrystalline silicon rear layer for module protection


**JUNCTION BOX**

With quick connectors and double insulated flexible cable with bypass diodes


**FRONT FORWARD**

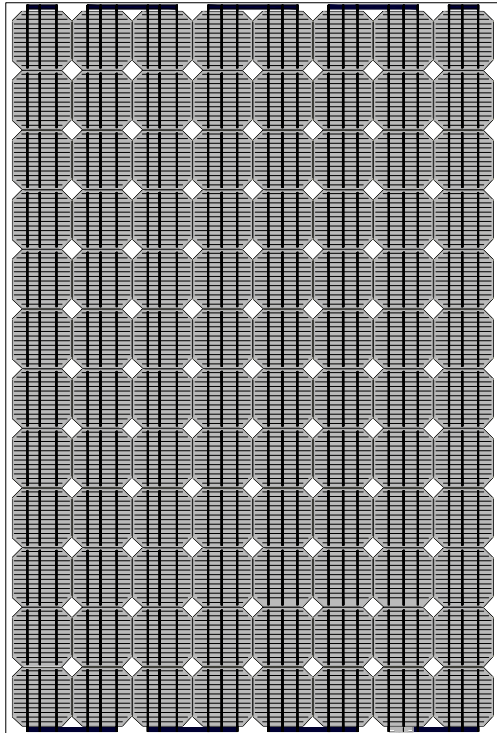

**FRONT REAR**

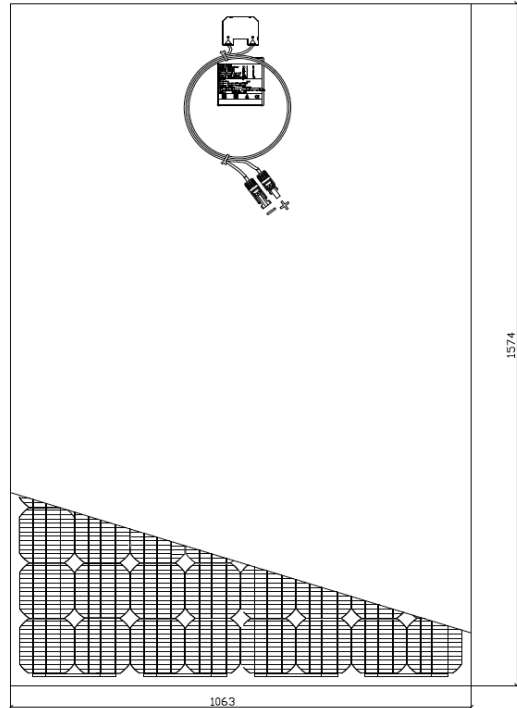

**CONSTRUCTION DETAILS**

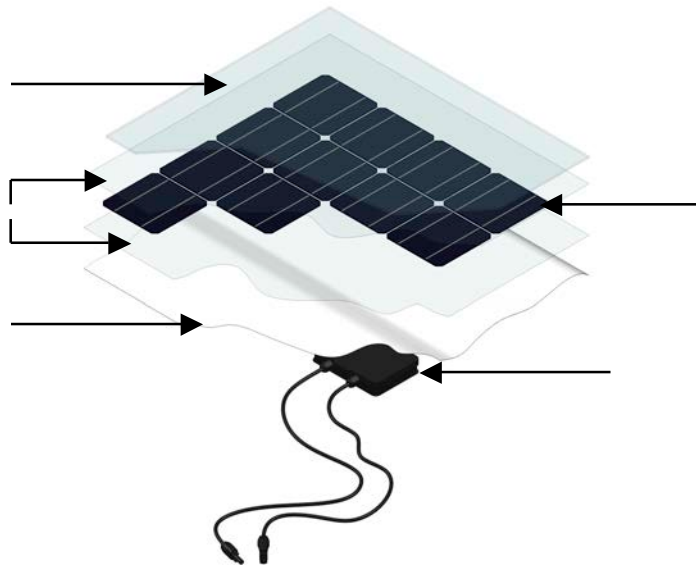




# PHOTOVOLTAIC SOLAR ENERGY

## MONOCRYSTALLINE MODULES - SI-ESF-M-BIPV-SM-M125-96

### PERFORMANCE

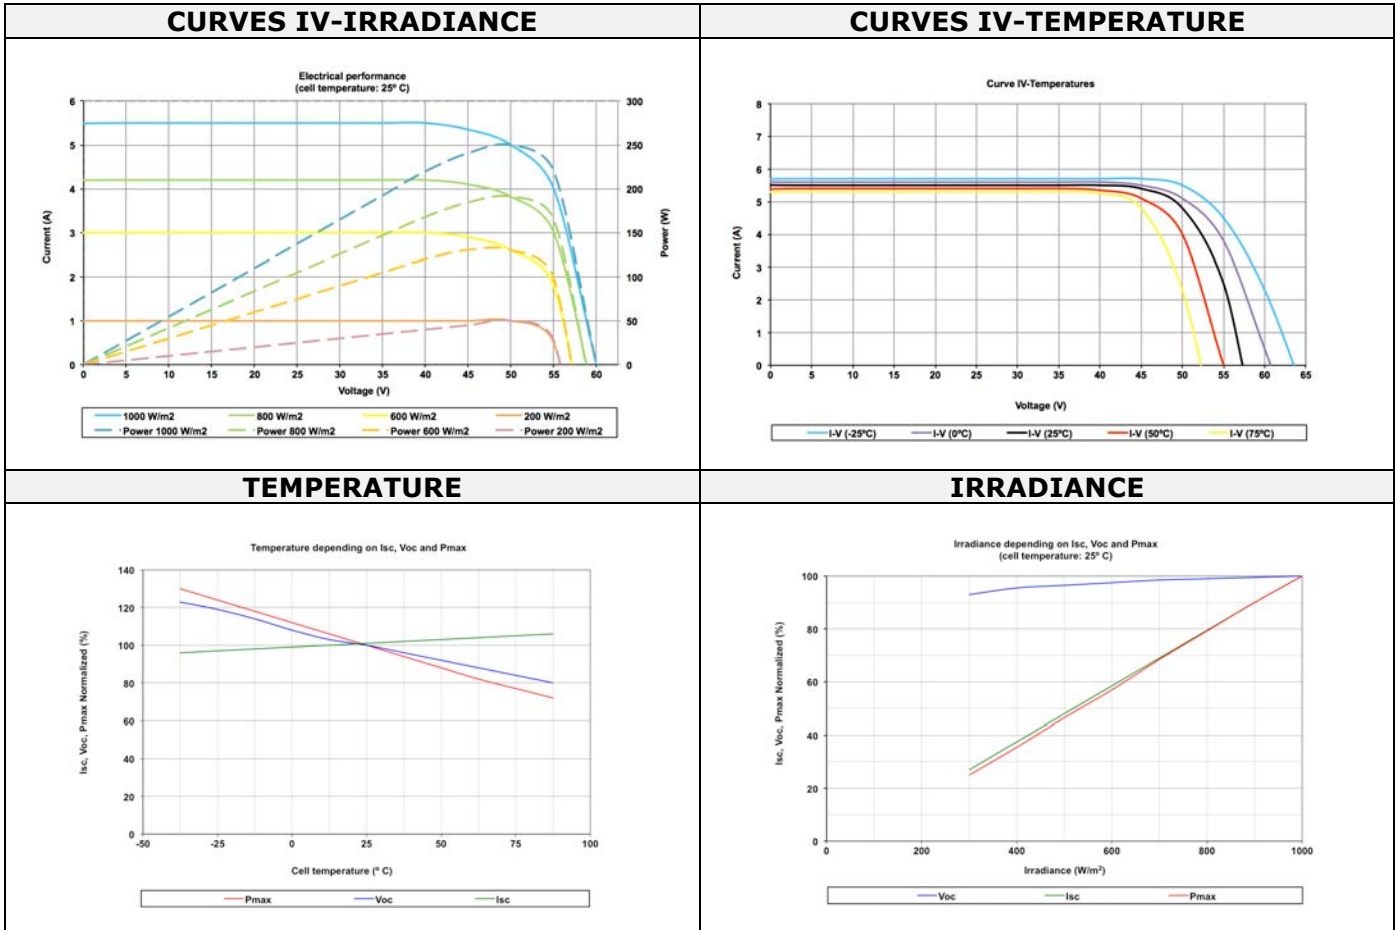



## PHOTOVOLTAIC SOLAR ENERGY MONOCRYSTALLINE MODULES - SI-ESF-M-BIPV-SM-M125-96

### PACKAGING AND TRANSPORT



<b>Box</b> (each big pallet add 16 pieces solar modules by 8 boxes)	Size	1,625 x 1,150 x 2,110 mm (20' GP)
		1,625 x 1,150 x 2,500 mm (40' HC)
	Panels	38 pcs/pallet (20' GP)
		44 pcs/pallet (40' HC)
Weight (Empty)	145 kg (20' GP)	
	240 kg (40' HC)	



<b>Container 20' GP</b>	Size	5.898 x 2.352 x 2.393 m	20' x 8' x 8'6"
	Panels	228 pcs	
	Pallets	6 pcs	
	Weight (Net)	25 kg x 38 pcs + 145 kg = 1,095 kg	
	Weight (Gross)	1,095 kg x 6 pallets = 6,570 kg	



<b>Container 40' GP</b>	Size	12.025 x 2.352 x 2.393 m	40' x 8' x 8'6"
	Panels	616 pcs	
	Pallets	14 pcs	
	Weight (Net)	25 kg x 44 pcs + 240 kg = 1,340 kg	
	Weight (Gross)	1,340 kg x 14 pallets = 18,760 kg	