



AC-260P/156-60S  
 AC-265P/156-60S  
 AC-270P/156-60S

www.axitecsolar.us

**AXITEC**<sup>®</sup>  
 high quality german solar brand

## AXIpower BLK

60 cell/polycrystalline photovoltaic modules  
 High performance photovoltaic modules



German engineered – made for America



12 years manufacturer's warranty  
 Two more years than industry standard



Highest performance due to specifically selected technologies and materials



Positive power tolerance from 0-5 Wp  
 Higher guaranteed yield



Snow load of up to 113 psf  
 Stable module for a long life in extreme conditions



100 % electroluminescence inspection  
 Micro crack and hotspot free modules



Axitec-Soft-Grip-Seam aluminum frame  
 Higher stability and easier handling




High quality junction box and connector system for a longer life time



Fig. similar 60P156USA160530A

### Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance
- Warrants around 6 % more than the market standard

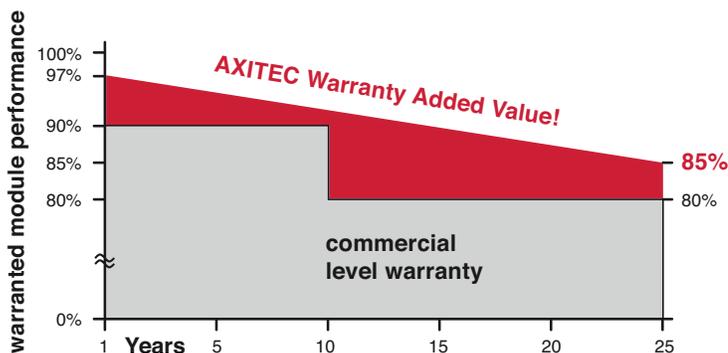

Module Fire Performance:  
 TYPE 1 (UL 1703)  
 CLASS C (IEC61730)

Distributed by:

**Electrical data** (at standard conditions (STC) irradiance 1000 watt/m<sup>2</sup>, spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P <sub>mpp</sub>	Nominal voltage U <sub>mpp</sub>	Nominal current I <sub>mpp</sub>	Short circuit current I <sub>sc</sub>	Open circuit voltage U <sub>oc</sub>	Module conversion efficiency
AC-260P/156-60S	260 Wp	30.92 V	8.43 A	9.01 A	38.00 V	15.98 %
AC-265P/156-60S	265 Wp	30.98 V	8.60 A	9.20 A	38.16 V	16.29 %
AC-270P/156-60S	270 Wp	31.12 V	8.71 A	9.25 A	38.21 V	16.60 %

## Design



Frontside	0.13 inch (3.2 mm) hardened, low-reflection white glass
Cells	60 polycrystalline high efficiency cells 6 inch (156 x 156 mm)
Backside	Composite film
Frame	1.38 inch (35 mm) black anodized aluminium frame

## Mechanical data

L x W x H	64.57 x 39.06 x 1.38 inch (1640 x 992 x 35 mm)
Weight	39.68 lbs (18.0 kg) with frame

## Power connection

Socket	Protection Class IP65 (3 bypass diodes)
Wire	43.3 inch, AWG 11
Plug-in system	Plug/socket IP67

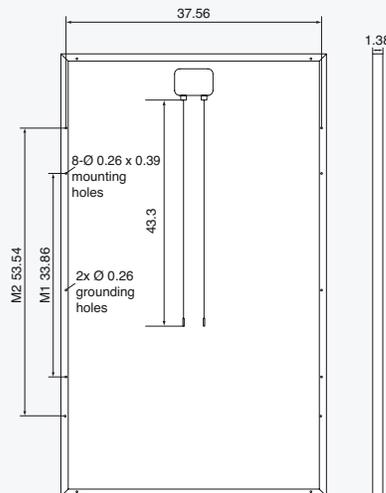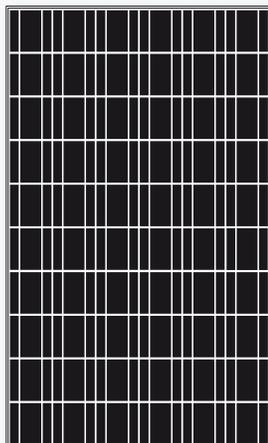

All dimensions in inch

## Limit values

System voltage	1000 VDC (UL) 1000 VDC (IEC)
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	113 PSF
Reverse current feed IR	15.0 A
Permissible operating temperature	-40°C to 85°C / -40F to 185F

(No external voltages greater than V<sub>o</sub> may be applied to the module)

\* NOCT, irradiance 800 W/m<sup>2</sup>; AM 1,5; wind speed 1 m/s; Temperature 20°C

## Temperature coefficients

Voltage U <sub>oc</sub>	-0.30 %/K
Current I <sub>sc</sub>	0.04 %/K
Output P <sub>mpp</sub>	-0.42 %/K

## Low-light performance (Example for AC-260P/156-60S)

I-U characteristic curve	Current I <sub>pp</sub>	Voltage U <sub>pp</sub>
200 W/m <sup>2</sup>	1.70 A	30.10 V
400 W/m <sup>2</sup>	3.42 A	30.15 V
600 W/m <sup>2</sup>	5.41 A	30.52 V
800 W/m <sup>2</sup>	6.82 A	30.86 V
1000 W/m <sup>2</sup>	8.43 A	30.92 V

## Packaging

Module pieces per pallet	30
Module pieces per HC-container	840