

X-SMART Monocrystalline

265 - 270 - 275 - 280 - 285 Wp



4 Busbar cells



Plus only Tolerance -0/+5 Wp



Designed and engineered in Italy




Product warranty



The new X-SMART combines the quality of our photovoltaic modules of Sunerg solar with the versatility Interchangeable system of Tigo. The TS4 universal platform enables plug-and-play functionality for any solar module. The base provides a single interface that can be matched with one of several electronic covers to address a range of functions and budgets. Tigo has expanded its smart module platform to provide five levels of customization with an universal base and a range of covers.

LINEAR WARRANTY

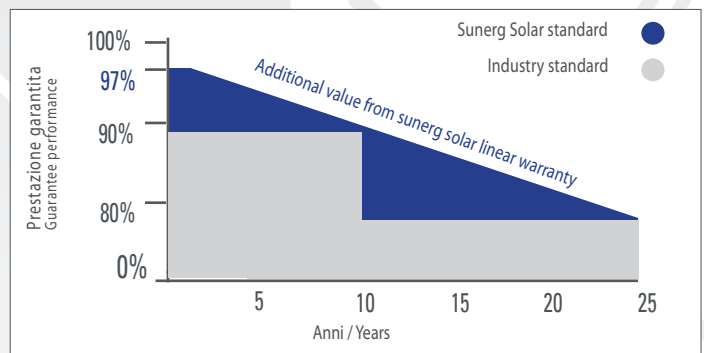

*Vedi termini di garanzia - look warranty terms - voir les conditions de garantie

CORRESPOND TO

IEC 61215-ed2 | EN 61730-1 | EN 61730-2 | UNI 9177 Reaction to Fire: Class 1 PV CYCLE | CE |

UNI EN ISO 9001:2008
UNI EN ISO 14001:2004
UNI EN BS OHSAS 18001:2007

| Quality management system
| Standards for environmental management system
| International standards for occupational health and safety

ELECTRICAL DATA (STC)		XM460265I+35 TS4-**	XM460270I+35 TS4-**	XM460275I+35 TS4-**	XM460280I+35 TS4-**	XM460285I+35 TS4-**
Open circuit voltage	(Voc)	37.86 V	38.04 V	38.16 V	38.22 V	38.94 V
Voltage at Pmax	(Vmp)	32.22 V	32.34 V	32.46 V	32.58 V	32.52 V
Short-circuit current	(Isc)	8.82 A	8.92 A	9.02 A	9.15 V	9.45 A
Current at Pmax.	(Imp)	8.23 A	8.40 A	8.50 A	8.62 V	8.76 A
Peak Power (Pmax) Tolerance -0/+5 Wp*		265 Wp	270 Wp	275 Wp	280 Wp	285 Wp
Module Efficiency		16.27%	16.57%	16.88%	17.19%	17.50 %
Maximum voltage		1000 V DC	1000 V DC	1000 V DC	1000 V DC	1000 V DC
Maximum series fuse rating		16A	16A	16A	16A	16A
Operating Temperature		-40°C - +85°C	-40°C - +85°C	-40°C - +85°C	-40°C - +85°C	-40°C - +85°C

**D / M / S / O / L

Tolerans elektrisk mätning 3%

*** STC** (Standard test conditions)

Irradiance 1000 w/m², module temperature 25°C, AM= 1.5

TEMPERATURE COEFFICIENT

NOCT	46±2 °C
Pmax Temperature coefficient	-0.38% / °C
Voc Temperature coefficient	-0.36% / °C
Isc Temperature coefficient	0.07% / °C


MECHANICAL CHARACTERISTIC

Hail test	25 mm - 23 m/s
Max load long side	5920 Pa
Number of cells	60 (156.75 mm x 156.75 mm) Type: Mono
Weight	18.4 Kg

GENERAL INFORMATION

Front glass	Tempered AR Coated glass, 3.2 mm
Frame	Anodized aluminum alloy (Ral 9005 black coating for IB+35 series)
Junction Box	Mod. Tigo TS4 IP65/IP67 NEMA 3R
Output cables	Solar cable PV1-F; 4mm ² ; MC4 connectors

PRODUCT

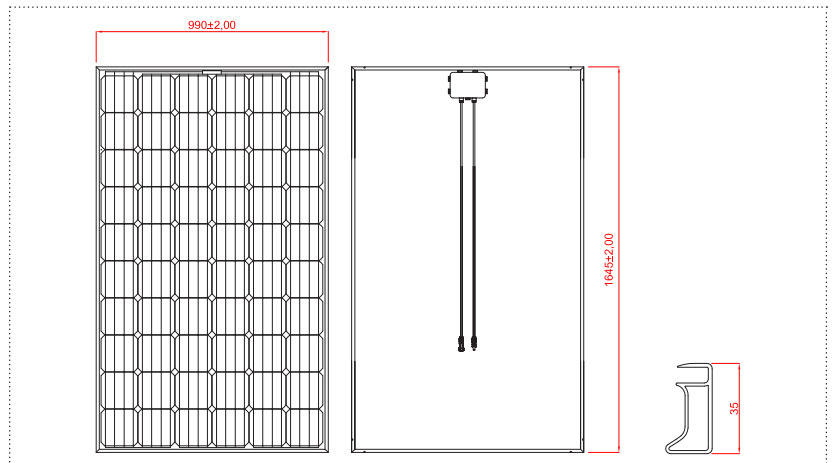

Sunerg srl We reserve the right to make changes to product specifications without notice
The technical data of the module, even though they are entered with extreme care, may contain errors or inaccuracies not attributable to Sunerg Solar S.r.l.