


260-275_w

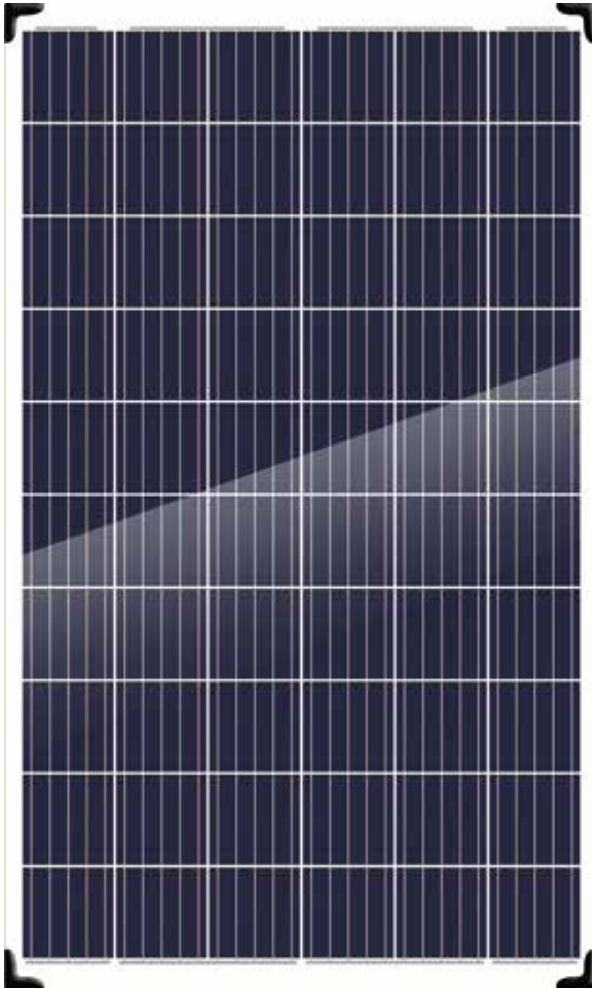

MANAGEMENT SYSTEM

ISO 9001: Quality management system

ISO 14001: Standard for environmental management system

OHSAS 18001: International standard for occupational health and safety assessment system


PRODUCT CERTIFICATES



INSURANCE



WARRANTY

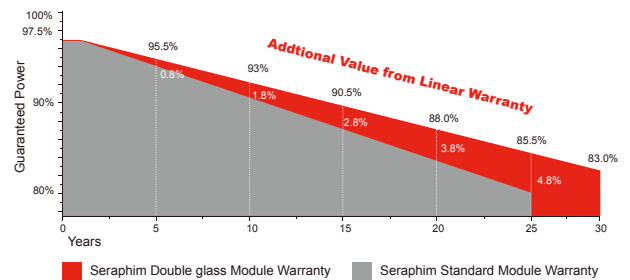

10 YEARS Guarantee on product material and workmanship

30 YEARS linear power output warranty



Excellent fire resistance increases safety class.



Frameless structure cuts off the current leakage circuit to avoid PID.



Special encapsulate material, glass as substrate avoids hydrolysis effect, and stable dual-glass structure effectively avoids snail trail.



Solution to withstand harsh environment, glass instead of back sheet as substrate with better resistant to sand, salt mist, ammonia, acid, alkali, etc.



Less maintenance due to frameless structure with less soiling and snow accumulation.




Lower power degradation, more power yield, more returns

SRP-6PB-DG SERIES 6 INCH 60 CELLS

Electrical Characteristics

Module Type	SRP-260-6PB-DG		SRP-265-6PB-DG		SRP-270-6PB-DG		SRP-275-6PB-DG	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power -P _{mp} (W)	260	192	265	196	270	200	275	204
Open Circuit Voltage -V _{oc} (V)	38.30	35.30	38.60	35.60	38.90	35.80	39.20	36.10
Short Circuit Current -I _{sc} (A)	8.69	7.02	8.79	7.10	8.87	7.19	8.96	7.24
Maximum Power Voltage -V _{mp} (V)	31.00	29.10	31.30	29.30	31.60	29.60	31.80	29.80
Maximum Power Current -I _{mp} (A)	8.39	6.62	8.48	6.70	8.56	6.76	8.65	6.85
Module Efficiency STC-η _m (%)	15.81		16.11		16.42		16.72	
Power Tolerance (W)	(0,+4.99)							
Maximum System Voltage (V)	1500 (TÜV)							
Maximum Series Fuse Rating (A)	15							

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5
 NOCT: Irradiance 800 W/m² ambient temperature 20°C wind speed :1m/s;
 Power measurement tolerance: +/-3%

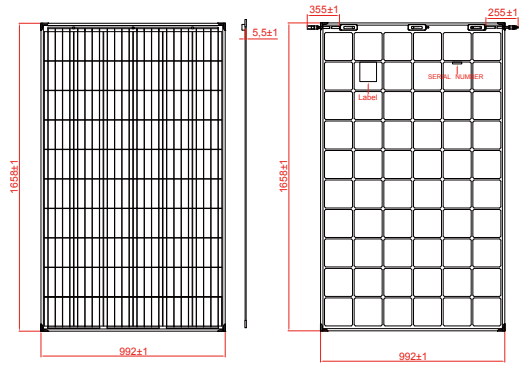

* All Dimensions in mm

* The above drawing is a graphical representation of the product.
 For engineering quality drawings please contact SERAPHIM.

Temperature Characteristics

Pmax Temperature Coefficient	-0.41 %/°C
Voc Temperature Coefficient	-0.32 %/°C
Isc Temperature Coefficient	+0.05 %/°C



Packing Configuration

	1658 x 992 x 5.5mm	
Container	20'GP	40'GP
Pieces per Pallet	36	36
Pallets per Container	12	26
Pieces per Container	432	936

Mechanical Specifications

External Dimensions	1658 x 992 x 5.5mm
Weight	20 kg
Solar Cells	poly crystalline 156.75 x156.75 mm (60pcs)
Front Glass	2.0 mm AR tempered glass, low iron
Back Glass	2.0 mm tempered glass, low iron
Junction Box	IP67
Output Cables	4.0 mm ² , cable length: 255mm(+), 355mm(-)or customized
Connector	MC4 Compatible
Mechanical Load	2400Pa

I-V Curve (SRP-260-6PB-DG)

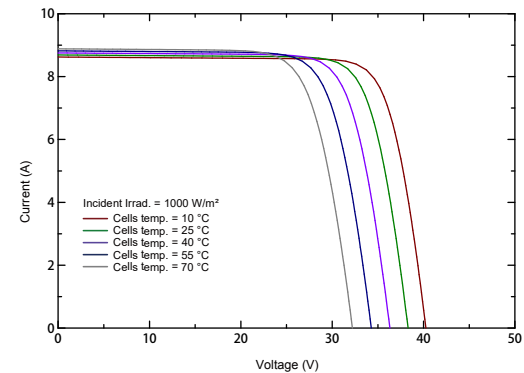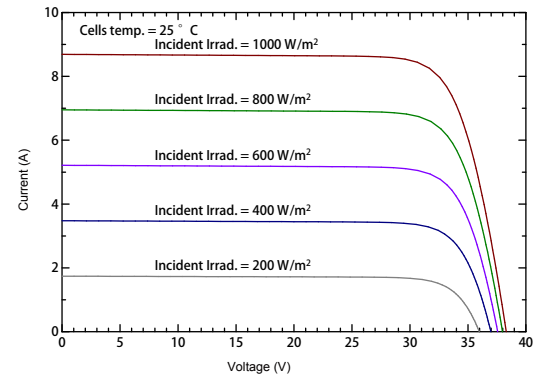

Specifications are subject to change without further notification SRP-DS-EN-2018V2.0 © Copyright 2018Seraphim