




**EXCELLENT GLASS/GLASS M54
brilliant frameless**

MONOCRYSTALLINE 245–260 WP



Transparency and Performance

The cell matrix is optimized for light transmission and maximum performance

The optimized cell matrix enables a light transparency of 19%

Optimizes electricity production whilst preserving daylight diffusion for agricultural greenhouses and buildings

Perfect architectural integration and control of natural light contribution for verandas, pergolas, awnings and carports

30 years linear performance guarantee
20 years product guarantee

Optional Total Care for the entire system

EXCELLENT GLASS/GLASS 245 | 250 | 255 | 260 M54

brilliant frameless

Performance STC

Under standard Test Conditions STC:
1000 W/m²; spectrum AM 1.5;
Cell temperature 25°C
Measurement tolerance STC:
P_{mpp} ±3%; I_{sc} ±10%; U_{oc} ±10%





Nominal Power P _{mpp} (Wp)	245	250	255	260
Open Circuit Voltage U _{oc} (V)	34,73	34,98	35,18	35,36
Voltage U _{mpp} (V)	27,98	28,25	28,50	28,71
Short Circuit Current I _{sc} (A)	9,29	9,37	9,46	9,53
Current I _{mpp} (A)	8,76	8,85	8,95	9,06
Efficiency η (%)	14,6	14,9	15,2	15,5

Reduction of module efficiency at reduction from 1000 W/m² to 200 W/m²: 1,4% ± 0,8% (relative)

Performance NMOT

Nominal operating temperature of module
800 W/m², NMOT, AM 1.5

Nominal Power P _{mpp} (Wp)	190	194	198	202
Open Circuit Voltage U _{oc} (V)	32,25	32,48	32,67	32,83
Voltage U _{mpp} (V)	27,17	27,43	27,67	27,87
Short Circuit Current I _{sc} (A)	7,52	7,58	7,65	7,71
Current I _{mpp} (A)	7,00	7,07	7,15	7,24

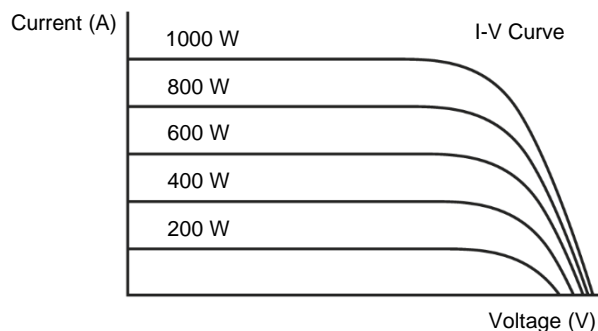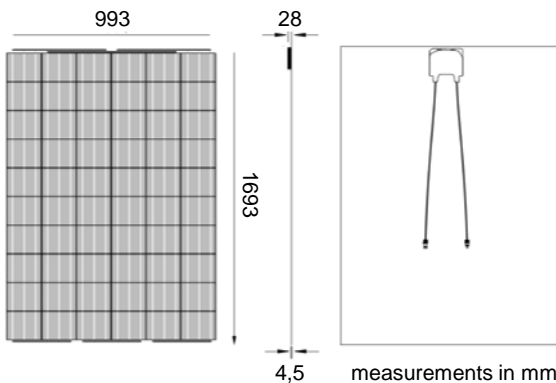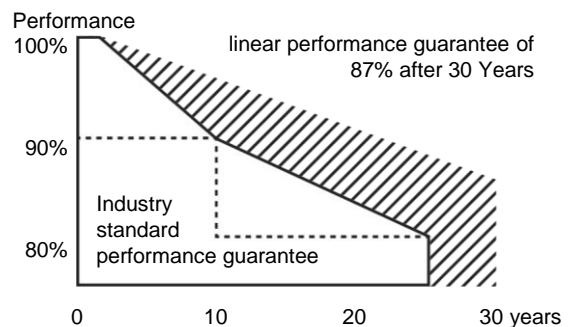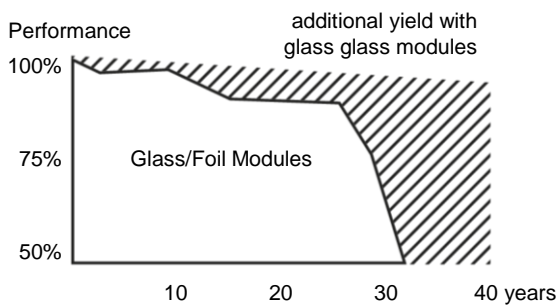

Other Technical Specification

Max. system voltage	1000 V
Weight	20.0 ± 0.5 kg
Reverse Current Load IR	15 A
Junction box	IP 67 with 3 bypass diodes
Connectors	IP 67, MC4
Fire rating	class C
Operating temperature	-40°C ... +85°C
Design load: snow	1.600 Pa *
Max test load	2.400 Pa
Design load: wind	1.600 Pa *
Max test load	2.400 Pa

* safety factor 1.5

Thermal Properties

TC P _{mpp}	-0.41 %/K
TC U _{oc}	-0.31 %/K
TC I _{sc}	0.045 %/K
NMOT	45 +/- 2 °C

Material Used

No. of cells	54 cells
Type of cells	monocrystalline
Front	hardened solar glass
Frame	n/a
Frame height	n/a

