



156 SERIES POLYCRYSTALLINE

SOLAR MODULE: 205 W, 210 W, 215 W, 220 W, 225 W, 230 W, 235 W, 240 W, 245 W

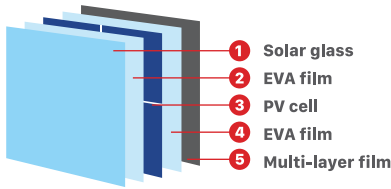


PERFORMANCE


Electrical Performance at 25°C, AM1.5

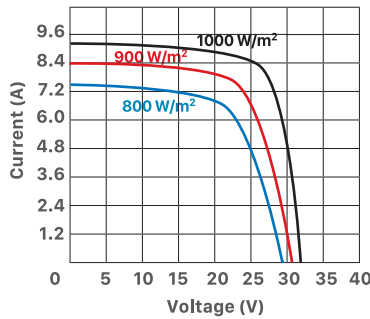

Temperature Dependence of Isc, Voc & Pm at 1000 W/m², AM1.5

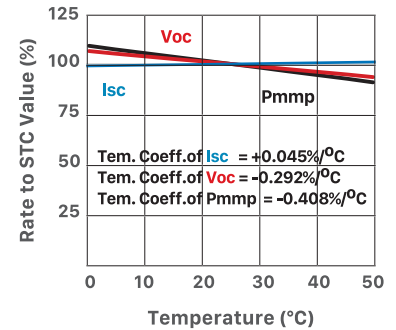

STRUCTURE

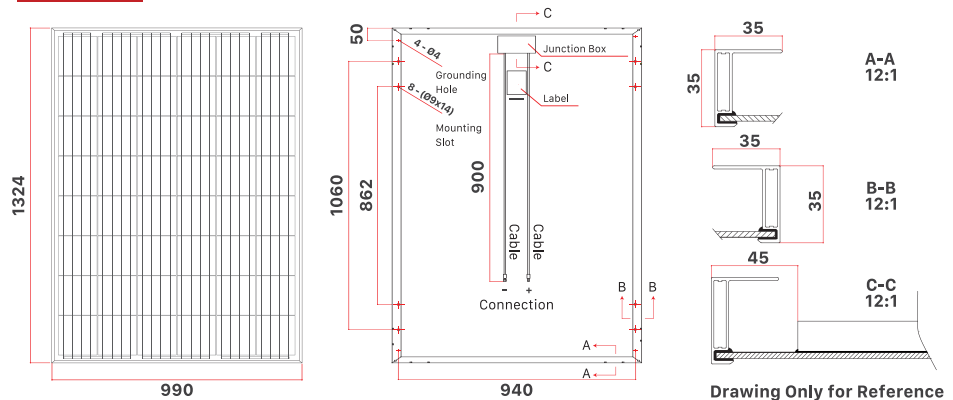

ELECTRICAL CHARACTERISTICS STC

	IR205P-48	IR210P-48	IR215P-48	IR220P-48	IR225P-48	IR230P-48	IR235P-48	IR240P-48	IR245P-48
Maximum Power (Pmax)	205 W	210 W	215 W	220 W	225 W	230 W	235 W	240 W	245 W
Power Tolerance	0 ~ 3%	0 ~ 3%	0 ~ 3%	0 ~ 3%	0 ~ 3%	0 ~ 3%	0 ~ 3%	0 ~ 3%	0 ~ 3%
Module Efficiency	15.6%	16.0%	16.4%	16.8%	17.2%	17.6%	17.9%	18.3%	18.7%
Maximum Power Current (Imp)	8.30 A	8.36 A	8.44 A	8.60 A	8.74 A	8.88 A	9.03 A	9.20 A	9.36 A
Maximum Power Voltage (Vmp)	24.70 V	25.13 V	25.48 V	25.59 V	25.75 V	25.91 V	26.03 V	26.09 V	26.18 V
Short Circuit Current (Isc)	8.80 A	8.86 A	8.95 A	9.12 A	9.24 A	9.37 A	9.52 A	9.72 A	9.88 A
Open Circuit Voltage (Voc)	30.63 V	31.16 V	31.60 V	31.73 V	31.90 V	32.08 V	32.17 V	32.27 V	32.40 V

Values at Standard Test Conditions (STC: Air Mass AM 1.5, Irradiance 1000 W/m², Cell Temperature 25°C)

ELECTRICAL CHARACTERISTICS NOCT

	IR205P-48	IR210P-48	IR215P-48	IR220P-48	IR225P-48	IR230P-48	IR235P-48	IR240P-48	IR245P-48
Maximum Power (Pmax)	148.00 W	151.00 W	155.00 W	161.00 W	164.00 W	168.00 W	172.00 W	175.00 W	179.00 W
Maximum Power Current (Imp)	6.56 A	6.60 A	6.67 A	6.84 A	6.92 A	7.02 A	7.15 A	7.25 A	7.37 A
Maximum Power Voltage (Vmp)	22.57 V	22.88 V	23.24 V	23.54 V	23.70 V	23.94 V	24.06 V	24.14 V	24.30 V
Short Circuit Current (Isc)	7.04 A	7.09 A	7.16 A	7.30 A	7.38 A	7.46 A	7.60 A	7.74 A	7.84 A
Open Circuit Voltage (Voc)	28.18 V	28.67 V	29.07 V	29.22 V	29.30 V	29.48 V	29.60 V	29.68 V	29.78 V

Values at Nominal Operating Cell Temperature

(NOCT: Wind Speed 1m/s, Irradiance 800 W/m², Cell Temperature 45°C, Ambient Temperature 20°C)

MECHANICAL CHARACTERISTICS

Cell Type	156.75 x 156.75 mm Polycrystalline, 48 (6x8) pcs in series
Solar glass	High Transmission, Low Iron, Tempered Glass with Anti Reflecting Coating
Frame	Anodized Aluminum Alloy type 6063 - T5
Junction Box	Rated current ≥ 15 A, IP ≥ 67, TUV & UL, 3 diodes
Dimension	1324 x 990 x 35 mm
Output Cable	4 mm² (EU)/12 AWG (US), 900 mm
Weight	15 kg
Installation hole Location	See Drawing Above

PACKING INFORMATION

Container	20' GP	40' GP	40' HQ
Pallets per Container	16	32	32
Pieces per Container	480	960	1024

MAXIMUM RATINGS

Operating Temperature	-40°C to +85°C
Maximum System Voltage	1500 VDC (IEC) / 1500 VDC (UL)
Maximum Series Fuse Rating	20 A (IEC) / 20 A (UL)
Application Class	Class A