



GCL-M3/60 GCL-M3/60H Monocrystalline Module 285-320W



320W

Maximum Power Output

19.4%

Maximum Module Efficiency


0~+5W

Power Output Guarantee

Cell Type



5BB



MBB



Ideal choice for large scale ground installation



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Special cutting and soldering technology leads to low hotspot risk



Sand blowing test, salt mist test and ammonia test passed to endure harsh environments



Optimized system performance due to module level current sorting



Highly transparent self-cleaning glass brings additional yield and easy maintenance


Company Introduction

GCL System Integration Technology Co. Ltd (002506 Shenzhen Stock) (GCL System) is part of GOLDEN CONCORD Group (GCL) which is an international energy company specializing in clean and sustainable power production. The group, founded in 1990 now employs 30,000 people.

GCL Delivers Reliable Performance Over Time

- World-class manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO9001:2008, ISO 14001: 2004 and OHSAS: 18001 2007
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing test: IEC 61701, IEC 62716, DIN EN 60068-2- 68)
- Long term reliability tests
- 2*100% EL inspection ensuring defect-free modules

Linear Performance Warranty

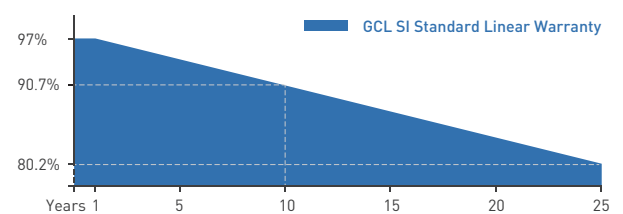

10 Years Product Warranty 25 Years Linear Power Warranty

* Please refer to GCL standard warranty for details

Additional Insurance Backed by Swiss RE



* Please refer to GCL for details

GCL-M3/60 GCL-M3/60H

GCL-Mercury Series Monocrystalline Module

285-320W

Electrical Specification (STC*)

Maximum Power	P _{max} (W)	285	290	295	300	305	310	315	320
Maximum Power Voltage	V _{mp} (V)	31.80	32.10	32.40	32.70	33.00	33.30	33.60	33.90
Maximum Power Current	I _{mp} (A)	8.96	9.04	9.11	9.17	9.24	9.31	9.38	9.44
Open Circuit Voltage	V _{oc} (V)	38.80	39.00	39.30	39.60	39.90	40.20	40.50	40.80
Short Circuit Current	I _{sc} (A)	9.37	9.42	9.47	9.53	9.59	9.67	9.74	9.81
Module Efficiency	(%)	17.3	17.6	17.9	18.2	18.5	18.8	19.1	19.4
Power Output Tolerance	(W)	0~+5							

* Irradiance 1000W/m², Module Temperature 25°C, Air Mass 1.5

Electrical Specification (NOCT*)

Maximum Power	P _{max} (W)	212.77	216.84	220.01	223.92	227.65	231.31	235.10	238.29
Maximum Power Voltage	V _{mp} (V)	29.80	30.20	30.60	30.80	31.10	31.30	31.60	31.90
Maximum Power Current	I _{mp} (A)	7.14	7.18	7.19	7.27	7.32	7.39	7.44	7.47
Open Circuit Voltage	V _{oc} (V)	36.20	36.30	36.60	36.90	37.10	37.40	37.70	37.90
Short Circuit Current	I _{sc} (A)	7.58	7.62	7.66	7.70	7.75	7.82	7.88	7.93

* Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Mechanical Data

Solar Cell Type	Mono 78.38x156.75mm
Number of Cells	120 Cells (6x20)
Dimensions of Module L*W*H (mm)	1665x992x35mm (65.55 x 39.05 x 1.38 inches)
Weight (kg)	18.8kg
Glass	High transparency solar glass 3.2mm (0.13 inches)
Backsheet	White
Frame	Silver, anodized aluminium alloy
J-Box	IP68 Rated
Cable	4.0mm ² (0.006 inches ²), 300mm (11.8 inches)
Number of diodes	3
Wind/ Snow Load	2400Pa/5400Pa*
Connector	MC4 Compatible

* For more details please check the installation manual of GCLSI

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	44±2°C
Temperature Coefficient of I _{sc}	+0.06%/°C
Temperature Coefficient of V _{oc}	-0.30%/°C
Temperature Coefficient of P _{MAX}	-0.38%/°C

Maximum Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1000V DC
	1500V DC -(H)
Max Series Fuse Rating	15A

Packaging Configuration

Module per box	30 pieces
Module per 40' container	780 pieces

Optional


Connector: Original MC4




Contact Us for More Information

website: en.gclsi.com email: gclsisales@gclsi.com


Module Dimension

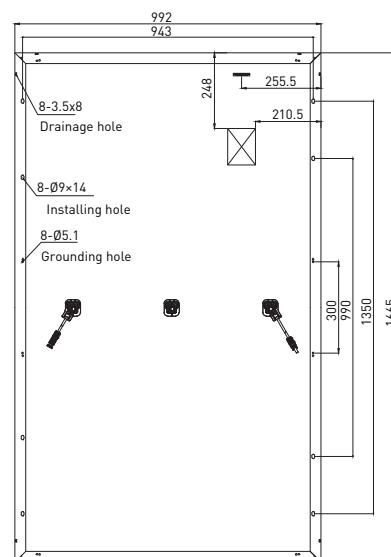


Back View



U-I Curve at Different Temperature (305W)

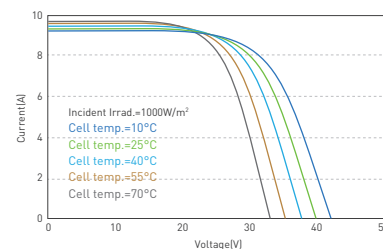

U-I/P-U Curve at Different Irradiation (305W)

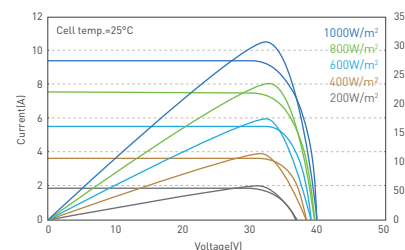

CAUTION: READ INSTALLATION MANUAL BEFORE USING THE PRODUCT