

Half-cell Monocrystal Solar Cell Modules
HTM290/295/300/305/310
MH-60

Reliable Quality

- 0~+3% positive tolerance output warranty
- EL full inspection for twice effectively eliminates defects of products
- Optimize module current profile, improve system-side power generation



Module Characteristics



5 Busbar Half-Cells

Innovative half-cutting cell technology, lower internal current, lower internal resistance loss



High Output Power

Output power is higher than the same type of conventional monocrystal module



Anti-PID Characteristics

Ensure large-scale production half-cell monocrystal module pass PID test



Hot-Spot Effect

Low hot spot temperature, higher safety performance



Load Capacity

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal)




Harsh Environment Adaptation




High salt mist and ammonia resistance certified by TUV NORD

Industry-leading Linear Quality Warranty


10-year material technology quality warranty•25-year linear quality warranty

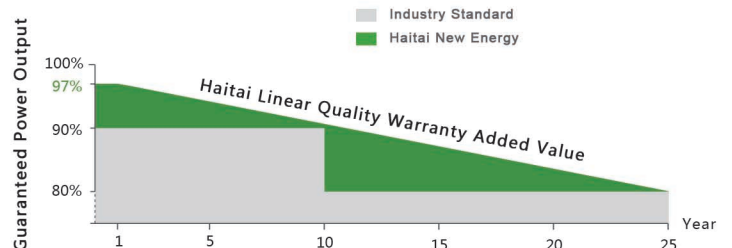

Module Dimensions(mm)

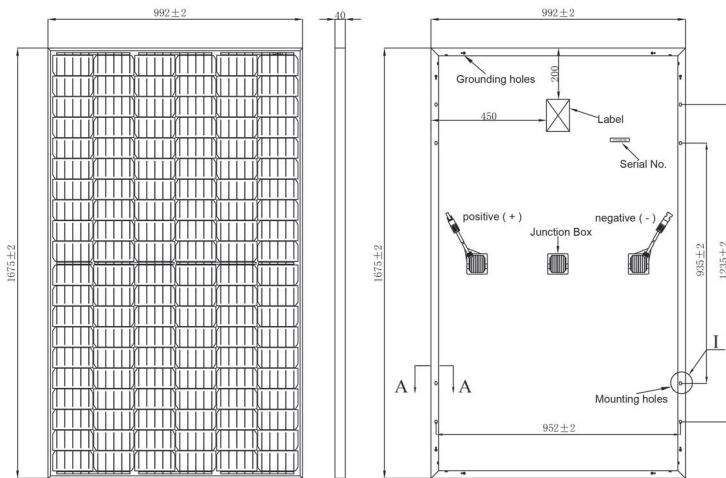

I-V Curve

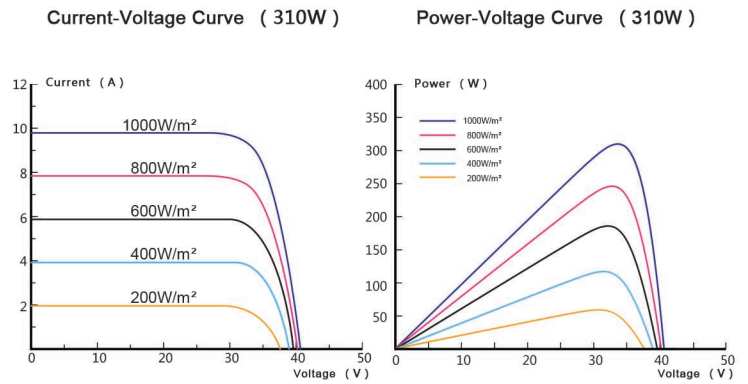

Structure Parameter

Cell Type	156.75x78.375mm Monocrystal
Cell Orientation	120 (6x20)
Module Dimensions	1675x992x40mm
Weight	19kg
Front Cover	3.2mm high transmittance, reinforced glass
Back Sheet	Anti-aging film
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP67
Cable	4.0mm ² photovoltaic special cable
Connector	MC4 compatible connector

Packaging Capacity

Each box capacity: 26 pcs
 Container load capacity per 40 feet: 728 pcs

Electric Characteristics

Module Type	HTM290MH-60		HTM295MH-60		HTM300MH-60		HTM305MH-60		HTM310MH-60	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Test Conditions										
Maximum Output Power(Pm)	290W	214W	295W	218W	300W	222W	305W	226W	310W	229W
Maximum Power Voltage(Vmp)	32.33V	29.89V	32.64V	30.20V	32.94V	30.50V	33.23V	30.80V	33.52V	30.95V
Maximum Power Current(Imp)	8.97A	7.16A	9.04A	7.22A	9.11A	7.28A	9.18A	7.34A	9.25A	7.40A
Open-circuit Voltage(Voc)	39.14V	36.44V	39.47V	36.88V	39.83V	37.20V	40.14V	37.61V	40.62V	37.84V
Short-circuit Current(Isc)	9.54A	7.63A	9.61A	7.70A	9.67A	7.77A	9.73A	7.84A	9.79A	7.91A
Module Conversion Efficiency(STC)	17.45%		17.75%		18.05%		18.36%		18.66%	
Maximum System Voltage	1000/1500V									
Operating Temperature	-40°C~+85°C									
Temperature Coefficient(Pm)	-0.393%/°C									
Temperature Coefficient(Voc)	-0.31%/°C									
Temperature Coefficient(Isc)	0.041%/°C									
Cell Rated Operating Temperature(NOCT)	45±2°C									

STC : ☀️ Light intensity1000W/m² 🌡️ Environment temperature : 25°C 🌫️ Air quality : AM1.5
 NOCT : ☀️ Light intensity800W/m² 🌡️ Environment temperature : 20°C 🌫️ Air quality : AM1.5 🌬️ Wind speed : 1m/s



Tangshan Haitai New Energy Technology Co., Ltd
 Add : No.88, Haomen Road, Yutian County, Tangshan City, Hebei Province, China
 Tel : +86-315-5051826
 Email : ht@htsolargroup.com