



SP100W-18V MONO & POLYCRYSTALLINE

Key features:



PID Free Module:
Anti-PID cell and encapsulation technology
Frameless module requires no module grounding which may PID



Higher Lifetime Power Yield:
<0.5% annual power degradation
30 year linear power warranty



Saving BOS Cost:
Designed for high voltage systems of up to 1500 VDC, saving BOS cost.



Improved Durability and Reliability:
Dual glass reduces micro-cracking, small trails, corrosion caused by moisture, sand, salt mist, acid, alkali, etc.





Less Maintenance Requirement:
Reduced soiling and snow coverage requires less maintenance and enhances fire safety



Aesthetically Pleasing Design:
white back sheet maximizes module efficiency up to 18.84%(60-poly max. output 275W); Transparent back sheet increases light transmission, ideal for installations requiring light to pass through



Strengthened Mechanical Support:
5400 Pa snow load, 2400 Pa wind load

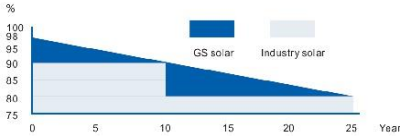

Module Diagram

Module Models

Electrical Specifications	
Model	SP100W-18V
Peak power(Pmax)	100W
Cell Efficiency	17.4%
Max. power volt.(Vmp)	17.8V
Max. power current(Imp)	5.62A
Open circuit volt.(Voc)	21.8V
Short circuit current(Isc)	6.05A
Power Tolerance	±3%
Max. system voltage	1000V
Series fuse rating(A)	12
Number of bypass diode	2
Operating temperature	-40°C to +85°C
Maximum system voltage	1000V DC
STC: Irradiance 1000W/m ² , Module temperature 25°C, AM=1.5	
Mechanical Characteristics	
Dimensions	1030*670*30mm
Weight	7.2kg
Solar Cells	36 cell in series
Cable	LAPP (2.5mm ²)
lengths	700mm(-) and 700mm(+)
Connector	Mc4 Plug Type
Glass type	High transmits, Low Iron, 3.2mm Tempered Glass
Frame	Aluminium-alloy