

Mono PERC Solar Module

355W/360W/365W/370W



High Module Conversion Efficiencies



Easy Installation and Handling for Various Applications



Mechanical Load Capability of up to 5400 Pa





Conforms with IEC 61215:2005,
IEC 61730:2004, UL 1703 PV Standards



ISO9001, OHSAS18001, ISO14001 Certified



Application Class A, Safety Class II, Fire Rating C

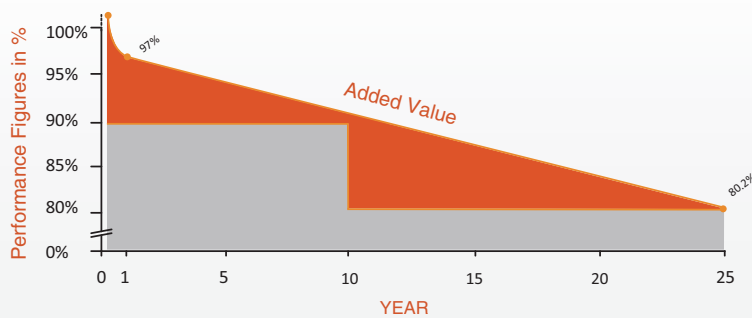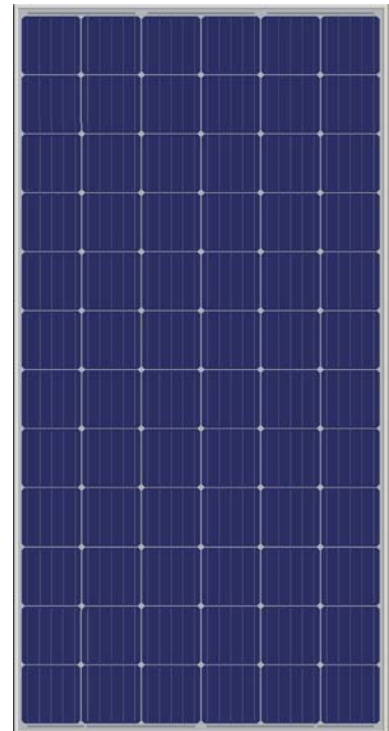


10-year
material & workmanship

25-year
linear power output




Dimensions

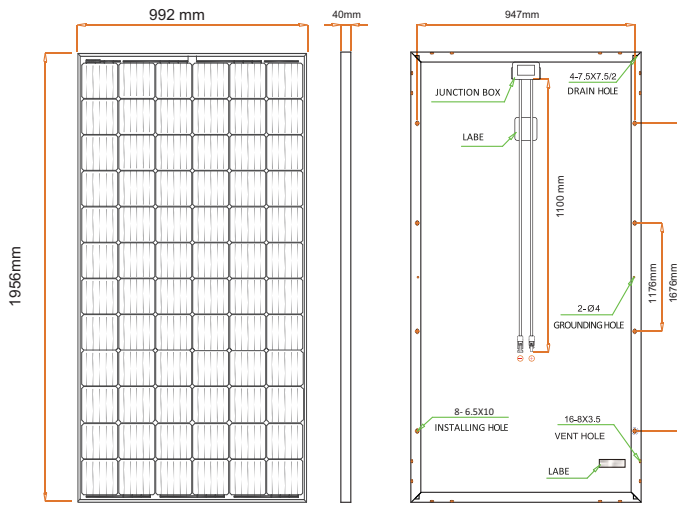

Drawing Only For Reference

I-V Curves

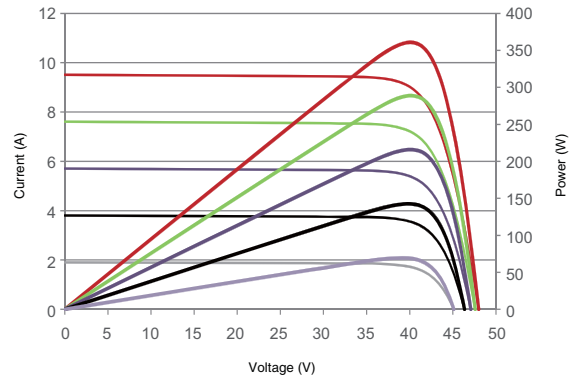

Electrical Characteristics STC

	JC355S-24/Abw	JC360S-24/Abw	JC365S-24/Abw	JC370S-24/Abw
Maximum Power (Pmax)	355 W	360W	365 W	370 W
Power Tolerance	0~+5W	0~+5W	0~+5 W	0~+5 W
Module Efficiency	18.30%	18.57%	18.83%	19.08%
Maximum Power Current (Imp)	8.99 A	9.10 A	9.18 A	9.28 A
Maximum Power Voltage (Vmp)	39.5 V	39.6 V	39.8 V	39.9 V
Short Circuit Current (Isc)	9.58 A	9.63 A	9.72 A	9.81 A
Open Circuit Voltage (Voc)	47.5 V	47.6 V	47.7 V	47.8 V

Values at Standard Test Conditions STC (AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Electrical Characteristics STC

	JC355S-24/Abw	JC360S-24/Abw	JC365S-24/Abw	JC370S-24/Abw
Maximum Power (Pmax)	260 W	266 W	270 W	274 W
Maximum Power Current (Imp)	7.29 A	7.41 A	7.50 A	7.59 A
Maximum Power Voltage (Vmp)	35.7 V	35.9 V	36.0 V	36.1 V
Short Circuit Current (Isc)	7.68 A	7.79 A	7.92 A	8.03 A
Open Circuit Voltage (Voc)	43.9 V	44.1 V	44.2 V	44.3 V

Values at Normal Operating Cell Temperature, Irradiance of 800W/m², AM1.5, Ambient Temperature 20°C, Wind Speed 1m/s.

Electrical Characteristics NOCT

Cell Type	157×157(±1) mm , Mono PERC , 72 (6x12) pcs in series
Glass	High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP68 Rated, With Bypass Diodes
Dimension	*1956 x 992 x 40 mm
Output Cable	4 mm ² (EU)/12 AWG (US), 1100 mm
Weight	23kg
Installation Hole Location	See Drawing Above

Characteristics

Temperature Coefficient of Voc	-0.31%/°C
Temperature Coefficient of Isc	0.03%/°C
Temperature Coefficient of Pmax	-0.43%/°C
Nominal Operating Cell Temperature (NOCT)	45°C±2°C

Packing Information

	20' GP	40' GP	40' HQ
Container	20' GP	40' GP	40' HQ
Pallets per Container	10	24	24
Pieces per Container	260	624	684

Maximum Ratings

Operating Temperature	-40°C ~ +85°C
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A

Mono PERC Solar Module

355W/360W/365W/370W



High Module Conversion Efficiencies



Easy Installation and Handling for Various Applications



Mechanical Load Capability of up to 5400 Pa





Conforms with IEC 61215:2005,
IEC 61730:2004, UL 1703 PV Standards



ISO9001, OHSAS18001, ISO14001 Certified



Application Class A, Safety Class II, Fire Rating C

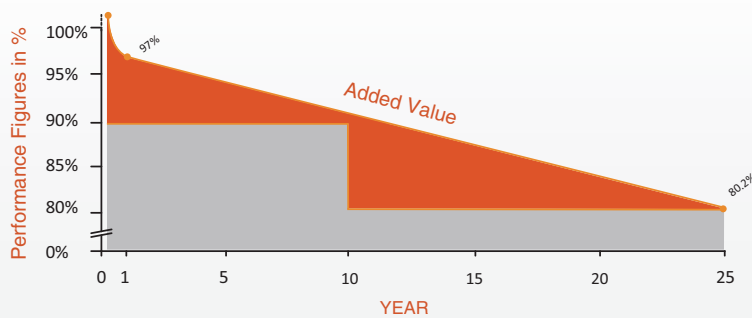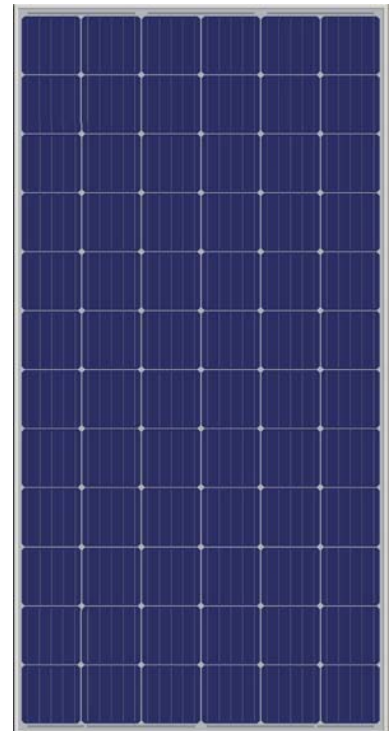


10-year
material & workmanship

25-year
linear power output




Dimensions

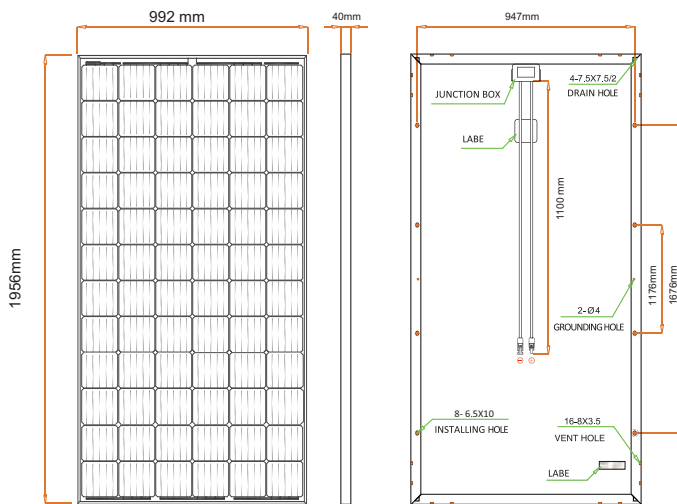

Drawing Only For Reference

I-V Curves

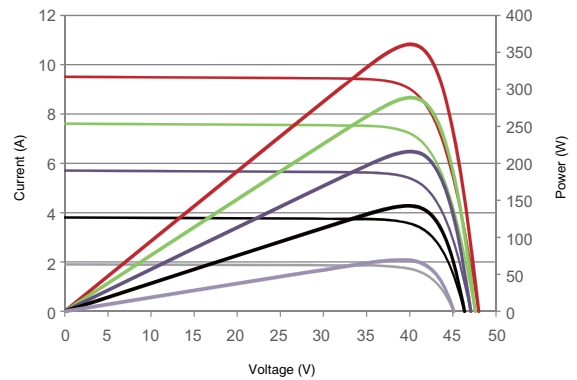

Electrical Characteristics STC

Electrical Characteristics STC	JC355S-24/Abpw	JC360S-24/Abpw	JC365S-24/Abpw	JC370S-24/Abpw
Maximum Power (Pmax)	355 W	360 W	365 W	370 W
Power Tolerance	0~+5W	0~+5W	0~+5 W	0~+5 W
Module Efficiency	18.30%	18.57%	18.83%	19.08%
Maximum Power Current (Imp)	8.99 A	9.10 A	9.18 A	9.28 A
Maximum Power Voltage (Vmp)	39.5 V	39.6 V	39.8 V	39.9 V
Short Circuit Current (Isc)	9.58 A	9.63 A	9.72 A	9.81 A
Open Circuit Voltage (Voc)	47.5 V	47.6 V	47.7 V	47.8 V

Values at Standard Test Conditions STC (AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Electrical Characteristics STC

Electrical Characteristics STC	JC355S-24/Abpw	JC360S-24/Abpw	JC365S-24/Abpw	JC370S-24/Abpw
Maximum Power (Pmax)	260 W	266 W	270 W	274 W
Maximum Power Current (Imp)	7.29 A	7.41 A	7.50 A	7.59 A
Maximum Power Voltage (Vmp)	35.7 V	35.9 V	36.0 V	36.1 V
Short Circuit Current (Isc)	7.68 A	7.79 A	7.92 A	8.03 A
Open Circuit Voltage (Voc)	43.9 V	44.1 V	44.2 V	44.3 V

Values at Normal Operating Cell Temperature, Irradiance of 800W/m², AM1.5, Ambient Temperature 20°C, Wind Speed 1m/s.

Electrical Characteristics NOCT

Cell Type	157×157(±1) mm , Mono PERC , 72 (6x12) pcs in series
Glass	High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP68 Rated, With Bypass Diodes
Dimension	*1956 x 992 x 40 mm
Output Cable	4 mm ² (EU)/12 AWG (US), 1100 mm
Weight	23kg
Installation Hole Location	See Drawing Above

Characteristics

Temperature Coefficient of Voc	-0.31%/°C
Temperature Coefficient of Isc	0.03%/°C
Temperature Coefficient of Pmax	-0.43%/°C
Nominal Operating Cell Temperature (NOCT)	45°C±2°C

Packing Information

	20' GP	40' GP	40' HQ
Container	20' GP	40' GP	40' HQ
Pallets per Container	10	24	24
Pieces per Container	260	624	684

Maximum Ratings

Operating Temperature	-40°C ~ +85°C
Maximum System Voltage	1500VDC
Maximum Series Fuse Rating	20A