




Maxima GxB 330T SM


Bifacial Smart Module


A Trusted Quality Brand in Solar


- 


High Performance
Bifacial technology generates power from both the front and back faces of the module, resulting in up to 20% higher energy harvest (kWh). Our HCT cells packaged in frameless double glass modules yield higher power and do not suffer from light-induced degradation (LID) or potential induced degradation (PID).
- 

Integrated Optimizer with TIGO TS4-L
Impedance Matching Technology results in enhanced energy yield at string level. AC/DC output at string level up to 0.95.
- 

Longer Strings: String length increased up to 30%
Less BOS. Faster Installation. Lower Costs
- 

Safety, Enhanced O&M
NEC 2014 & 2017 Rapid Shutdown Compliant Module-level Monitoring
- 

Robust Quality & Reliability
Double glass modules designed for durability. Certified to international certification body standards: IEC, UL, and CEC listed. Manufactured according to the International Quality Management System ISO9001.
- 

Extreme Climate Performance
As temperatures rise, our patented Hybrid Cell Technology produces more power [kW] than conventional crystalline silicon solar panels at the same elevated temperature.
- 

Superior Aesthetics
Thin profile double-glass construction provides superior aesthetics that are a perfect complement to roofs, carports, and canopies.

About Sunpreme


Sunpreme is an innovative solar PV module manufacturer headquartered in Sunnyvale, California with manufacturing facilities in the United States and China. We provide high quality, reliable and aesthetically superior modules to residential, commercial, and utility customers globally. Sunpreme solar systems are delivering clean energy on 5 continents.

Sunpreme solar panels are designed and engineered in Silicon Valley, CA, USA.

Hybrid Cell Technology

Sunpreme modules use our patented Hybrid Cell Technology platform that utilize enabling thin-film materials on surface engineered Silicon substrate to achieve high-efficiency power output and reliable energy production for increased project returns.

Unlike conventional crystalline silicon cell technologies, Sunpreme uses highly scalable process to deliver high output solar power at very competitive Levelized Cost of Energy (LCOE).

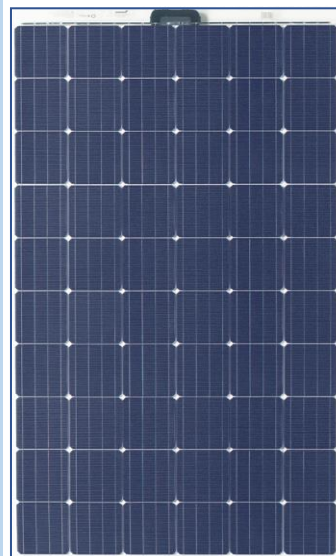

Front View



Back View

High Efficiency

- 19.7% Module Efficiency (STC)
- 21.7% Module Efficiency with 10% Backside Power Boost
- 23.6% Module Efficiency with 20% Backside Power Boost

Bifacial Energy Boost

Harvests sun from the backside to increase power output up to 20%

Double-Glass Framed Design

Sunpreme Design is more robust, and does require module grounding


15 YEAR

PRODUCT WARRANTY

30 YEAR

POWER WARRANTY

"At 22%, Sunpreme HCT Bifacial Double Glass modules move to the top of the class in effective efficiency" Dr. Eicke Weber quoted in:
<http://www.pv-magazine.com/news/details/beitrag/sunpreme-unveils-500-w-bifacial-double-glass-module-with-22-efficiency-100016882/#ixzz4580N3Rh4>

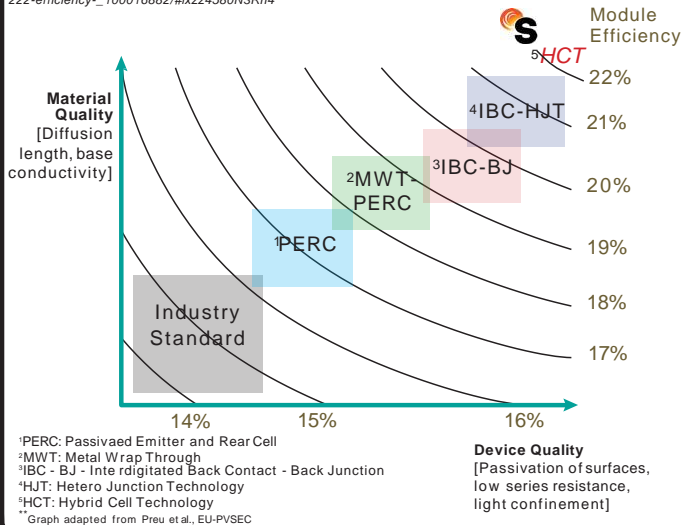

ELECTRICAL SPECIFICATIONS¹

STC rated output P_{mpp} (W)	310	320	330
Cell Efficiency	21.8%	22.0%	22.2%
Module Efficiency	18.5%	19.1%	19.7%
Standard sorted output	-3%/5%	-3%/5%	-3%/5%
Maximum Voltage (V) For TS4-L	39.5	39.7	39.9
Maximum current (A)	12.0	12.0	12.0
Rated Voltage V_{mpp} (V)	36.0	36.5	37.1
Open Circuit Voltage V_{oc} (V)			
TS4 -O,M,S,D	43.8	44.0	44.2
Rated Current I_{mpp} (A)	8.7	8.8	8.9

1: Standard Test Conditions for front-face of panel: 1000 W/m², 25°C

BIFACIAL OUTPUT*

With 10% Backside PowerBoost

Power Output (W)	341	352	363
Module Efficiency	20.3%	21.0%	21.7%

With 20% Backside PowerBoost

Power Output (W)	372	384	396
Module Efficiency	22.2%	22.9%	23.6%

*Backside boost for flush mount configuration is ≤5%, resulting in I_{sc} ≤ 9.56-9.77A

TEST OPERATING CONDITIONS

Operating Temperature	-40 to 85°C
Storage Temperature	-40 to 85°C
Maximum Series Fuse	15 A
Maximum System Voltage	1,000 VDC (UL & IEC)
Power/Sq. Ft. w/ 20% backside power boost	22.0 W/Sq. Foot
Maximum load capacity	5,400 PA (snow load) 185 mph/300 km/h wind rating
Fire Class	Class A

TEMPERATURE COEFFICIENTS

Temperature coefficients P_{mpp}	-0.28%/C
Temperature coefficients I_{sc}	+0.015%/C
Temperature coefficients V_{oc} TS4-L (-O,M,S,D)	0.00%/C (-0.23%/C)
Normal operating cell temperature (NOCT) ^o	46°C +/- 2° C

WARRANTY

15-year extended product warranty
97.5% power warranty first 5 years
-0.5% per year degradation for the following 25 years

CERTIFICATION

Certified to IEC 61646, IEC 61730-01, IEC 61730-02, IEC 61701, UL 1703 and CEC (in progress), ISO 9001, ISO 14001, CE Mark, FSEC, MCS, and TUV



MECHANICAL SPECIFICATIONS


Dimensions	1681 x 997 x 40 mm (5.52 x 3.27 x 0.13 ft)
Weight	27.0 kg (59.5 lbs)
Area	1.68 m ² (18.1 ft ²)
Cell Type	Bifacial Hybrid Cell Technology (HCT)
Module Type	60 Cells, Framed double glass design with tempered glass
Glass	Tempered 2.9 mm anti-reflective coating, low iron
Smart Junction Box	Tigo TS4-Platform
Cables	4 mm ² x 1.2 m cable with MC4 connectors or MC4 Compatible Connectors

PACKAGING


Modules per crate	24
Crate per shipping container	28

$I_{max} - V_{max}$ (60 cell Version)


Multi-Irradiance Curve for Maxima GxB 330T SM

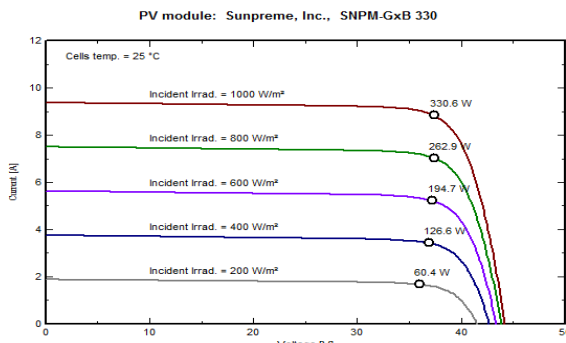


Recommended Mounting methods

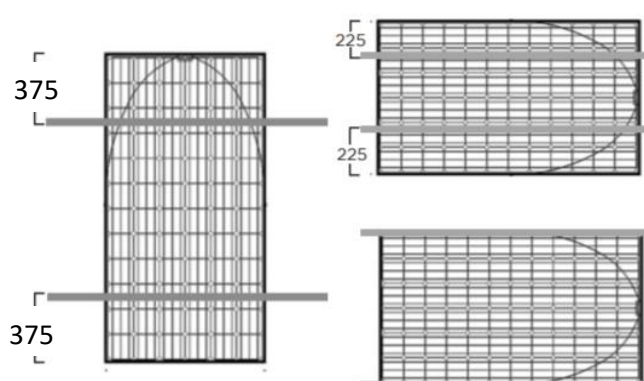

Frame Profile



System Architecture Overview*

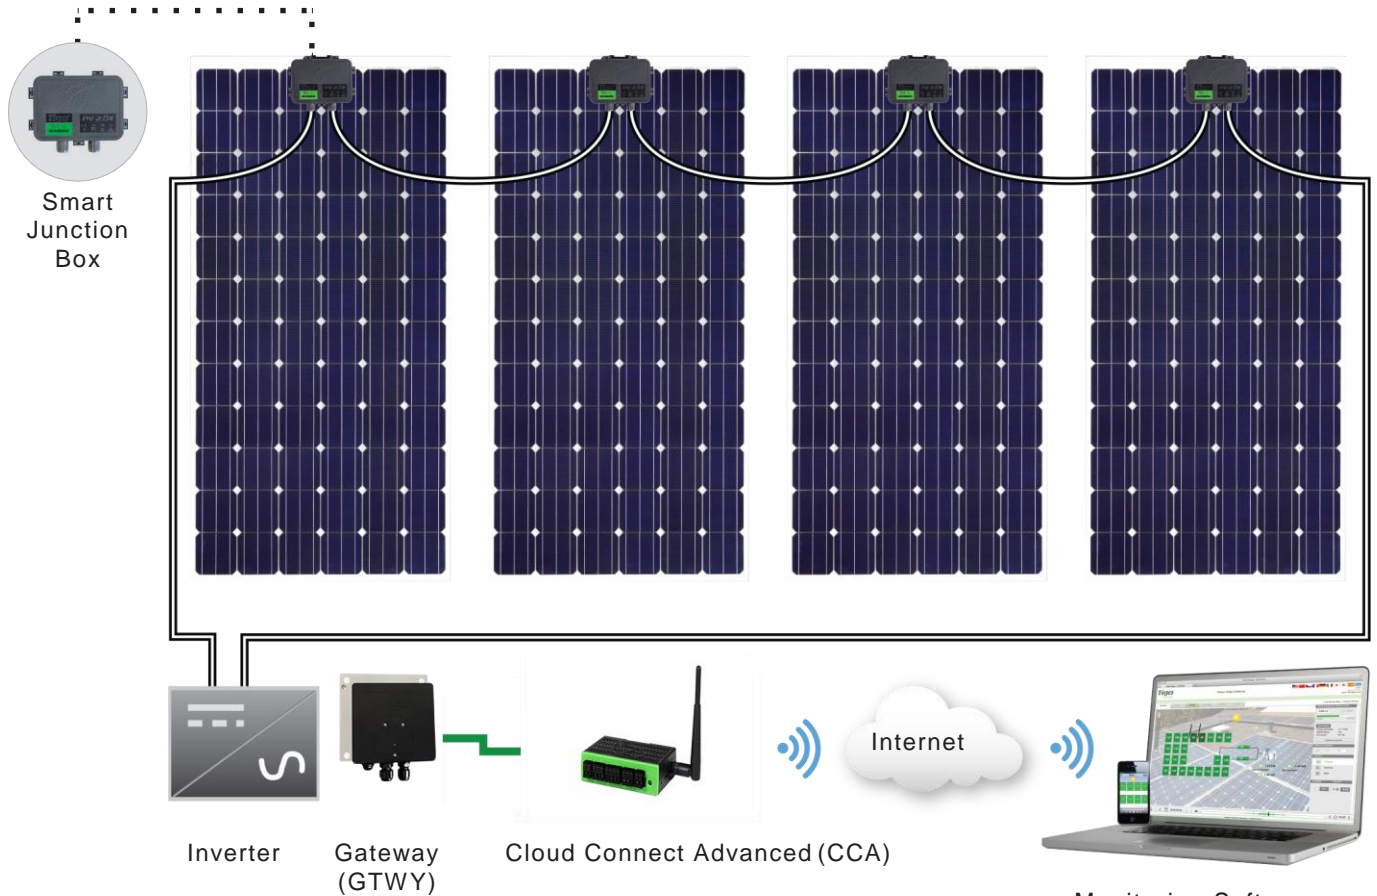

*Note: This system architecture overview is applicable when using TS4-L, -O, -S, and -M. TS4-F and -D does not use the GTWY, CCA or Monitoring Software

Monitoring Software
for Systems Management

Connectivity Detail

Cloud Connect Advanced

- Can connect with up to 7 GTWYs and 360 PV modules
- All Smart Modules in the same string must be assigned to the same CCA

Gateway

- Can connect up to 300 PV modules
- Maximum distance from GTWY to closest TS4: 10m(33ft)
- Maximum distance from GTWY to farthest TS\$: 70m(230ft)



Cloud Connect

The Cloud Connect is the data logger and communication hub of the Tigo smart platform. It controls optimization, provides safety features, and enable module-level monitoring via the Tigo cloud. It also acts as a data logger for Modbus-equipped devices, like AC meters, weather stations, and selected inverters. The Cloud Connect is the next generation Management Unit.

- Built-in Wi-Fi
- Free iOS/Android app for monitoring and commissioning
- Easy-to-install DIN rail form factor

Electrical Specifications

Electrical

Supply Voltage: 24VDC +/- 1VDC

Power Consumption: Max 16W

Power Supply: 100-240VAC

Din Rail: Terminal Block or;

Socket: EU/UK/US/AU Interchangeable, 2-Pin Plug

Capacity

Single Cloud Connect supports up to 360 PV Modules
(In case of 2Es: 180 Optimizers)

Single Cloud Connect supports up to 7 Tigo Gateways

Internet Connectivity Options

Ethernet Interface: 10/100-BaseT

Wireless Interface: Wi-Fi

Mechanicals

Mounting Type: DIN Rail, mountable enclosure

Dimensions: 159.5 mm x 90.2 mm x 57.5 mm (6.28" x 3.55" x 2.26")

Weight: 0.158 kg/0.348 lb.

Operating Temperature Range: -20 to +70°C (-4 to 158°F)

Cooling: Natural Convection - No Fans

Enclosure: Indoor NEMA 1

Features

Safety: CE, UL1741, EN62109,-1:2010, NEC 690.12 Rapid Shutdown (Approval Pending)

EMC: FCC Part 15, IC Canada, VCCI Japan

Optional Accessories

NEMA 3R Outdoor-Rated Enclosure

External Emergency Safety Button (ANSI/UL) Recognized



Gateway

The Tigo Energy Gateway provides robust and scalable wireless communications with each smart module. This solution provides clear, concise communication with the smart modules on the array, vastly exceeding the quality of data transmission over previous powerline methods.

Each Gateway can communicate with up to 120 smart modules and easily combines with other Gateways to accommodate larger arrays.

Electrical Specifications

Electrical

Supply Voltage: 24VDC +/- 1VDC

Power Consumption: Max 10W

Power Supply: 100-240VAC

Din Rail: Terminal Block or;

Socket: EU/UK/US/AU Interchangeable, 2-Pin Plug

Gateway

Communications with Maximizer

Wireless (802.15)

Communication with Cloud Connect

RS-485 cable connection; in series with other Gateways

Mounting Location

Center of array

Mounting Method

Mounted to module frame or rack. Clips included for framemounting

Wireless Range

50ft (15m) line-of-sight

Maximum Number of Modules per Gateway

120

Mechanical Specifications

Mechanical Data

Dimensions (W x H x D)

141.3 x 48.5 x 33.3 mm w/bracket

Weight

900 gm (1.98 lbs.)

Operating Temperature Range

-30°C + 70°C (-86°F + 158°F)

Enclosure Environmental Rating

IP 65

TS4

Mechanical

Ambient Temperature Range

-40 to + 85°C (-40 to +185°F)

Storage Temperature Range

-40 to + 85°C (-40 to +185°F)

Cooling Method

Natural Convection

Dimensions (with cover)

152.5 x 108 x 25 mm

Weight

550 g (1.20lbs.)

Environmental Rating

IP65/67, NEMA 3R

Cabling

Cabling Type

PV1-F, PV wire

Cable Length

1.0 m / other lengths per request

Connector

MC4, MC4 Compatible, Amphenol, EVO2

UV Resistance

500 hr with UVB light between 300-400 nm @ 65°C

Maximum String Voltage

1000V UL

Outer Cable Diameter

IP65/67, NEMA 3R

Wire Cross Section

4.0 mm² (12AWG)