

### Electrical Data

Model - STC		TMM295-6	TMM300-6	TMM305-6	TMM310-6	TMM315-6	TMM320-6
Maximum Rating Power (Pmax)	[W]	295	300	305	310	315	320
Module Efficiency	[%]	18.1	18.4	18.7	19.1	19.4	19.7
Open Circuit Voltage (Voc)	[V]	39.27	39.39	39.49	39.75	39.99	40.07
Maximum Power Voltage	[V]	31.86	32.09	32.35	32.57	32.78	32.80
Short Circuit Current (Isc)	[A]	9.73	9.78	9.86	9.91	9.96	10.28
Maximum Power Current	[A]	9.26	9.35	9.43	9.52	9.61	9.76

\*Standard Test Condition (STC): Cell Temperature 25 °C, Irradiance 1000 W/m<sup>2</sup>, AM 1.5

\*Values without tolerance are typical numbers.

### Mechanical Data

Item	Specification
Dimensions	1640 mm (L) <sup>1</sup> x 992 mm (W) <sup>1</sup> x 35 mm (D) <sup>2</sup> / 64.5" (L) <sup>1</sup> x 39.1" (W) <sup>1</sup> x 1.38" (D) <sup>2</sup>
Weight	18 kg / 39.7 lbs
Solar Cell	60 monocrystalline 6" silicon cells
Front Glass	Anti-reflective tempered solar glass, 3.2mm thickness
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Cover	Composite film, white
Junction Box	IP 67 rated
Frame	Anodized aluminum frame, original or black
Packaging Configuration	30 pcs Per Pallet, 896 pcs per 40' HQ container

### Operating Conditions

Item	Specification
Mechanical Load	5400 Pa (Certified by TUV Rheinland)
Maximum System Voltage	TUV/UL 1000 VDC
Series Fuse Rating	15 A
Operating Temperature	-40 to 85 °C


### Temperature Characteristics

Item	Specification
Nominal Module Operating Temperature	44°C ± 2°C
Temperature Coefficient of Isc	0.06 % / °C
Temperature Coefficient of Voc	-0.28 % / °C
Temperature Coefficient of Pmax	-0.38 % / °C


\*Nominal module operating temperature (NMOT): Air mass AM 1.5, irradiance 800W/m<sup>2</sup>, temperature 20°C, windspeed 1 m/s.

\*Reduction in efficiency from 1000W/m<sup>2</sup> to 200W/m<sup>2</sup> at 25°C: 3 ± 2%.

### Dependence on Irradiance

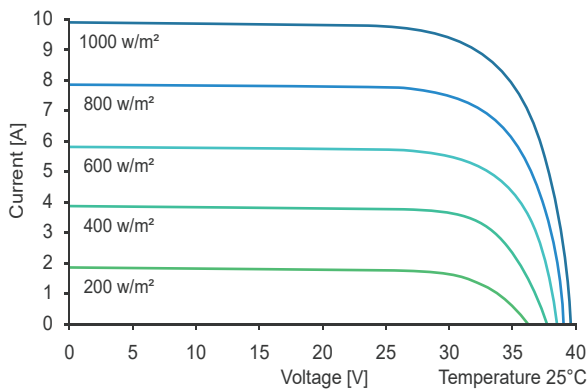


### Reliability with Warranty

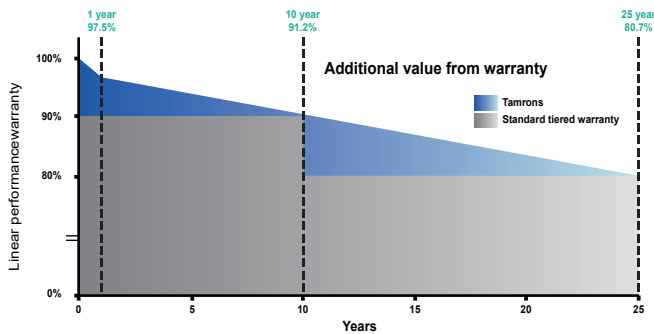

Output warranty  
**25**  
Years

Product Guarantee  
**10**  
Years

### Engineering Drawing (mm)

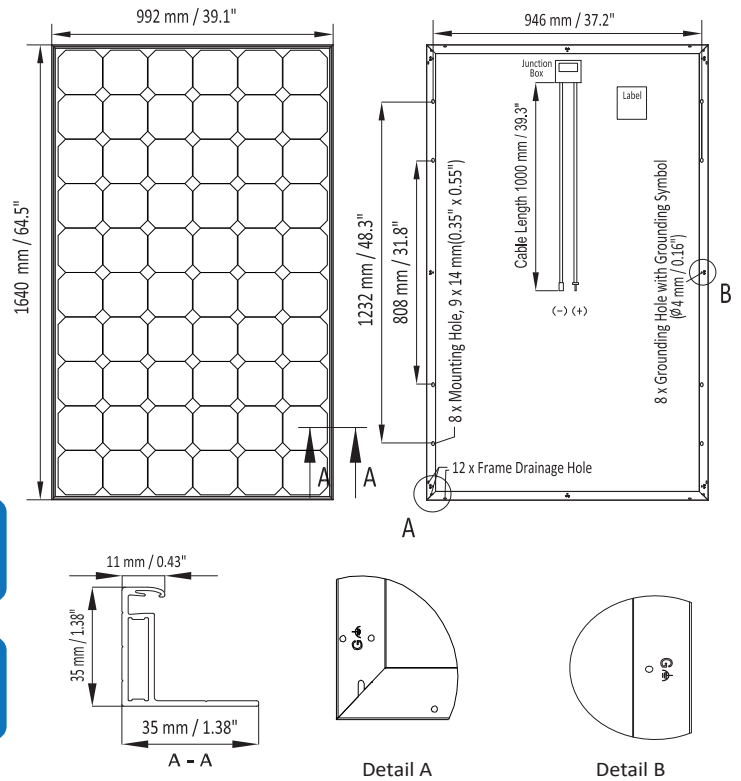

\* The datasheet is for informational purposes only and subject to change without prior notice. Copyright © 2018 TAMRONS All rights reserved.



Positive Power Tolerance +0 ~ +4.99 w



Withstand Heavy Loading  
Front load 5400 Pa & Rear Load 2400 Pa



Excellent Low Light Performance  
3.5% relative eff. reduction at low-irradiance (200w/m<sup>2</sup>)



**Tamrons Active International Limited**

web: www.tamrons.com; mail: sales@tamrons.com

Production plants in China, Taiwan, Dubai and Thailand

can meet the customer's needs and brand OEM

